





RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au1U
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

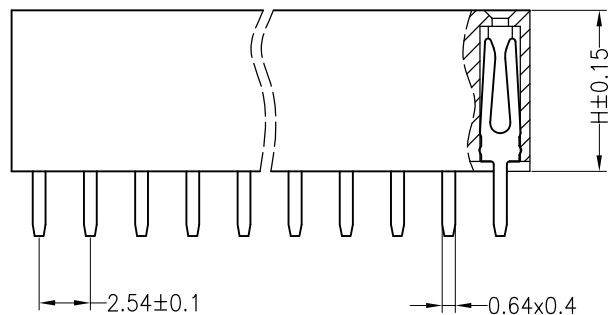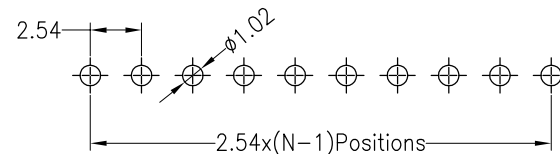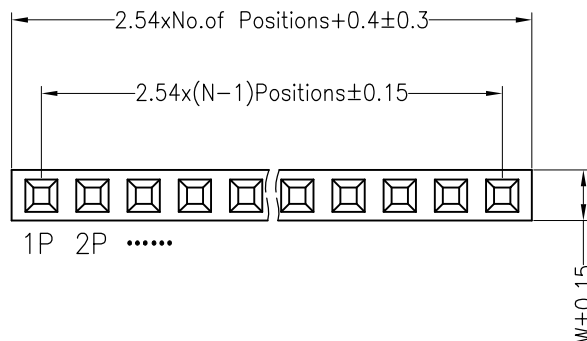

Ordering Information

F 3 N 1 18 1 5 01 5 1243
 产品类型 间距 额定高度 排数 单排PIN数 产品形态 绝缘材料 电镀厚度 包装方式 序列号
 F=排母 3=2.54 N=8.5 1=单排 18=1-40P 1=DIP 5=PA6T 00=无镀 01=1u" 02=2u" 03=3u" 1=管装 2=卷装 3=盘装 4=袋装 5=盒装

Dimension antitheses list					
ITEM	PB	PC	PW	H	W
001		3.0		8.5	2.5
002					

				OPERATION		DRAW		SCALE		FIT		深圳市连盛精密连接器有限公司	
				X.X	±0.30			UNIT	mm				
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.		1020300820	
A0	2014.03.28	NEW DRAWING		X.XXX	±0.10			SHEET	1/1	TITLE:		2.54FH H=8.5 W=2.5 1*18P DIP PC3.0 Y型 AU1U 青铜 PA6T	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	APPROVE	PROJ.	◆				
1	2	3	4	5	6	7	8	9					