





RoHS

SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

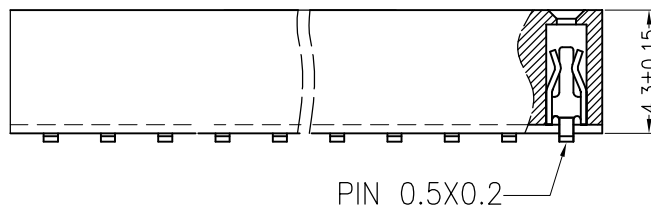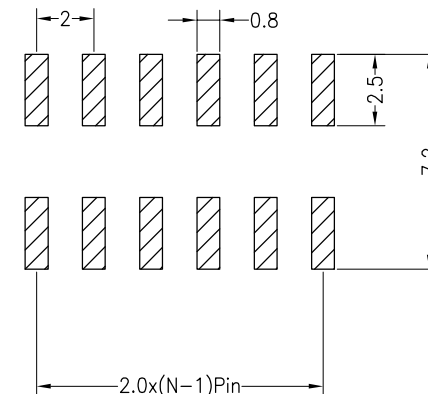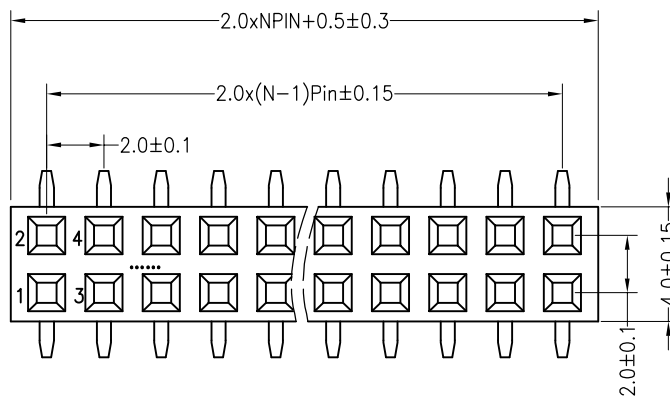

Dimension antitheses list					
ITEM	PB	PC	PW	H	W
001	4.6		6.2	4.3	4.0
002					

深圳市连盛精密连接器有限公司

PART NO. 1020200391

TITLE: 2.0FH H=4.3 W=4.5 2*10P SMT=6.2 总高4.6
 U型 AU1U 青铜 PA6T

OPERATION

DRAW

SCALE

FIT

X.X ±0.30

CHECK

UNIT

mm

X.XX ±0.20

APPROVE

SIZE

A4

X.XXX ±0.10

Angle ±3°

SHEET

1/1

DIM TOL

PROJ.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	SCALE	FIT	PART NO.	TITLE:
1	2	3	4	5	6	7	8	9	