





RoHS

SPECIFICATIONS

Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

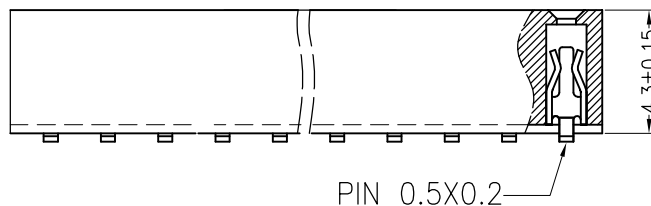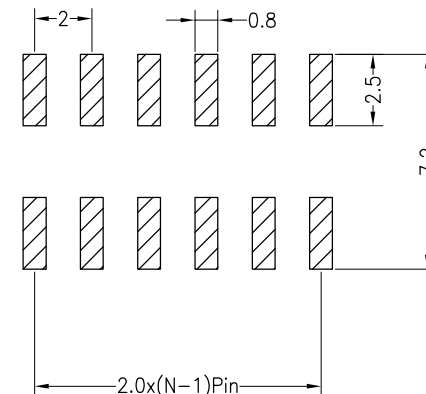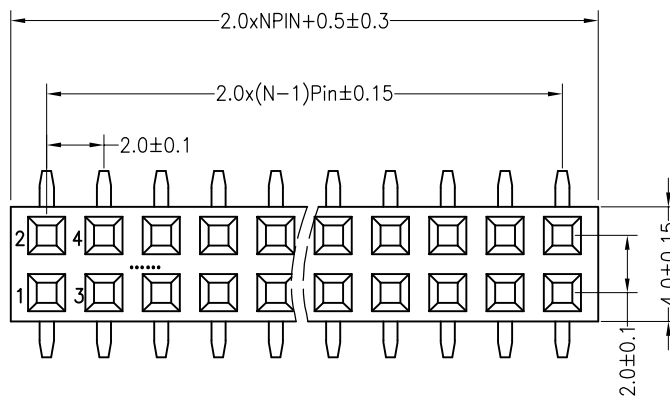

Dimension antitheses list					
ITEM	PB	PC	PW	H	W
001	4.6		6.2	4.3	4.0
002					

深圳市连盛精密连接器有限公司

OPERATION

DRAW

SCALE

FIT

X.X ±0.30

CHECK

UNIT

mm

X.XX ±0.20

APPROVE

SIZE

A4

X.XXX ±0.10

Angle ±3°

SHEET

1/1

DIM TOL

PROJ.

PART NO.

1020200182

TITLE:

2.0FH H=4.3 W=4.5 2x16P SMT=6.2 总高4.6  
 U型 AU1U 青铜 PA6T

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	SCALE	FIT	PART NO.		TITLE:
1	2	3	4	5	6	7	8	9	