





RoHS

SPECIFICATIONS

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au Or Tin Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

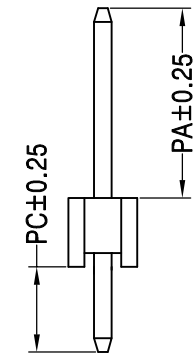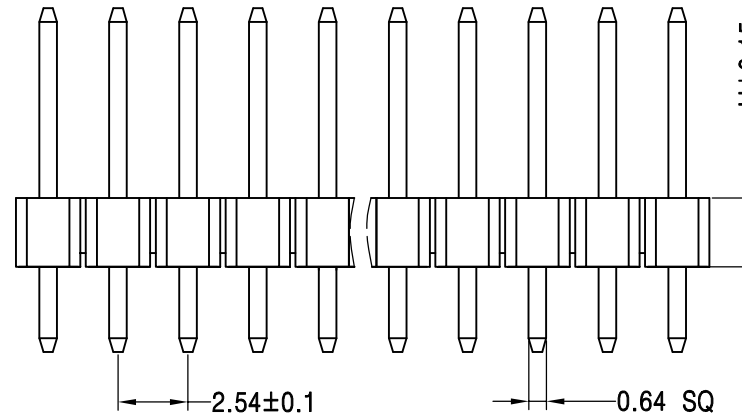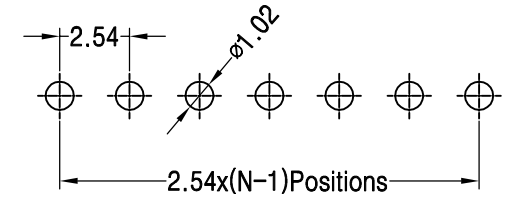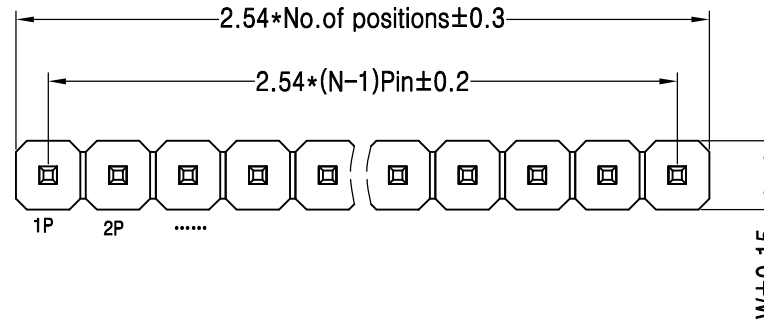

Ordering Information

**P 3 D 1 10 1 5 00 X 0021**

产品类型 P=排针  
 间距 3=2.54  
 塑胶高度 D=2.5  
 排数 1=单排  
 单排PIN数 1~40P  
 产品形态 1=DIP  
 塑胶材料 5=PA6T  
 电镀厚度 00=常規  
 包装方式 1=管裝  
 2=卷裝  
 3=盘裝  
 4=袋裝  
 5=盒裝  
 序列号 0021

Dimension antitheses list								
ITEM	PA	PW	PC	L1	L2	L3	H	W
001	6.0		3.0	11.5			2.5	2.5
Alternate								

				OPERATION		DRAW		SCALE		FIT		深圳市连盛精密连接器有限公司 PART NO. 1010300030 TITLE: 2.54PH H=2.5 1x10P DIP PA6.0 PC3.0 L=11.5 AU0.6U PA6T	
				X.X	±0.30			UNIT	mm				
				X.XX	±0.20	CHECK		SIZE	A4				
				X.XXX	±0.10			SHEET	1/1				
A0	2012.03.28	NEW DRAWING		Angle	±3°	APPROVE		PROJ.	☛				
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL								