





RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Or Tin Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

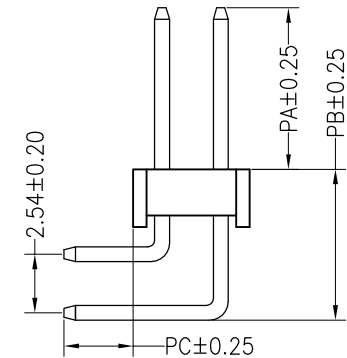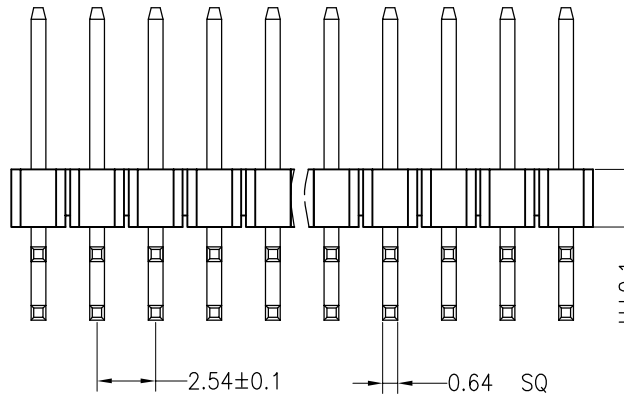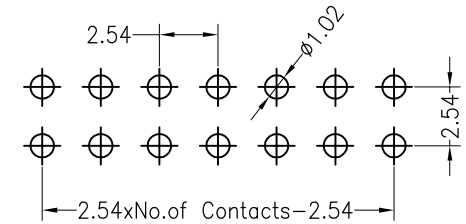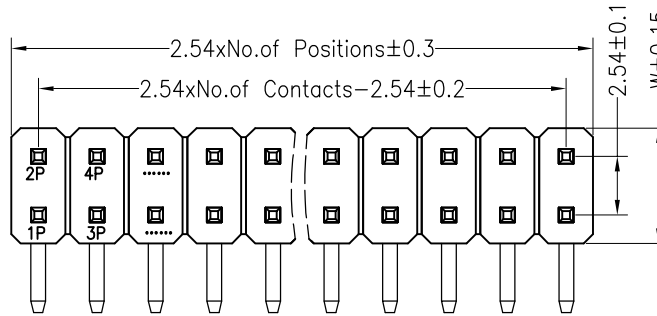

Dimension antitheses list								
ITEM	PA	PB	PC	L1	L2	L3	H	W
001	6.0	6.9	3.0	13.8	18.8		2.5	5.0
Alternate								

				OPERATION		DRAW		SCALE		FIT		<p style="text-align: center;">深圳市连盛精密连接器有限公司</p>		
				X.X	±0.30			UNIT	mm					
				X.XX	±0.20	CHECK		SIZE	A4					
				X.XXX	±0.10			SHEET	1/1	PART NO.				1010301442
				Angle	±3°	APPROVE		PROJ.		TITLE:				2.54PH H=2.5 2*8P 正弯 PA6.0 PB6.9 PC3.0 L=13.8/18.8 AU0.6U PA6T
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL									
1	2	3	4	5	6	7		8		9				

A

B

C

D

E

F

G