

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass





Contact Plating:Au Or Tin Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

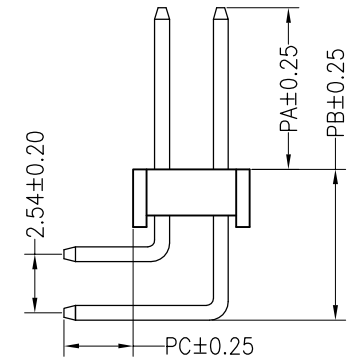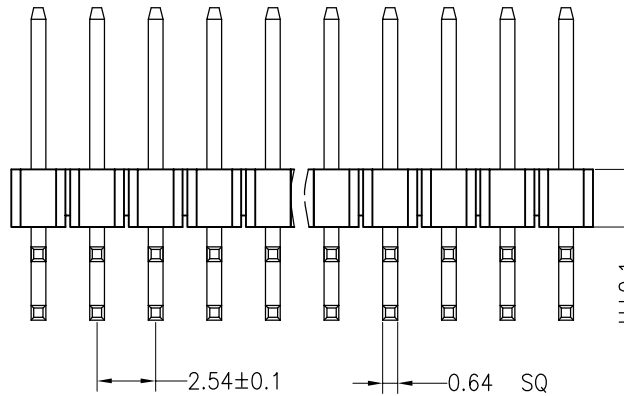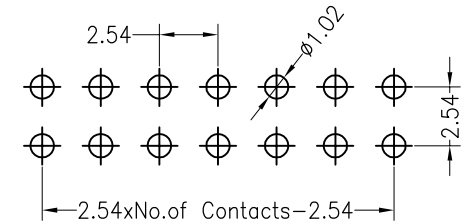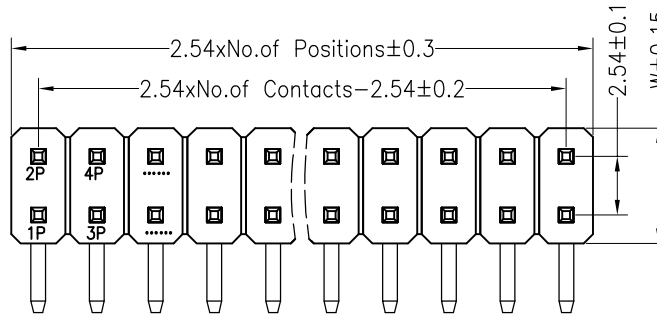

Dimension antitheses list								
ITEM	PA	PB	PC	L1	L2	L3	H	W
001	6.0	6.9	3.0	13.8	18.8		2.5	5.0
Alternate								

				OPERATION		DRAW		SCALE		FIT		深圳市连盛精密连接器有限公司	
				X.X	±0.30			UNIT	mm				
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.		1010301444	
A0	2012.04.11	NEW DRAWING		X.XXX	±0.10	APPROVE		SHEET	1/1	TITLE:		2.54PH H=2.5 2*13P 正弯 PA6.0 PB6.9 PC3.0 L=13.8/18.8 AU0.6U PA6T	
REV	DATE	MODIFICATION DESCRIPTION		Angle	±3°			PROJ.	☉				
1	2	3	4	5	6	7	8	9					