





RoHS

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au1U
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

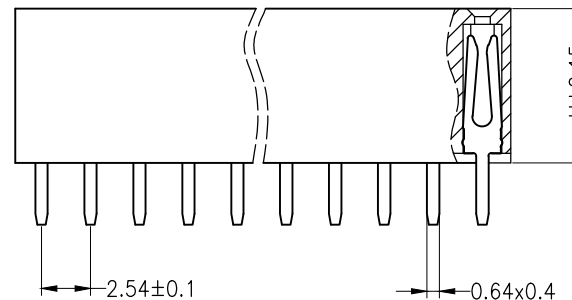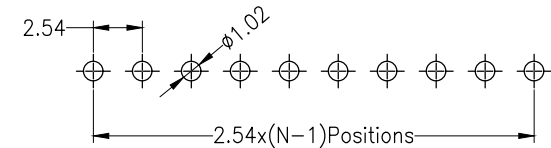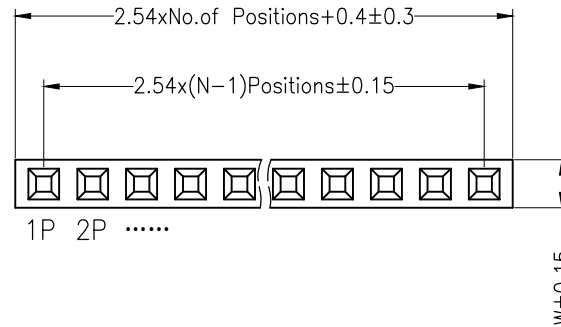

Dimension antitheses list					
ITEM	PB	PC	PW	H	W
001		3.0		8.5	2.5
002					

OPERATION		DRAW	SCALE	FIT
X.X	±0.30			
X.XX	±0.20	CHECK	UNIT	mm
X.XXX	±0.10		SIZE	A4
Angle	±3°	APPROVE	SHEET	1/1
DIM	TOL		PROJ.	◆

深圳市连盛精密连接器有限公司

PART NO.	1020300653
TITLE:	2.54FH H=8.5 W=2.5 1*25P DIP PC3.0 Y型 AU1U 青铜 PA6T

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2014.03.28	NEW DRAWING	

Grid labels: 1-9 (horizontal), G (vertical)