

Specification Sheet

Terminal Pad Solderability

Meets EIA Specification RS186-9E
And ANSI/J-STD-002 Category 3.

Terminal Pad Materials

Tin-Plated Nickel-Copper
Lead-Free, RoHS Compliant

Marking

Part Identification
ASMD1206-020-30V = JA

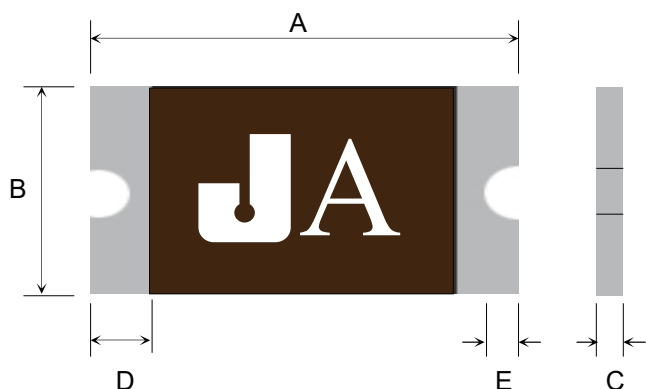


TABLE I. DIMENSIONS

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
ASMD1206-020-30V	3.00	3.60	1.50	1.90	0.40	1.00	0.15	0.10

Unit: mm

TABLE II. PERFORMANCE RATINGS

Model	V_{max} (V dc)	I_{max} (A)	I_{hold} @25°C (A)	I_{trip} @25°C (A)	P_d Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	$R_{imin}(\Omega)$	$R_{1max}(\Omega)$
ASMD1206-020-30V	30.0	100	0.20	0.46	0.60	8.0	0.08	0.35	3.5

Recognition: UL Pending.