

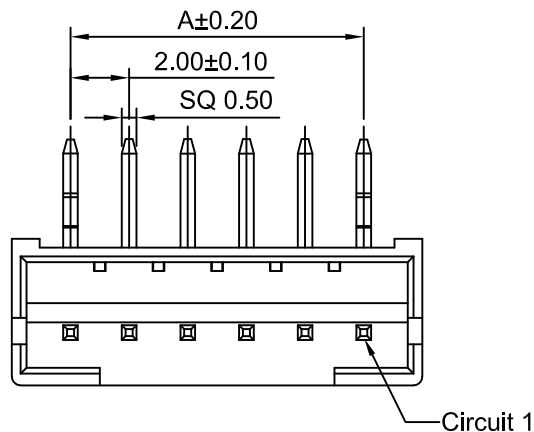
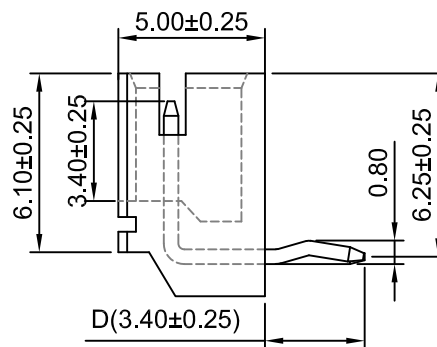


TYPE 2

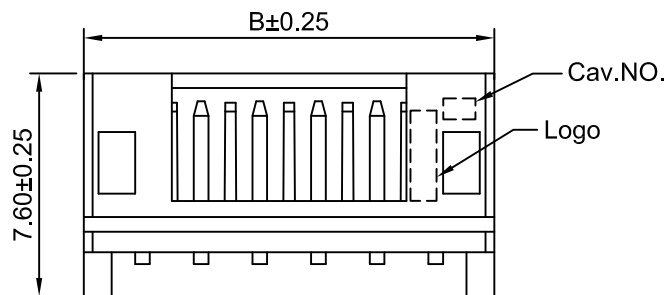

TYPE 1

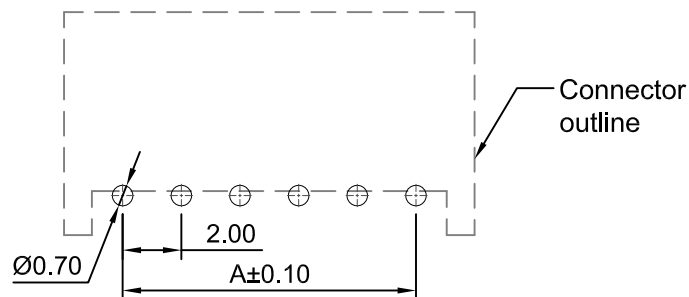

P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:
A2001WR-XP - $\frac{**}{1} - \frac{**}{2} - \frac{**}{3} - \frac{**}{4} - \frac{**}{5} - \frac{**}{6} - \frac{**}{7}$

1.PartNO.

2.Style:

(Blank): Type 1

2: Type 2

3.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th
EditionGlow Wire Capable.

4.Color:

(Blank): see section 3 Material

RD: Red GN: Green BK: Black

5.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

6.Size D:

(Blank): 3.40mm

7.Packing:

(Blank): Bag

TU: Tube

SPECIFICATIONS:

Current Rating: 3A AC,DC (MAX)

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		Part NO.	Dimensions(mm)	
	A	B		A	B
2P	2.00	6.00	12P	22.00	26.00
3P	4.00	8.00	13P	24.00	28.00
4P	6.00	10.00	14P	26.00	30.00
5P	8.00	12.00	15P	28.00	32.00
6P	10.00	14.00	16P	30.00	34.00
7P	12.00	16.00	17P	32.00	36.00
8P	14.00	18.00	18P	34.00	38.00
9P	16.00	20.00	19P	36.00	40.00
10P	18.00	22.00	20P	38.00	42.00
11P	20.00	24.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	4:1	1 of 1			
DRAWN	CHK'D	APPR'D	2.00mm PITCH 90° WAFER		
Haisen Li	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°					
A0	NEW RELEASE	2024.11.28	A2001WR-XP		A0
REV	DESCRIPTION	DATE			