


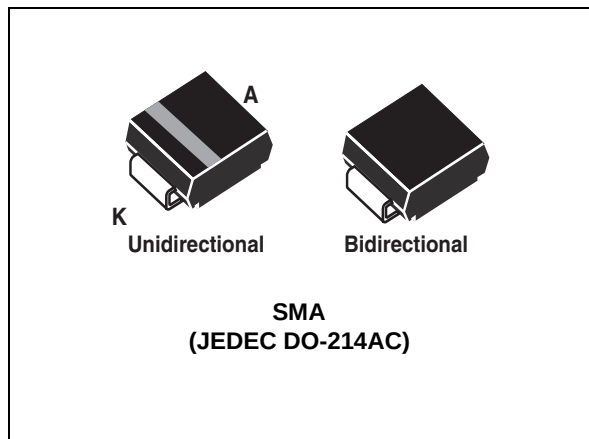

## Features

- Peak pulse power:
  - 400 W (10/1000  $\mu$ s)
  - 2.3 kW (8/20  $\mu$ s)
- Stand-off voltage range: from 5 V to 70 V
- Unidirectional and bidirectional types
- Low leakage current:
  - 0.2  $\mu$ A at 25 °C
  - 1  $\mu$ A at 85 °C
- Operating  $T_{j\max}$ : 150 °C
- High power capability at  $T_{j\max}$ :
  - 270 W (10/1000  $\mu$ s)
- JEDEC registered package outline
- Resin meets UL 94, V0
- AEC-Q101 qualified

## Complies with the following standards

- ISO 10605, C = 150 pF, R = 330  $\Omega$ :
  - 30 kV (air discharge)
  - 30 kV (contact discharge)
- ISO 10605, C = 330 pF, R = 330  $\Omega$ :
  - 30 kV (air discharge)
  - 30 kV (contact discharge)
- ISO 7637-2<sup>(a)</sup>
  - pulse 1:  $V_S = -100$  V
  - pulse 2a:  $V_S = +50$  V
  - pulse 3a:  $V_S = -150$  V
  - pulse 3b:  $V_S = +100$  V

## Description

The SM4T series has been designed to protect sensitive automotive circuits against surges defined in ISO 7637-2 and against electrostatic discharges according to ISO 10605.

The planar technology makes it compatible with high-end circuits where low leakage current and high junction temperature are required to provide reliability and stability over time. SM4TY devices are packaged in SMA (SMA footprint in accordance with IPC 7531 standard).

- a. Not applicable to parts with stand-off voltage lower than the average battery voltage (13.5 V)


## 1 Characteristics

**Table 1. Absolute maximum ratings ( $T_{amb} = 25^{\circ}C$ )**

| Symbol    | Parameter                                           |                                                       | Value        | Unit        |
|-----------|-----------------------------------------------------|-------------------------------------------------------|--------------|-------------|
| $V_{PP}$  | Peak pulse voltage                                  | ISO 10605 ( $C = 150\text{ pF}$ , $R = 330\ \Omega$ ) |              | kV          |
|           |                                                     | Contact discharge                                     | 30           |             |
|           |                                                     | Air discharge                                         | 30           |             |
|           |                                                     | ISO 10605, $C = 330\text{ pF}$ , $R = 330\ \Omega$ :  |              |             |
|           |                                                     | Contact discharge                                     | 30           |             |
|           |                                                     | Air discharge                                         | 30           |             |
| PPP       | Peak pulse power dissipation <sup>(1)</sup>         | $T_{j\text{ initial}} = T_{amb}$                      | 400          | W           |
| $T_{stg}$ | Storage temperature range                           |                                                       | -65 to + 150 | $^{\circ}C$ |
| $T_j$     | Operating junction temperature range                |                                                       | -55 to + 150 | $^{\circ}C$ |
| $T_L$     | Maximum lead temperature for soldering during 10 s. |                                                       | 260          | $^{\circ}C$ |

1. For a surge greater than the maximum values, the diode will fail in short-circuit.

**Figure 1. Electrical characteristics - definitions**

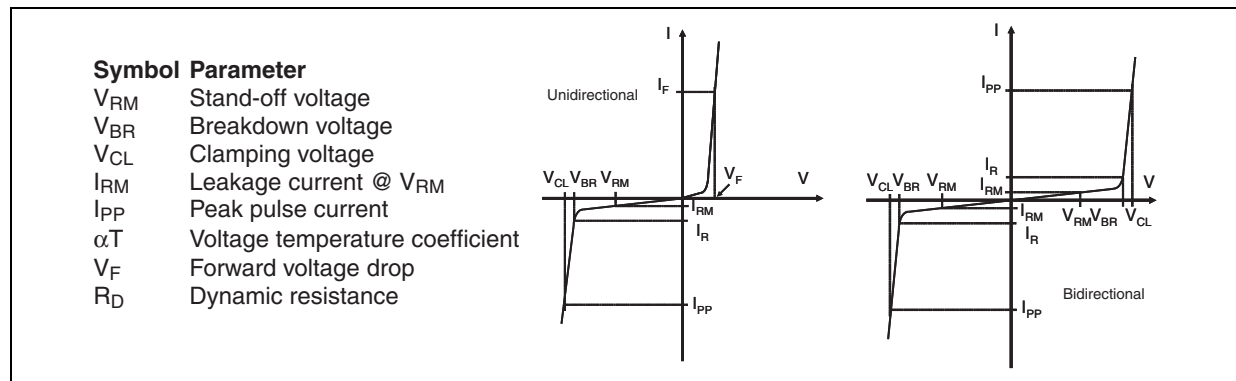

**Figure 2. Pulse definition for electrical characteristics**


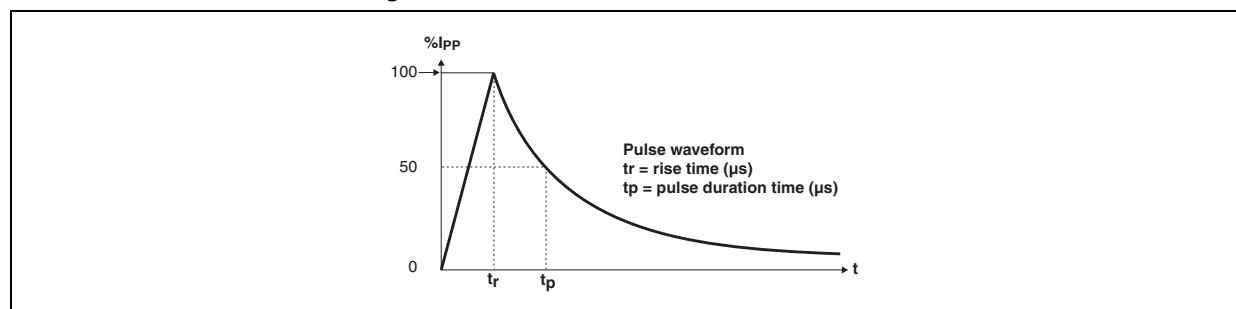


Table 2. Electrical characteristics, typical values if not otherwise stated ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ )


| Order code    | $I_{RM}$ max @ $V_{RM}$ |                       |     | $V_{BR}$ @ $I_R$ <sup>(1)</sup> |      |      |    | $V_{CL}$ @ $I_{PP}$<br>10/1000 $\mu\text{s}$ |                  | $R_D$<br>10/1000 $\mu\text{s}$ | $V_{CL}$ @ $I_{PP}$<br>8/20 $\mu\text{s}$ |                  | $R_D$<br>8/20 $\mu\text{s}$ | $\alpha T$ <sup>(2)</sup>   |
|---------------|-------------------------|-----------------------|-----|---------------------------------|------|------|----|----------------------------------------------|------------------|--------------------------------|-------------------------------------------|------------------|-----------------------------|-----------------------------|
|               | 25 $^{\circ}\text{C}$   | 85 $^{\circ}\text{C}$ |     | min.                            | typ. | max. |    | max.                                         |                  |                                | max.                                      |                  |                             | max                         |
|               | $\mu\text{A}$           |                       | V   | V                               |      |      | mA | V <sup>(3)</sup>                             | A <sup>(4)</sup> | $\Omega$                       | V <sup>(3)</sup>                          | A <sup>(4)</sup> | $\Omega$                    | 10-4/<br>$^{\circ}\text{C}$ |
| SM4T6V7AY/CAY | 20                      | 50                    | 5   | 6.4                             | 6.74 | 7.1  | 10 | 9.2                                          | 43.5             | 0.049                          | 13.4                                      | 174              | 0.036                       | 5.7                         |
| SM4T7V6AY/CAY | 20                      | 50                    | 6.5 | 7.2                             | 7.58 | 8.0  | 10 | 11.2                                         | 35.7             | 0.091                          | 14.5                                      | 160              | 0.041                       | 6.1                         |
| SM4T10AY/CAY  | 20                      | 50                    | 8.5 | 9.4                             | 9.9  | 10.4 | 1  | 14.4                                         | 27.7             | 0.145                          | 19.5                                      | 124              | 0.073                       | 7.3                         |
| SM4T12AY/CAY  | 0.2                     | 1                     | 10  | 11.1                            | 11.7 | 12.3 | 1  | 17.0                                         | 23.5             | 0.201                          | 21.7                                      | 106              | 0.089                       | 7.8                         |
| SM4T14AY/CAY  | 0.2                     | 1                     | 12  | 13.3                            | 14.0 | 14.7 | 1  | 19.9                                         | 20.1             | 0.259                          | 25.3                                      | 91               | 0.116                       | 8.3                         |
| SM4T15AY/CAY  | 0.2                     | 1                     | 13  | 14.4                            | 15.2 | 16.0 | 1  | 21.5                                         | 18.6             | 0.298                          | 27.2                                      | 85               | 0.132                       | 8.4                         |
| SM4T18AY/CAY  | 0.2                     | 1                     | 15  | 16.7                            | 17.6 | 18.5 | 1  | 24.4                                         | 16.4             | 0.361                          | 32.5                                      | 71               | 0.197                       | 8.8                         |
| SM4T21AY/CAY  | 0.2                     | 1                     | 18  | 20.0                            | 21.1 | 22.2 | 1  | 29.2                                         | 13.7             | 0.514                          | 39.3                                      | 59               | 0.291                       | 9.2                         |
| SM4T23AY/CAY  | 0.2                     | 1                     | 20  | 22.2                            | 23.4 | 24.6 | 1  | 32.4                                         | 12.3             | 0.637                          | 42.8                                      | 54               | 0.338                       | 9.4                         |
| SM4T26AY/CAY  | 0.2                     | 1                     | 22  | 24.4                            | 25.7 | 27.0 | 1  | 35.5                                         | 11.2             | 0.760                          | 48.3                                      | 48               | 0.444                       | 9.6                         |
| SM4T28AY/CAY  | 0.2                     | 1                     | 24  | 26.7                            | 28.1 | 29.5 | 1  | 38.9                                         | 10.3             | 0.912                          | 50                                        | 46               | 0.446                       | 9.6                         |
| SM4T30AY/CAY  | 0.2                     | 1                     | 26  | 28.9                            | 30.4 | 31.9 | 1  | 42.1                                         | 9.5              | 1.07                           | 53.5                                      | 43               | 0.502                       | 9.7                         |
| SM4T33AY/CAY  | 0.2                     | 1                     | 28  | 31.1                            | 32.7 | 34.3 | 1  | 45.4                                         | 8.8              | 1.26                           | 59                                        | 39               | 0.632                       | 9.8                         |
| SM4T35AY/CAY  | 0.2                     | 1                     | 30  | 33.3                            | 35.1 | 36.9 | 1  | 48.4                                         | 8.3              | 1.39                           | 64.3                                      | 36               | 0.762                       | 9.9                         |
| SM4T39AY/CAY  | 0.2                     | 1                     | 33  | 36.7                            | 38.6 | 40.5 | 1  | 53.3                                         | 7.5              | 1.70                           | 69.7                                      | 33               | 0.884                       | 10                          |
| SM4T47AY/CAY  | 0.2                     | 1                     | 40  | 44.4                            | 46.7 | 49.0 | 1  | 64.5                                         | 6.2              | 2.49                           | 84                                        | 27               | 1.30                        | 10.1                        |
| SM4T50AY/CAY  | 0.2                     | 1                     | 43  | 47.8                            | 50.3 | 52.8 | 1  | 69.4                                         | 5.7              | 2.91                           | 91                                        | 25               | 1.53                        | 10.2                        |
| SM4T56AY/CAY  | 0.2                     | 1                     | 48  | 53.3                            | 56.1 | 58.9 | 1  | 77.4                                         | 5.2              | 3.56                           | 100                                       | 23               | 1.79                        | 10.3                        |
| SM4T68AY/CAY  | 0.2                     | 1                     | 58  | 64.4                            | 67.8 | 71.2 | 1  | 93.6                                         | 4.3              | 5.21                           | 121                                       | 19               | 2.62                        | 10.4                        |
| SM4T82AY/CAY  | 0.2                     | 1                     | 70  | 77.8                            | 81.9 | 86.0 | 1  | 113                                          | 3.5              | 7.72                           | 146                                       | 16               | 3.75                        | 10.5                        |

- Pulse test:  $t_p < 50\text{ ms}$
- To calculate maximum clamping voltage at other surge level, use the following formula:  $V_{CL\text{ max}} = V_{CL} - R_D \times (I_{PP} - I_{PP\text{ appli}})$   
where  $I_{PP\text{ appli}}$  is the surge current in the application
- To calculate  $V_{BR}$  or  $V_{CL}$  versus junction temperature, use the following formulas:  
 $V_{BR} @ T_J = V_{BR} @ 25^{\circ}\text{C} \times (1 + \alpha T \times (T_J - 25))$   
 $V_{CL} @ T_J = V_{CL} @ 25^{\circ}\text{C} \times (1 + \alpha T \times (T_J - 25))$
- Surge capability given for both directions for unidirectional and bidirectional types.


**Figure 3. Peak pulse power dissipation versus initial junction temperature**

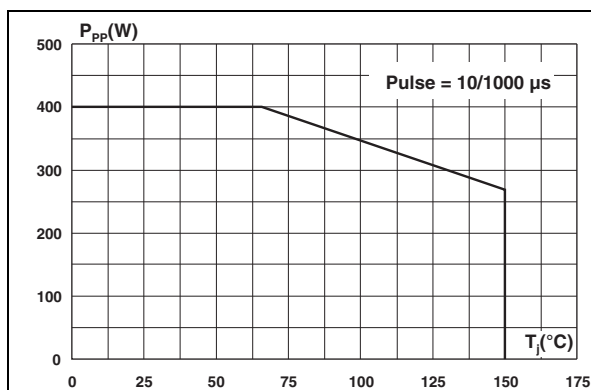


**Figure 4. Peak pulse power versus exponential pulse duration ( $T_J$  initial = 25 °C)**

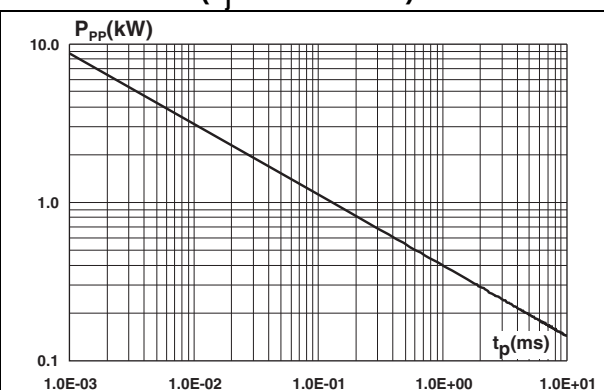


**Figure 5. Clamping voltage versus peak pulse current (exponential waveform, maximum values)**

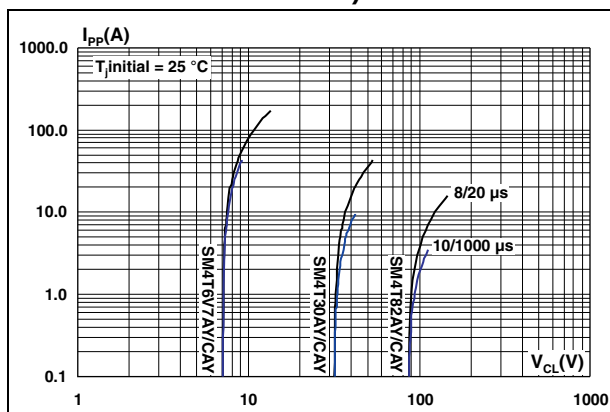


**Figure 6. Junction capacitance versus reverse applied voltage for unidirectional types (typical values)**

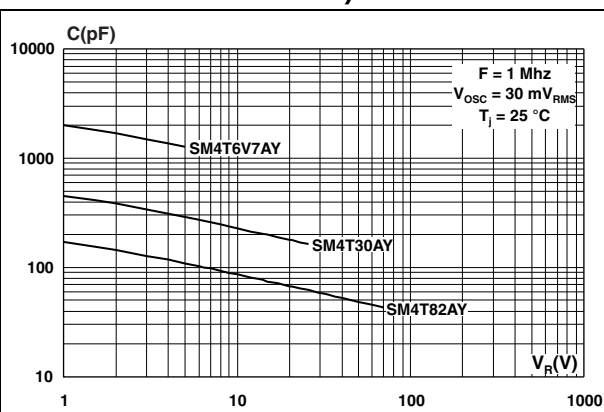


**Figure 7. Junction capacitance versus reverse applied voltage for bidirectional types (typical values)**

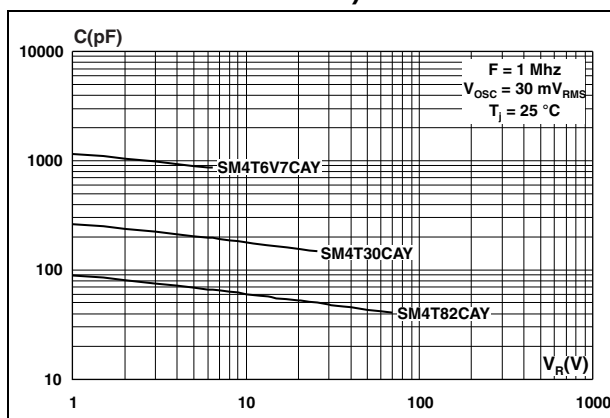


**Figure 8. Relative variation of thermal impedance, junction to ambient, versus pulse duration**

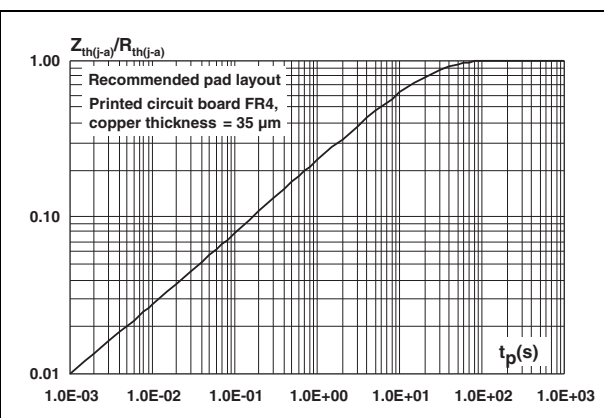

**Figure 9. Thermal resistance junction to ambient versus copper surface under each lead**

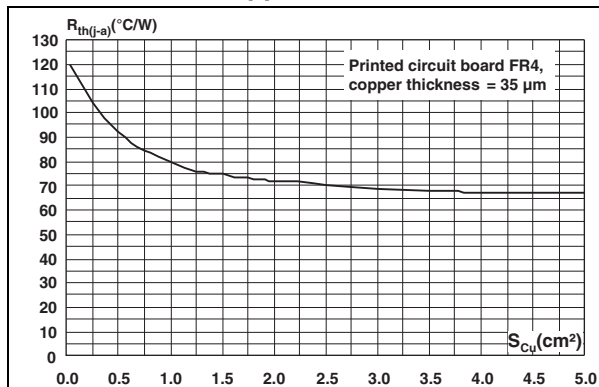

**Figure 10. Leakage current versus junction temperature (typical values)**

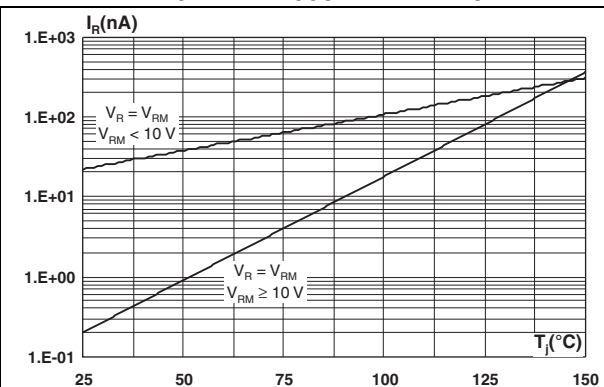

**Figure 11. Peak forward voltage drop versus peak forward current (typical values)**

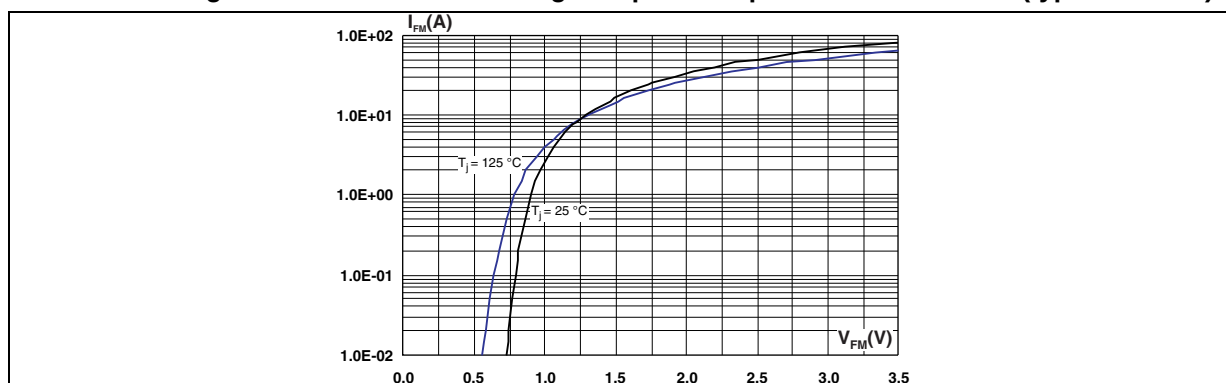


Figure 12. ISO7637-2 pulse 1 response ( $V_S = -100\text{ V}$ )

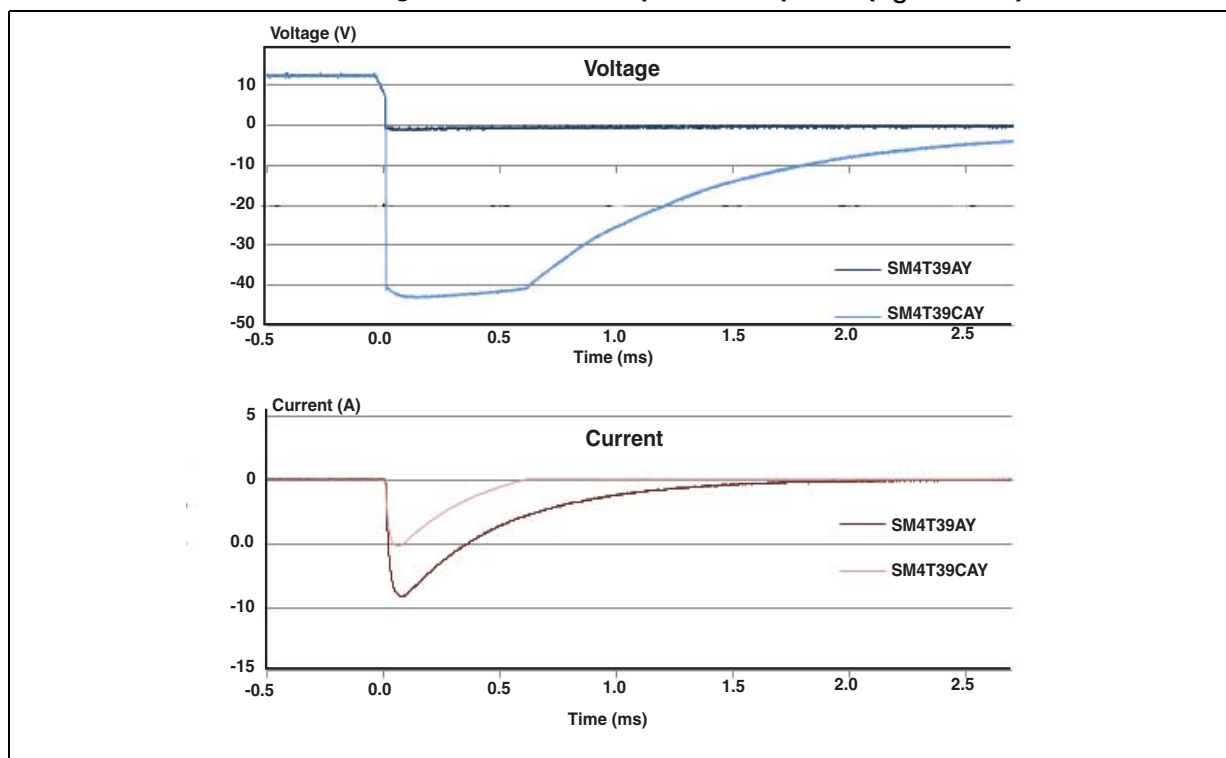


Figure 13. ISO7637-2 pulse 2a response ( $V_S = 50\text{ V}$ )

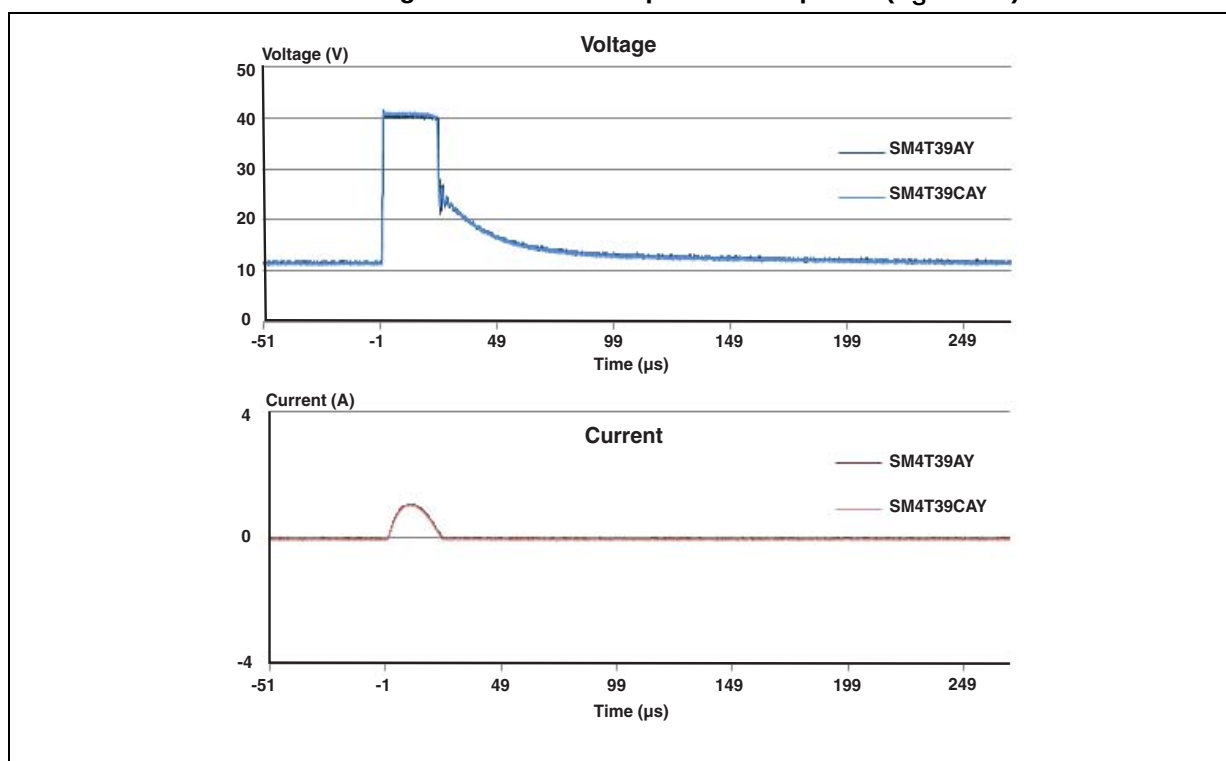


Figure 14. ISO7637-2 pulse 3a response ( $V_S = -150\text{ V}$ )


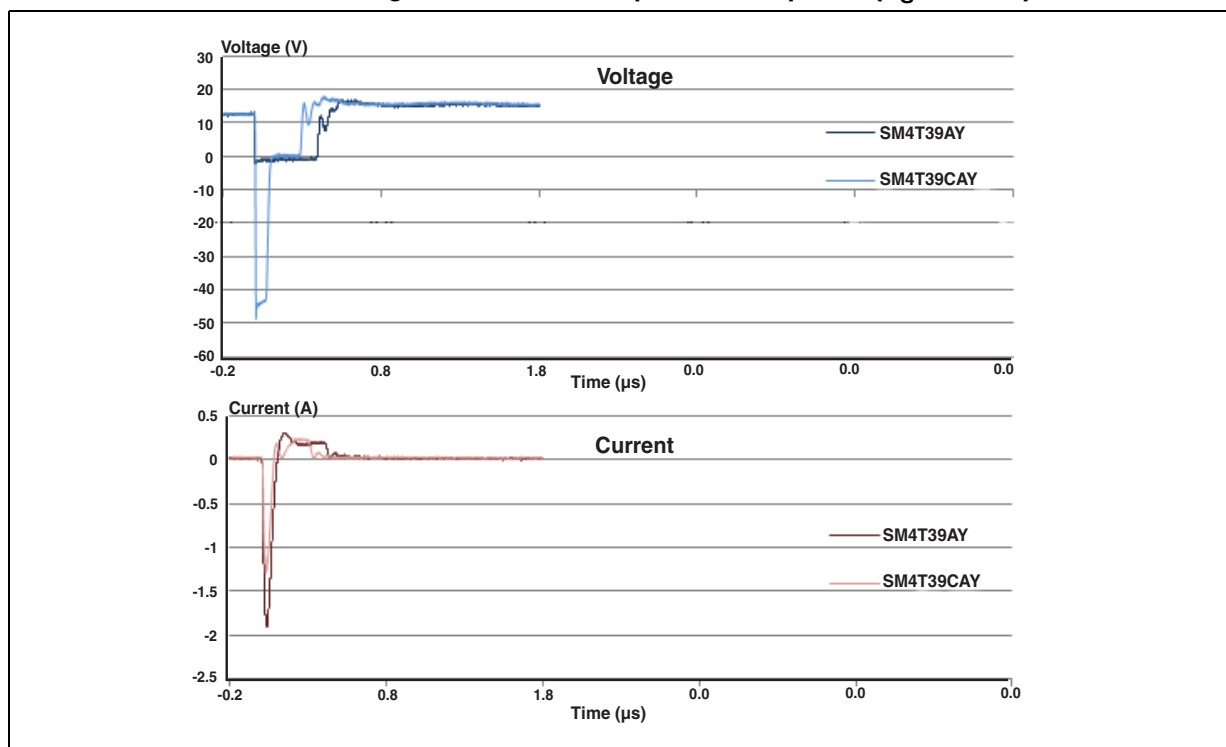


Figure 15. ISO7637-2 pulse 3b response ( $V_S = 100\text{ V}$ )

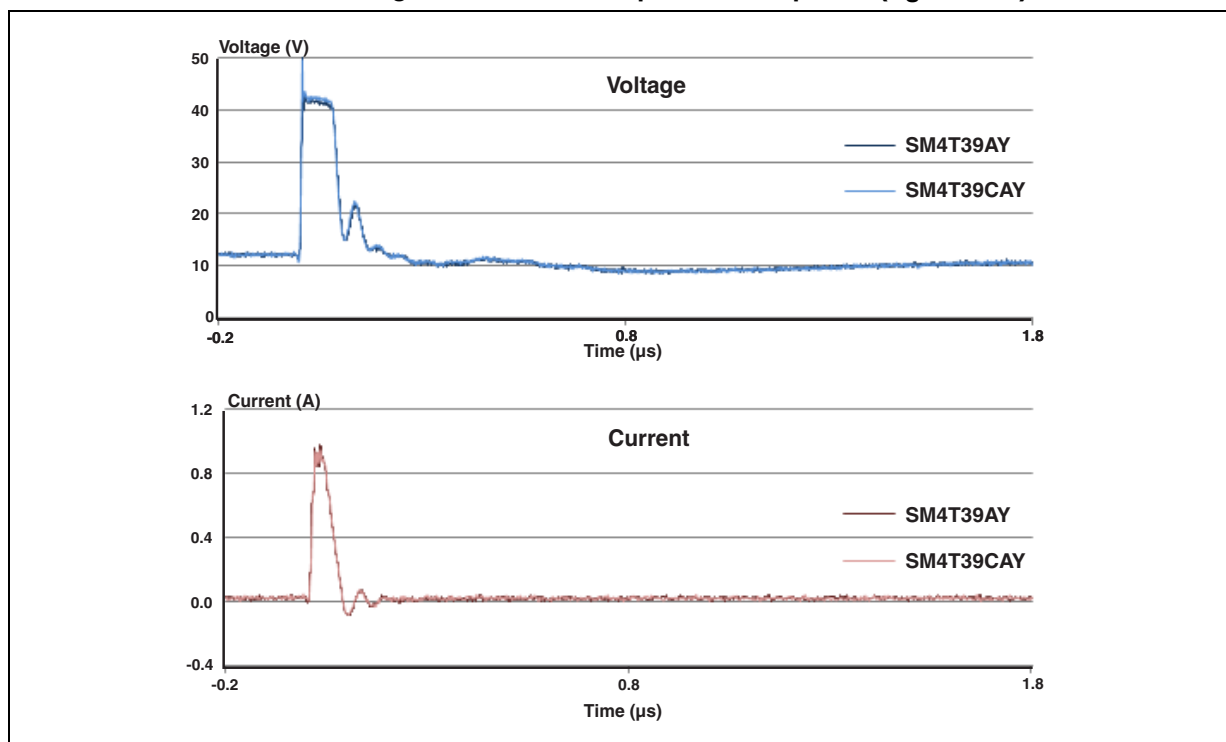


Note: ISO7637-2 pulses responses are not applicable for product with a stand off voltage lower than the average battery voltage (13.5 V).

## 2 Application and design guidelines

More information is available in the Application note AN2689 "Protection of automotive electronics from electrical hazards, guidelines for design and component selection".

## 3 Ordering information scheme

Figure 16. Ordering information scheme

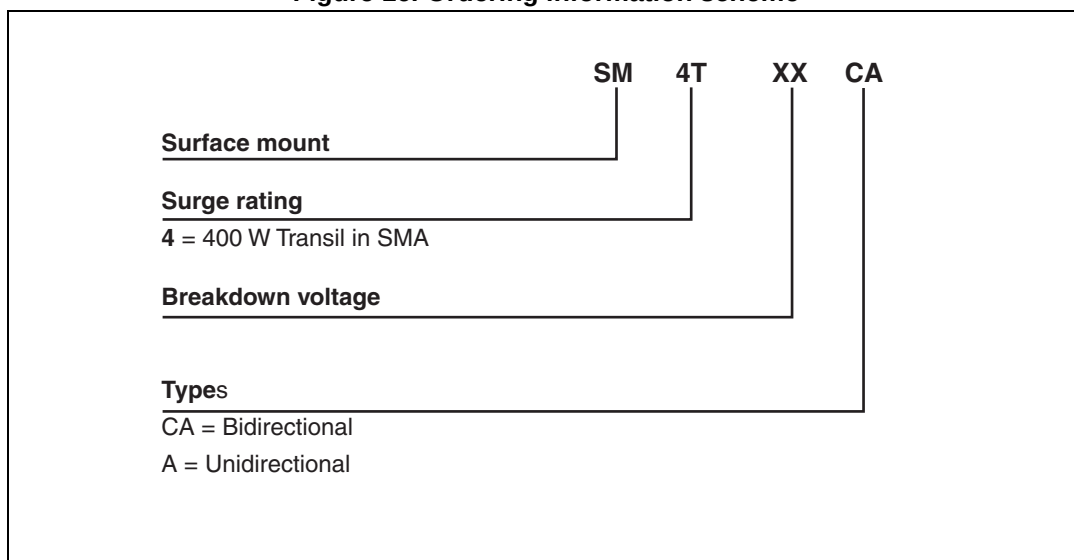




## 4 Package information

- Case: JEDEC DO-214AB molded plastic over planar junction
- Terminals: solder plated, solderable as per MIL-STD-750, Method 2026
- Polarity: for unidirectional types the band indicates cathode
- Flammability: epoxy is rated UL 94, V0
- RoHS package


**Table 3. SMA package dimensions**

| Ref. | Dimensions  |      |        |       |
|------|-------------|------|--------|-------|
|      | Millimeters |      | Inches |       |
|      | Min.        | Max. | Min.   | Max.  |
| A1   | 1.90        | 2.45 | 0.075  | 0.094 |
| A2   | 0.05        | 0.20 | 0.002  | 0.008 |
| b    | 1.25        | 1.65 | 0.049  | 0.065 |
| c    | 0.15        | 0.40 | 0.006  | 0.016 |
| D    | 2.25        | 2.90 | 0.089  | 0.114 |
| E    | 4.80        | 5.35 | 0.189  | 0.211 |
| E1   | 3.95        | 4.60 | 0.156  | 0.181 |
| L    | 0.75        | 1.50 | 0.030  | 0.059 |

**Figure 17. SMA footprint dimensions in mm (inches)**

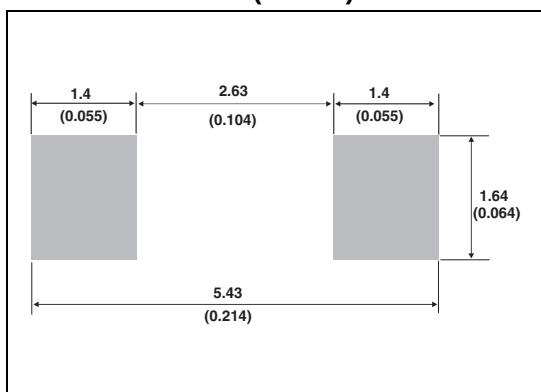

**Figure 18. Marking layout<sup>(1)</sup>**

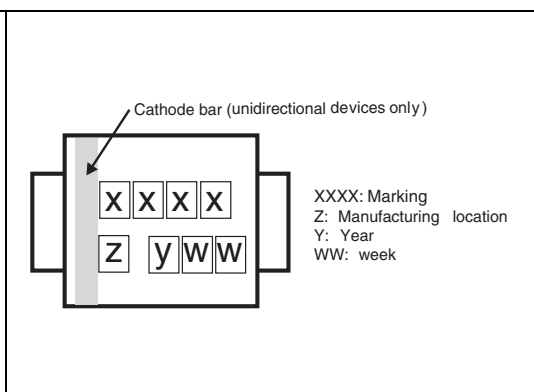

1. Marking layout can vary according to assembly location.

**Table 4. Marking**

| Order code | Marking | Order code | Marking |
|------------|---------|------------|---------|
| SM4T6V7A   | AEY     | SM4T6V7CA  | AAY     |
| SM4T7V6A   | DUCY    | SM4T7V5CA  | DBCY    |
| SM4T10A    | DUHY    | SM4T10CA   | DBHY    |
| SM4T12A    | AXY     | SM4T12CA   | ACY     |
| SM4T14A    | DUKY    | SM4T14CA   | DBKY    |
| SM4T15A    | BGY     | SM4T15CA   | BHY     |
| SM4T18A    | BMY     | SM4T18CA   | AJY     |
| SM4T21A    | DUQY    | SM4T21CA   | DBQY    |
| SM4T23A    | DURY    | SM4T23CA   | DBRY    |
| SM4T26A    | DUSY    | SM4T26CA   | DBSY    |
| SM4T28A    | DUTY    | SM4T28CA   | DBTY    |
| SM4T30A    | DUUY    | SM4T30CA   | DBUY    |
| SM4T33A    | CGY     | SM4T33CA   | CHY     |
| SM4T35A    | CKY     | SM4T35CA   | CLY     |
| SM4T39A    | CMY     | SM4T39CA   | CNY     |
| SM4T47A    | DUZY    | SM4T47CA   | DBZY    |
| SM4T50A    | EUAY    | SM4T50CA   | EBAY    |
| SM4T56A    | CXY     | SM4T56CA   | CYY     |
| SM4T68A    | EUFY    | SM4T68CA   | EBFY    |
| SM4T82A    | EUIY    | SM4T82CA   | EBIY    |