
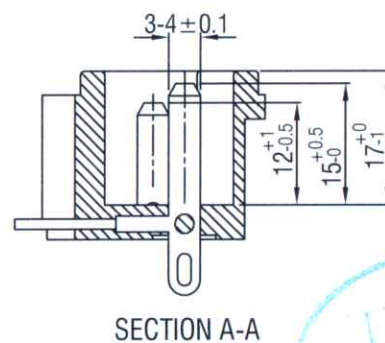
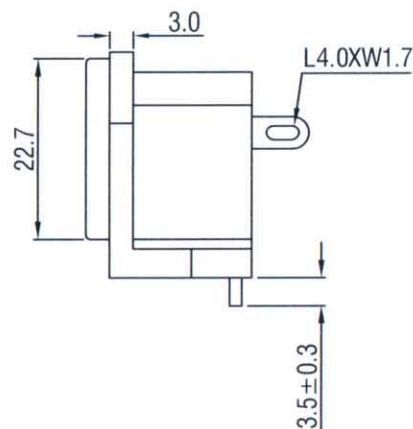
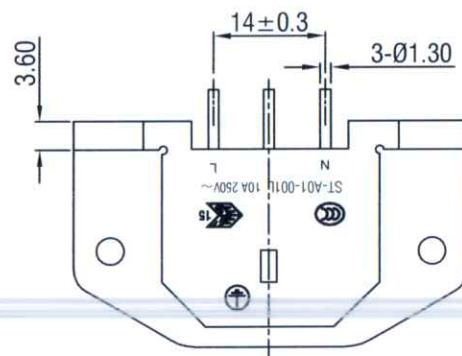
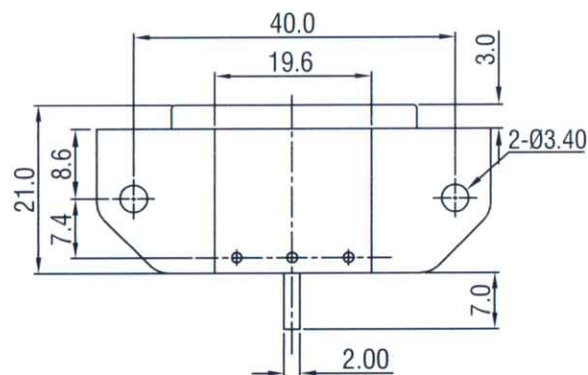


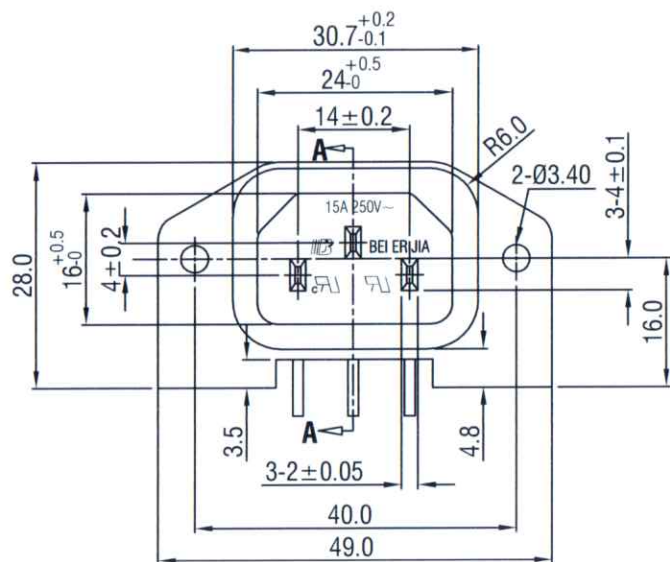

SPEC:

A. Material:



1. Housing: PBT
2. Terminal: COPPER ALLOY, TIN PLATED

B. Electrical Characteristics:

1. Rating: 15A 250V~ (UL,CUL)
10A 250V~ (CCC,ENEC)
2. Electric Strength: AC 2,000 V FOR ONE MINUTE
3. Insulation Resistance: 100MΩ MIN, AT 500V DC

C. Approvals:

UL, CUL, CCC, ENEC

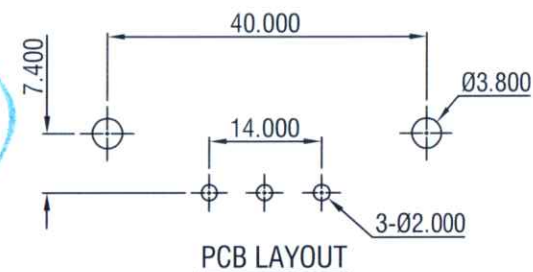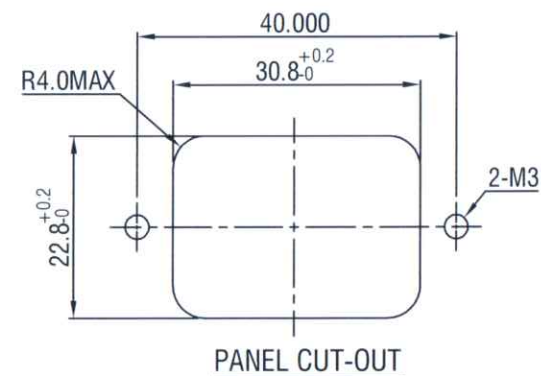

V1.4	2023.03.07	Change the safety mark.	-----
V1.3	2019.12.05	Change CCC safety mark	ECN19040
V1.2	2015.12.08	Change the size	ECN15049
V1.1	2014.08.16	Change The Tolerance	ECN14025
V1.0	2014.07.04	New Revision	-----
REV	DATE	DESCRIPTION	ECN NO.

			Name:
			AC INLET 3PIN SOCKET
Drawing For Customer			Model No.:
			ST-A01-001L
DESIGNER CHECKED APPROVED			Part No.:
			ST-A01-001L-5
Sky Shirley Toby			File No.:
			BEJ-E-EK-A01-0191

Common Tolerance
DIMENSION: 0.0 ±0.3 ±3°
ANGLE: 0.00 ±0.20 0.000 ±0.100
VIEW:
UNIT: mm