



TM05P04MI

P-Channel Enhancement Mosfet

General Description

- Low $R_{DS(ON)}$
- RoHS and Halogen-Free Compliant

Applications

- Load switch
- PWM

General Features

$V_{DS} = -40V$ $I_D = -5.4A$


$R_{DS(ON)} = 45m\Omega (typ.) @ V_{GS} = -10V$

100% UIS Tested



100% R_g Tested



MI:SOT-23-3L



Marking: 5P04



Absolute Maximum Ratings ($T_C = 25^\circ C$ unless otherwise noted)

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	-40	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D @ T_A = 25^\circ C$	Continuous Drain Current	-5.4	A
$I_D @ T_A = 70^\circ C$	Continuous Drain Current	-3.5	A
I_{DM}	Pulsed Drain Current ²	-20	A
$P_D @ T_A = 25^\circ C$	Total Power Dissipation ³	2.0	W
$P_D @ T_A = 70^\circ C$	Total Power Dissipation ³	1.5	W
T_{STG}	Storage Temperature Range	-55 to 175	$^\circ C$
T_J	Operating Junction Temperature Range	-55 to 175	$^\circ C$

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient ¹	---	65	$^\circ C/W$
$R_{\theta JA}$	Thermal Resistance Junction-Ambient ¹ ($t \leq 10s$)	---	48	$^\circ C/W$

TM05P04MI
P-Channel Enhancement Mosfet
Electrical Characteristics ($T_J=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
Off Characteristic						
V _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D = -250μA	-40	-	-	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = -40V, V _{GS} =0V	-	-	-1	μA
I _{GSS}	Gate to Body Leakage Current	V _{DS} =0V, V _{GS} = ±20V	-	-	±100	nA
On Characteristics						
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D = -250μA	-1.4	-1.75	-2.0	V
R _{DS(on)}	Static Drain-Source on-Resistance Note2	V _{GS} = -10V, I _D = -5A	-	45	54	mΩ
		V _{GS} = -4.5V, I _D = -4A	-	55	68	
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{DS} = -20V, V _{GS} =0V, f=1.0MHz	-	899	-	pF
C _{oss}	Output Capacitance		-	94	-	pF
C _{rss}	Reverse Transfer Capacitance		-	69	-	pF
Q _g	Total Gate Charge	V _{DS} = -20V, I _D = -4A, V _{GS} = -10V	-	17.3	-	nC
Q _{gs}	Gate-Source Charge		-	3.2	-	nC
Q _{gd}	Gate-Drain(“Miller”) Charge		-	4.3	-	nC
Switching Characteristics						
t _{d(on)}	Turn-on Delay Time	V _{DS} = -20V, I _D = -4A, V _{GS} = -10V, R _{GEN} =3Ω	-	10.3	-	ns
t _r	Turn-on Rise Time		-	4.3	-	ns
t _{d(off)}	Turn-off Delay Time		-	39	-	ns
t _f	Turn-off Fall Time		-	46.5	-	ns
Drain-Source Diode Characteristics and Maximum Ratings						
I _S	Maximum Continuous Drain to Source Diode Forward Current		-	-	-5.4	A
I _{SM}	Maximum Pulsed Drain to Source Diode Forward Current		-	-	-22	A
V _{SD}	Drain to Source Diode Forward Voltage	V _{GS} =0V, I _S = -5.5A	-	-0.8	-1.2	V
t _{rr}	Reverse Recovery Time	V _{GS} =0V, I _S = -5.5A,	-	17	-	ns
Q _{rr}	Reverse Recovery Charge	di/dt=100A/μs	-	11.5	-	nC

Notes:1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature

 2. Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$



TM05P04MI

P-Channel Enhancement Mosfet

Typical Performance Characteristics

Figure1: Output Characteristics

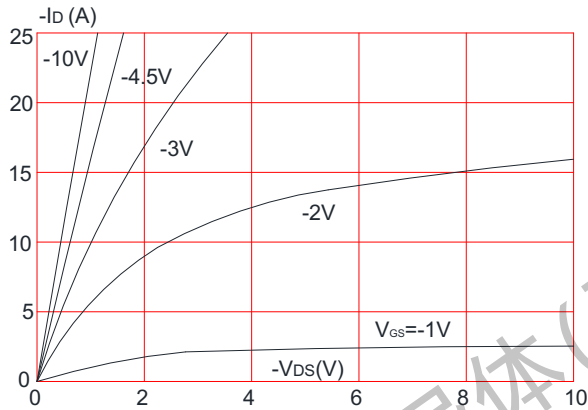


Figure 2: Typical Transfer Characteristics

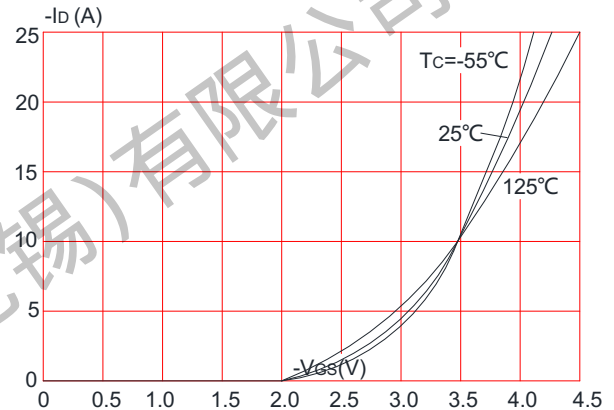


Figure 3: On-resistance vs. Drain Current

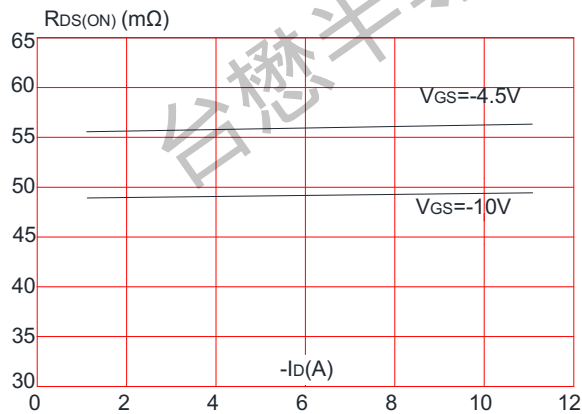


Figure 4: Body Diode Characteristics

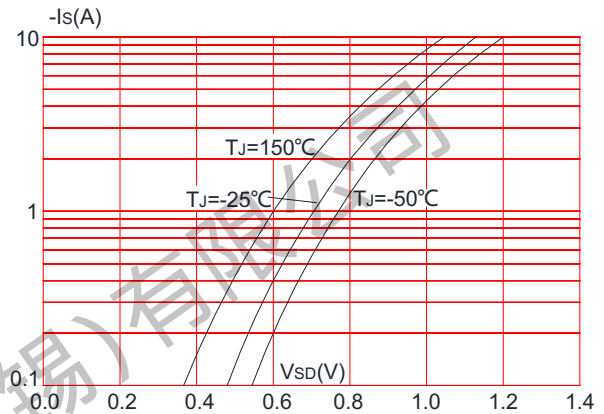


Figure 5: Gate Charge Characteristics


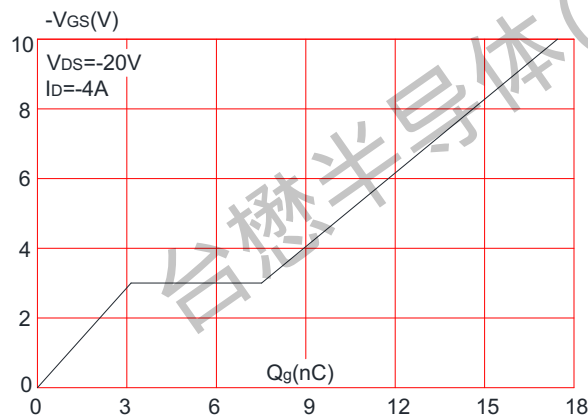


Figure 6: Capacitance Characteristics

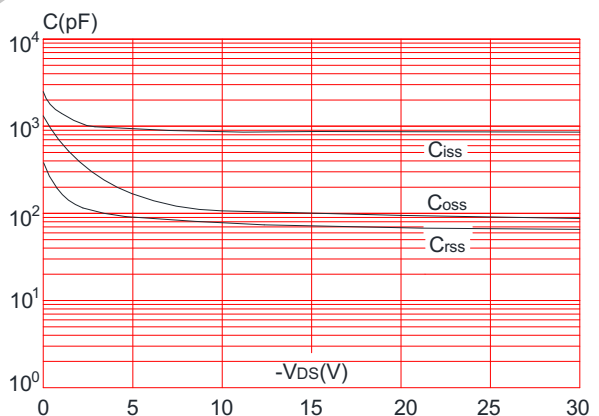

TM05P04MI

P-Channel Enhancement Mosfet

Figure 7: Normalized Breakdown Voltage vs. Junction Temperature

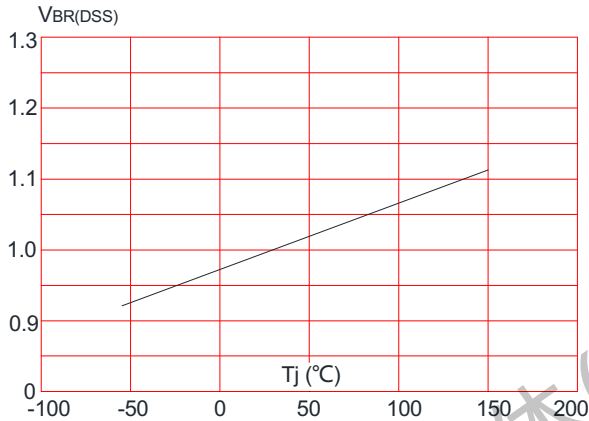


Figure 8: Normalized on Resistance vs. Junction Temperature

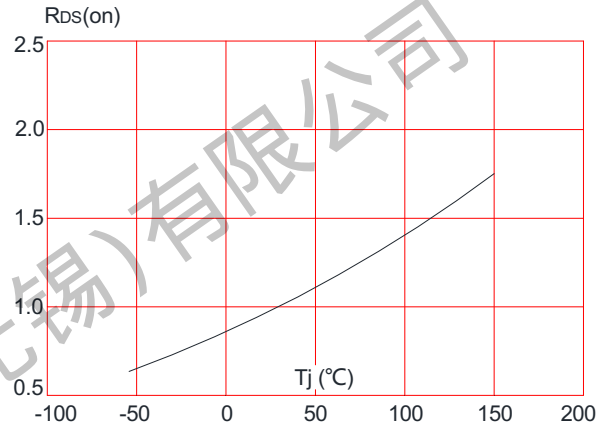


Figure 9: Maximum Safe Operating Area

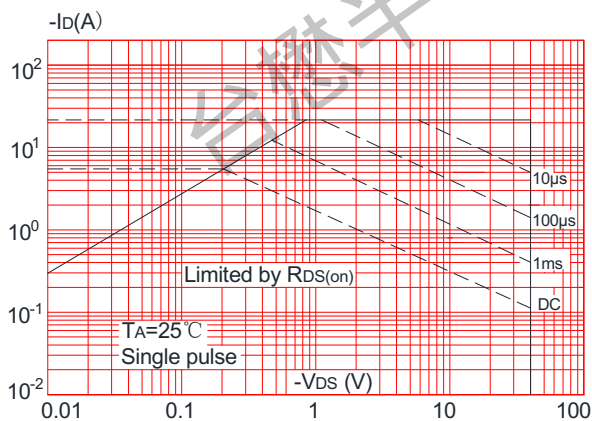


Figure 10: Maximum Continuous Drain Current vs. Ambient Temperature


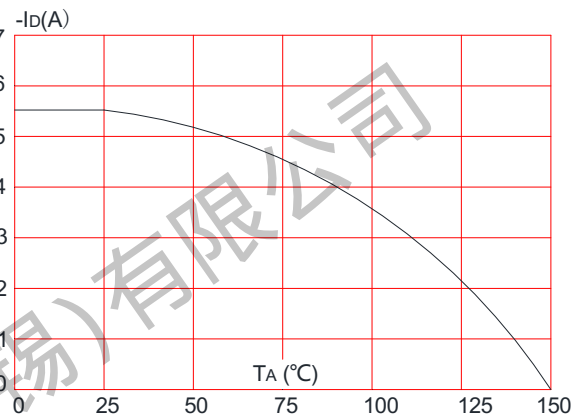


Figure.11: Maximum Effective Transient Thermal Impedance, Junction-to-Ambient




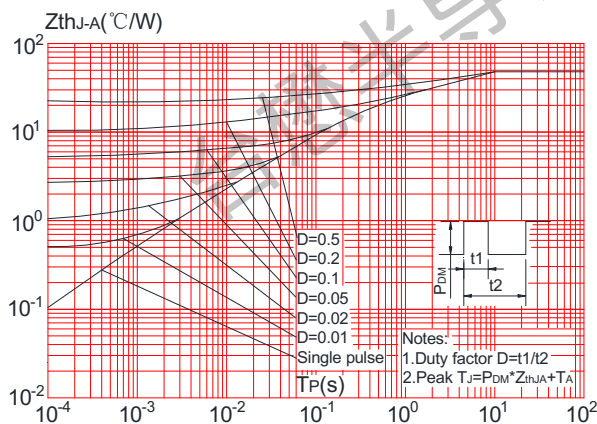

TM05P04MI

P-Channel Enhancement Mosfet

Package Mechanical Data:SOT-23-3L

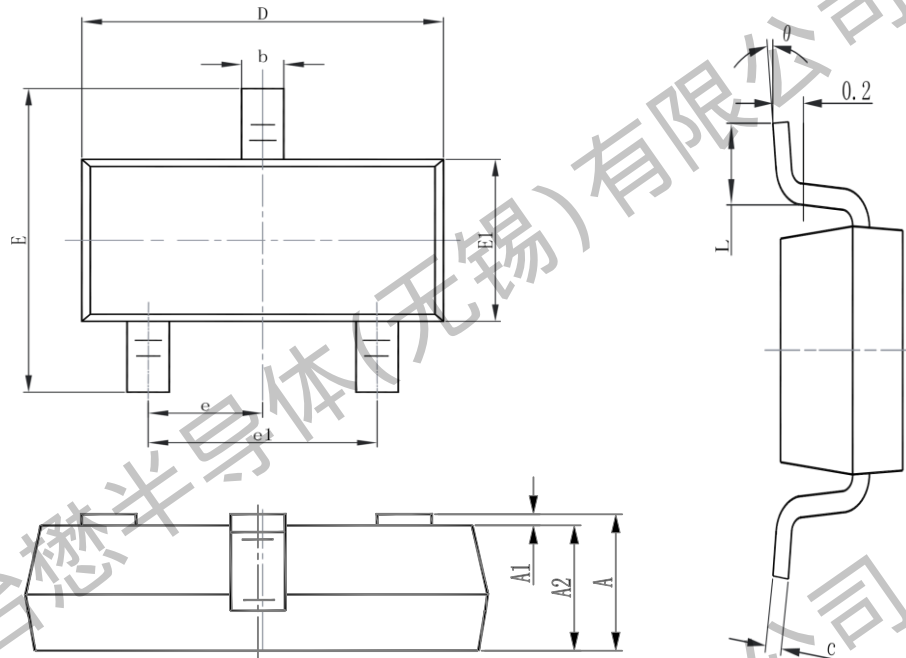

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E1	1.500	1.700	0.059	0.067
E	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°




TM05P04MI


P-Channel Enhancement Mosfet

SOT-23-3L Packing

1. The method of packaging and dimension are shown as below figure. (Dimension in mm)

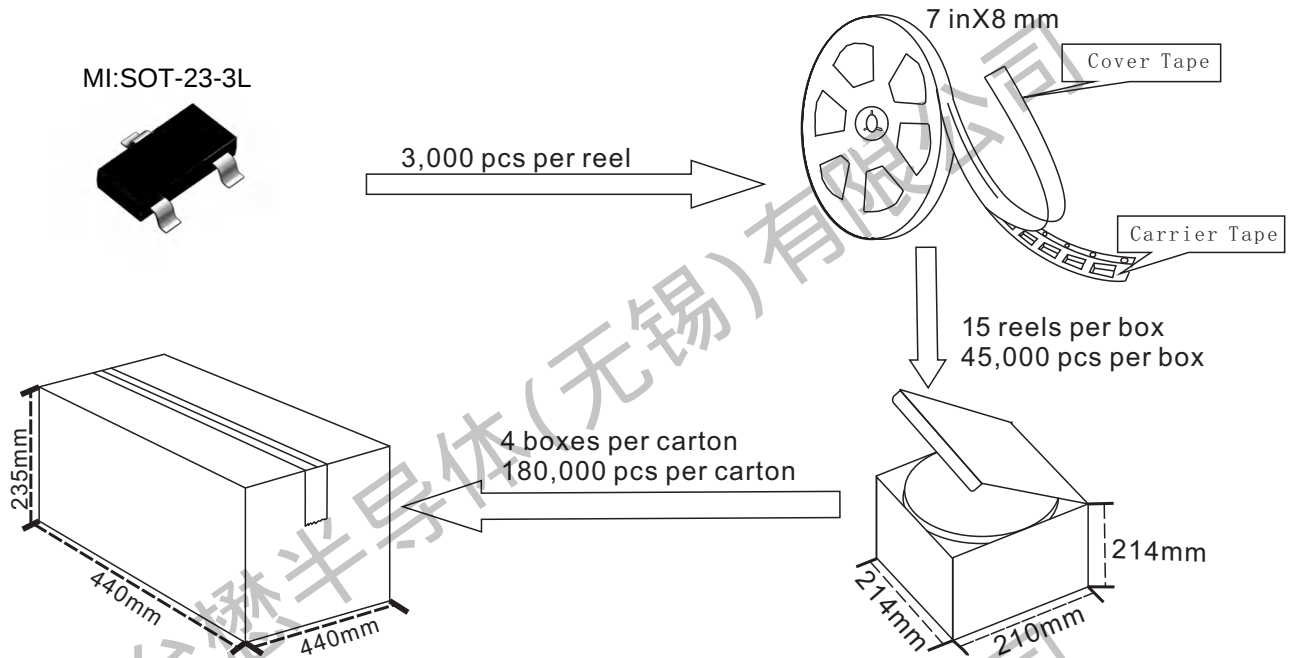


SOT-23-3L Embossed Carrier Tape

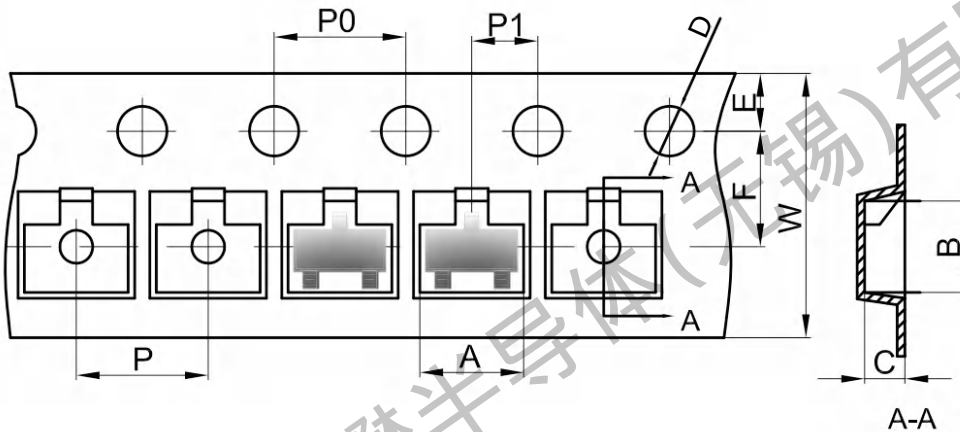

Dimensions are in millimeter

Pkg type	A	B	C	D	E	F	P0	P	P1	W
SOT-23-3L	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23-3L Tape Leader and Trailer

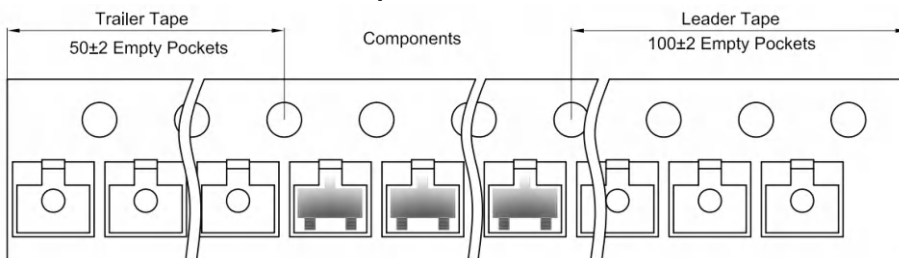

Important Notices and Disclaimers

- Tritech-MOS Technology Corp. reserves the right to change this document, its products, and specifications at any time without prior notice.
- Before final design, purchase, or use, customers should obtain and confirm the latest product information and specifications.
- Tritech-MOS Technology Corp. makes no warranties, representations or warranties regarding the suitability of its products for any specific purpose, and Tritech-MOS Technology Corp. does not assume any responsibility for application assistance or customer product design.
- Tritech-MOS Technology Corp. does not guarantee or assume any responsibility for the purchase or use of any unexpected or unauthorized products.
- Any intellectual property rights of Tritech-MOS Technology Corp. are not licensed through implicate or other means.
- Products of Tritech-MOS Technology Corp. are not included as critical components in life support equipment or systems without explicit written approval from Tritech-MOS Technology Corp.

Revision history:

Date	Rev	Description	Page
2023.04.19	23.04	Original	