


SAW Filter, Series FSF-5050

SMD SAW 5.0×5.0 mm

FEATURE



- Small size 5.0×5.0×1.5mm
- Welding can be done with automatic mounting
- Low-loss SAW component
- Low amplitude ripple
- Sharp rejections at both out-bands
- RoHS compatible

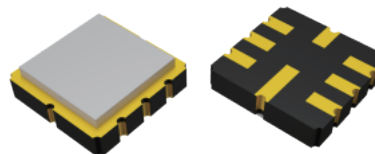

ELECTRICAL SPECIFICATIONS

Item		Specifications	Unit
Frequency Range	f_c	100 ~ 1000MHz	MHz
Standard Frequency	f_c	110, 315, 433.92	MHz
Band Width		2, 3, 5, 10, 20, or specify	MHz
Insertion Loss (min)	IL	1.8, 2.2, 3.0, 6.5, or specify	dB
Operating Temperature Range		-40 ~ +85	°C
Storage Temperature Range		-55 ~ +125	°C

DIMENSION (mm)

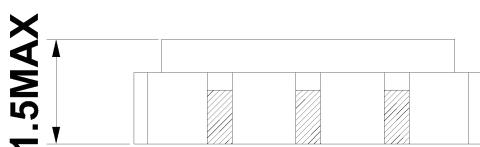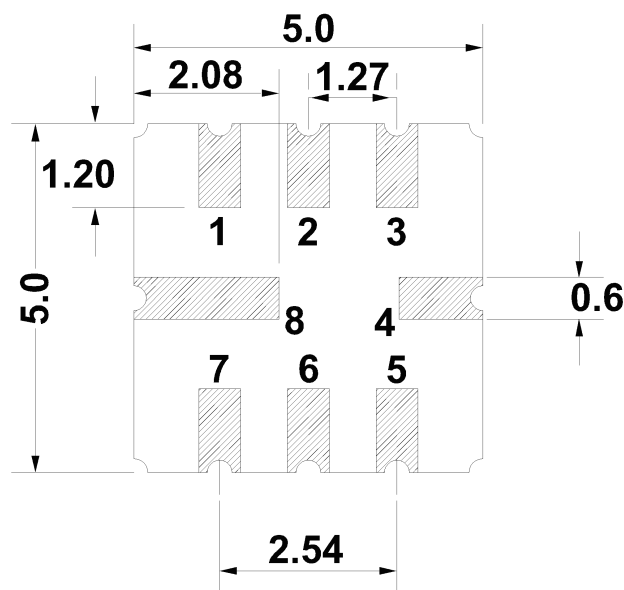

Pin No.	Description
2	Input/Output
6	Output/Input
1, 3, 5, 7	To be grounded
4, 8	Case Ground