
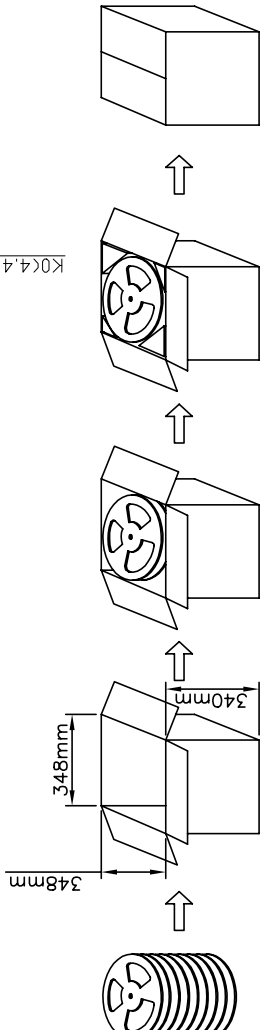
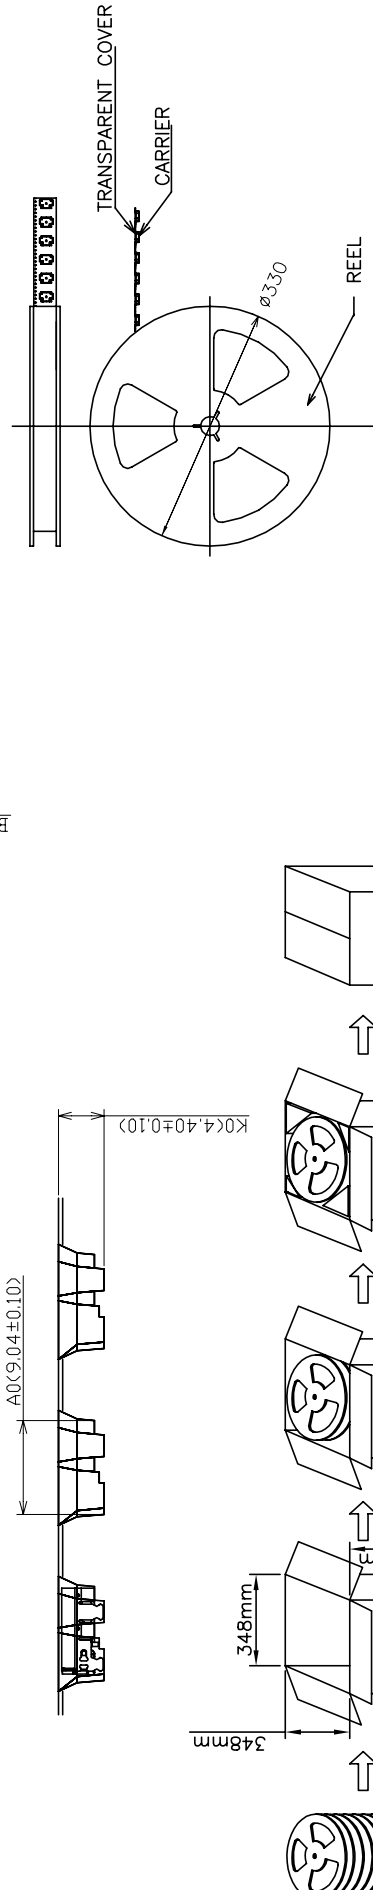
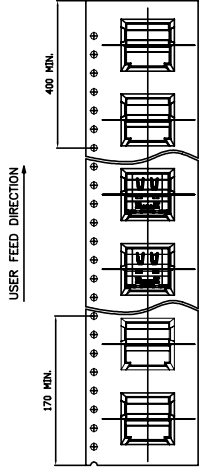


© 2021	TE Connectivity. All Rights Reserved.				REVISIONS		1	
	P LTR		DESCRIPTION		DATE		DWN APVD	
	-		SEE SHEET 1		-		-	

- NOTES:
1. USED ON USB TYPE C CONNECTOR PRODUCTS.
 2. PACKAGE:800PCS/REEL, 10REELS/BOX
 3. MATERIAL:TRANSPARENT CONDUCTIVE POLYSTYRENE ALLOY
 4. APPLICABLE DOCUMENTS:EIA-481-D
 5. AFTER UNREELING DIRECTION MUST HAVE 11 PCS BLANK.(170mm Min)
 6. BEFORE UNREELING DIRECTION MUST HAVE 25 PCS BLANK.(400mm Min)

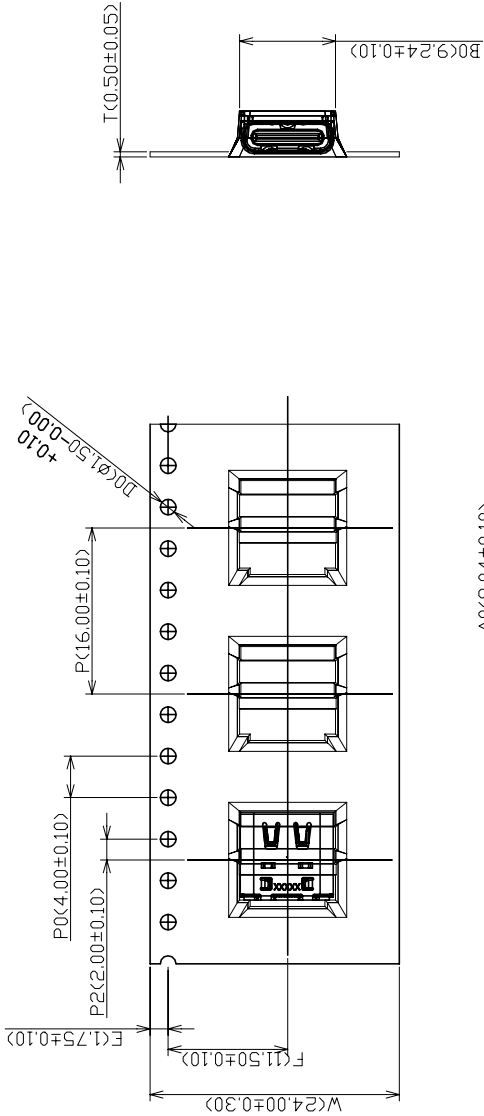

PACKAGING PROCESS

THIS PRINT IS
PRELIMINARY
UNQUALIFIED PRODUCT
DESIGN IS SUBJECT TO
CHANGE WITHOUT NOTICE

THIS DRAWING IS A CONTROLLED DOCUMENT.				TE Connectivity			
DWN	RICHARD	MA	15APR2021	CHK	RICHARD	MA	15APR2021
APVD	SUNY ZHAO	PRODUCT SPEC	108-160251	NAME	USB 4.0 RECEPTACLE TOP MOUNT, 24 POS, CH=1.60		
APPLICATION SPEC			—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
WEIGHT			—	A3	00779	C=2385692	—
CUSTOMER DRAWING				SCALE	1:1	SHEET	3 of 3
						REV	1