

**LCD&LCM**  
**SPECIFICATION**  
**液晶显示屏产品使用说明书**

**MODULE NO.**

**T12864C065C**

**128x64 图形点阵**  
**2.6" 单色 , COG 工艺**  
**SPI 串口通讯 , FPC 插接**

|          |         |          |
|----------|---------|----------|
| Designed | Checked | Approved |
|          |         |          |

## 申 明

本产品属我司公模产品，我司保留对此文件及产品进行修改升级的权利且不另行通知，请于向我公司提出订单前，自行确定所使用的相关技术文件及产品规格为最新版本。规格书中之相关内容相信是正确的，但并不保证绝无错误，欢迎提出宝贵建议以便更加完善资料。

若因贵公司使用我公司的文件或产品，而涉及到第三方之专利或版权等相关产权的应用时，则由贵公司负责取得相关授权，我公司不承担由此引起的相关责任。

**Revision history 修改记录**

| revision | date       | description   | remark |
|----------|------------|---------------|--------|
| A00      | 2016-12-05 | First release |        |

## Content/目录

1. **Feature/显示特性**
2. **Mechanical specifications/外形尺寸说明**
3. **Block diagram & power supply/电路原理图**
4. **Pin description/PIN 脚描述**
5. **Absolute maximum rating/限定参数**
6. **Electrical characteristics/电气特性**
7. **Backlight characteristics/背光特性**
8. **Electrical-optical characteristics/光学特性**
9. **Control and display commands/指令描述**
10. **DDRAM 映射表**
11. **Inspection standards/检验标准**
12. **Handling precautions/注意事项**

## 1. Feature/显示特性


|                         |                                                  |
|-------------------------|--------------------------------------------------|
| Display resolution/点阵数  | : 128(w)*64(h)                                   |
| Display mode/显示模式       | : STN ,Positive(or Black-Negative), Transmissive |
| Driving method/驱动方式     | : 1/64 Duty , 1/9 Bias                           |
| Viewing direction/视角    | : 6:00 o'clock                                   |
| Backlight/背光            | : LED , White(or Blue,Other)                     |
| Built-in controller/控制器 | : ST7567                                         |
| Operation temp/工作温度     | : -10℃~60℃                                       |
| Storage temp/储存温度       | : -20℃~70℃                                       |

## 2. Mechanical Specifications/外形尺寸说明


### 2.1 尺寸描述

|                                  |                       |
|----------------------------------|-----------------------|
| Dimensional outline (W*H*T)/外形尺寸 | : 65.0mm*41.0mm*5.1mm |
| Viewing area (W*H)/视域尺寸          | : 61.5mm*31.5mm       |
| Dot pitch (W*H)/点距               | : 0.44mm*0.44mm       |
| Dot size (W*H)/点大小               | : 0.41mm*0.41mm       |
| Weigh/重量 t                       | : Approx              |

### 2.2 Outline Dimension 外形尺寸图

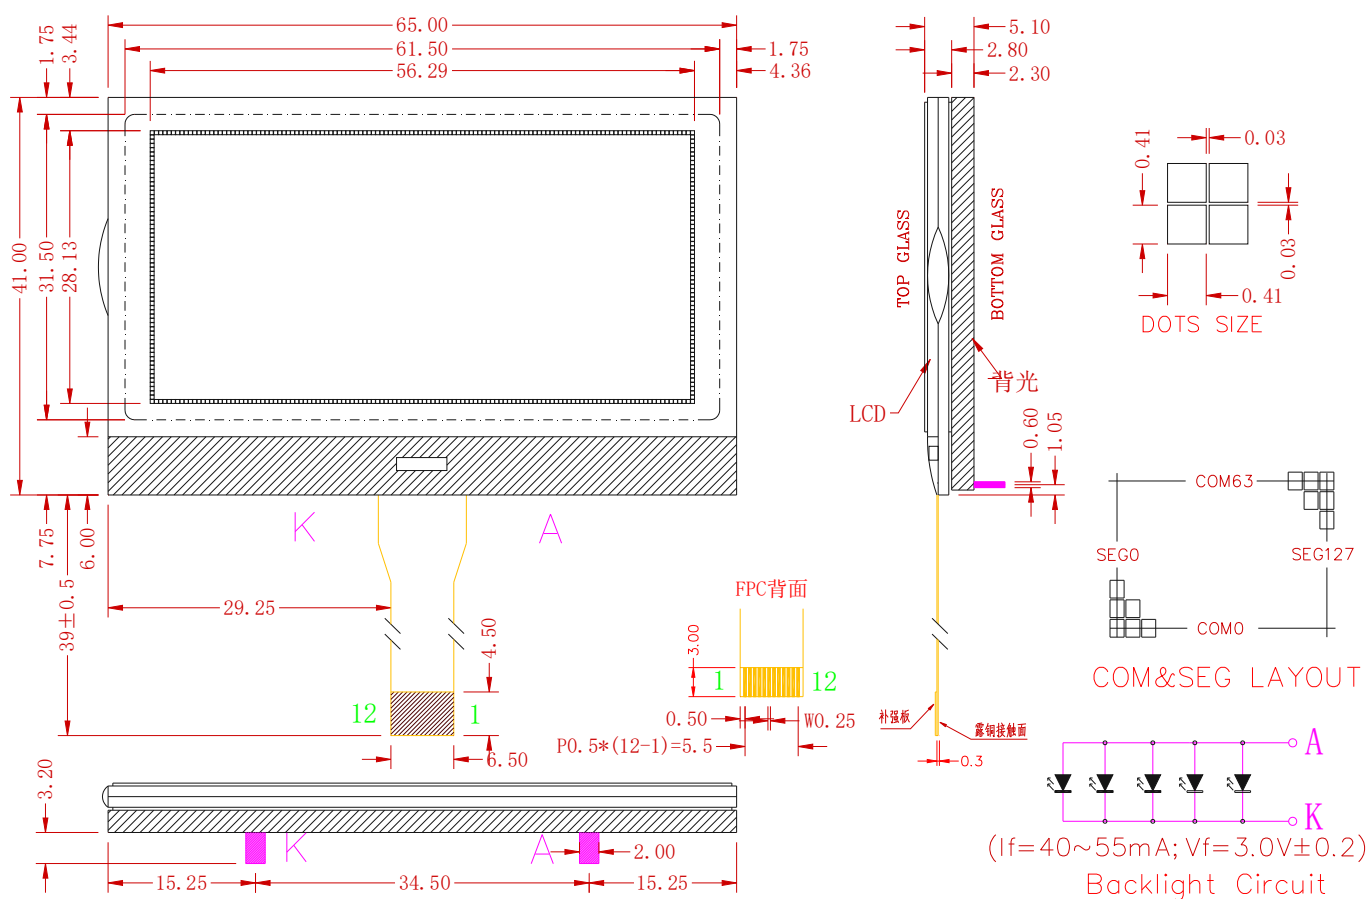

## 2. Block Diagram & Power supply/电路原理图

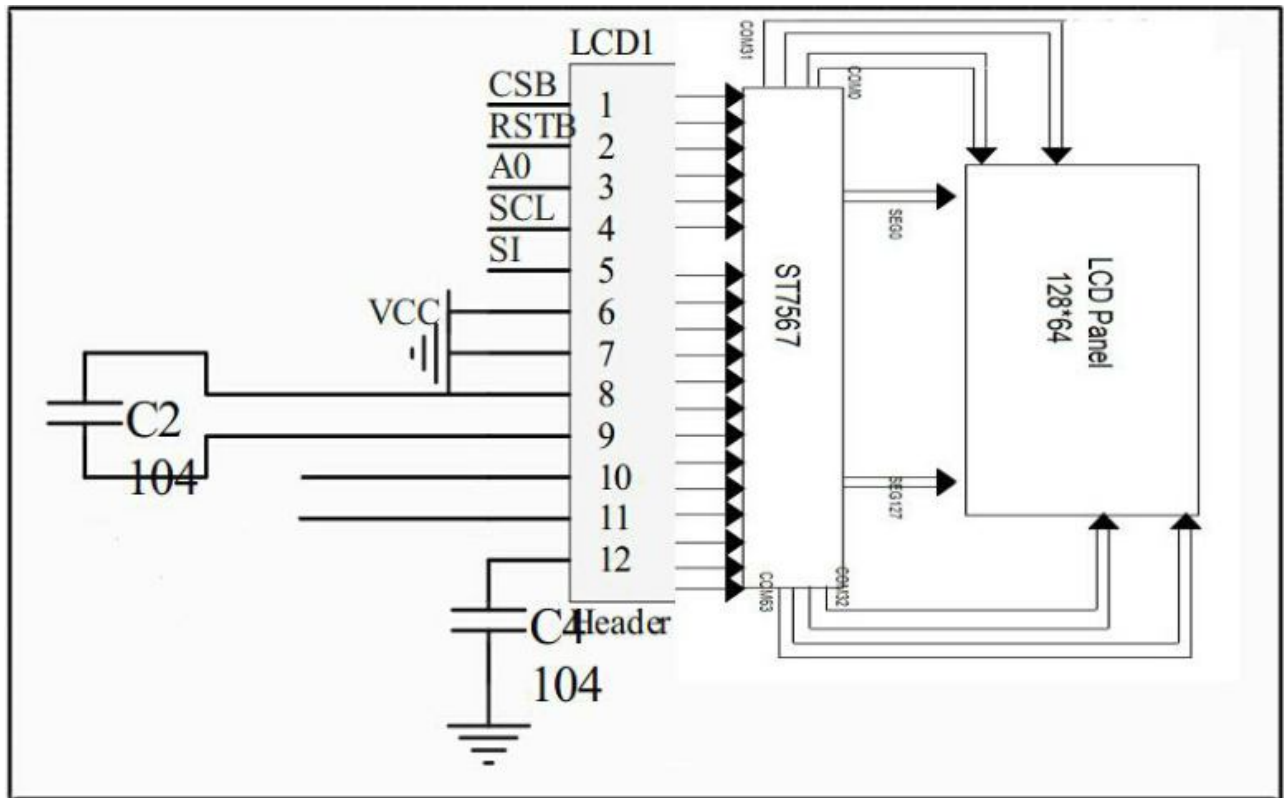

注：以上图外围电路原理串口

C2\C4=0.1uF/25V

## 4. Pin description/PIN 脚描述

| Pin No. | Pin Name   | Function                                                                                 |
|---------|------------|------------------------------------------------------------------------------------------|
| 1       | /CS        | Chip select input pin. 片选                                                                |
| 2       | /RST       | Reset signal ( Low effective) 复位                                                         |
| 3       | A0         | Register select input, H: data; L: command 选择指令或数据                                       |
| 4       | SCL ( D6 ) | Serial pixel clock signal input pin. 时钟                                                  |
| 5       | SI ( D7 )  | Serial data write and read input/output pin. 数据                                          |
| 6       | VDD        | Power Supply. 3.3V 电源                                                                    |
| 7       | VSS        | GND 0V 地                                                                                 |
| 8       | VO         | DC/DC voltage converter. Connect a capacitor between this terminal and the VO terminal.  |
| 9       | XVO        | DC/DC voltage converter. Connect a capacitor between this terminal and the XVO terminal. |
| 10      | NC         | 空脚                                                                                       |
| 11      | NC         | 空脚                                                                                       |
| 12      | VG         | This is a multi-level power supply for the liquid crystal drive 接电容到地                    |
| 背光      | BLA(+)     | LED正极，工作电压3.0V，工作电流40mA~55mA                                                             |
|         | BLK(-)     | LED负极，0V ，也可直接也VSS边接                                                                     |

## 5. Absolute Maximum Ratings/限定参数

| Items                    | Symbol           | MIN. | MAX.                 | Unit | Condition            |
|--------------------------|------------------|------|----------------------|------|----------------------|
| Supply Voltage/供电电压      | V <sub>DD</sub>  | -0.3 | +3.3                 | V    | V <sub>SS</sub> = 0V |
|                          | V <sub>lcd</sub> | -0.3 | +9.0                 | V    | V <sub>SS</sub> = 0V |
| Input Voltage/输入电压       | V <sub>IN</sub>  | -0.3 | V <sub>DD</sub> +0.3 | V    | V <sub>SS</sub> = 0V |
| LED forward current/背光电流 | I <sub>f</sub>   | 0    | 55                   | mA   | ---                  |
| Operating Temp./工作温度     | T <sub>OP</sub>  | -10  | +60                  | °C   | ---                  |
| Storage Temp./储存温度       | T <sub>st</sub>  | -20  | +70                  | °C   | ---                  |

## 6. Electrical Characteristics/电气特性

### 6.1 Typical Electrical Characteristics


(V<sub>SS</sub> = 0V, V<sub>DD</sub> = 3.3V ± 10%, T<sub>OP</sub> = 25°C)

| Items                     | Symbol          | MIN.                | TYP. | MAX.                | Unit | Condition Pin                     |
|---------------------------|-----------------|---------------------|------|---------------------|------|-----------------------------------|
| Operating Voltage/工作电压    | V <sub>DD</sub> | 2.7                 | 3.0  | 3.3                 | V    | V <sub>DD</sub>                   |
| LCD Operating Voltage     | V <sub>op</sub> | -                   | 6.5  | -                   | V    | V <sub>0</sub>                    |
| Input High Voltage/输入高电压  | V <sub>IH</sub> | 0.8 V <sub>DD</sub> | -    | V <sub>DD</sub>     | V    | AO, W/R, RD,<br>D0~D7             |
| Input Low Voltage 输入低电压   | V <sub>IL</sub> | 0                   | -    | 0.4 V <sub>DD</sub> | V    |                                   |
| Output High Voltage 输出高电压 | V <sub>OH</sub> | 0.7                 | -    | V <sub>DD</sub>     | V    | D0~D7                             |
| Output Low Voltage 输出低电压  | V <sub>OL</sub> | 0                   | -    | 0.2                 | V    | D0~D7                             |
| Supply Current/供电电流       | I <sub>DD</sub> | ---                 | 0.6  | 8                   | mA   | V <sub>DD</sub> , V <sub>SS</sub> |

Note 1: There is tolerance in optimum LCD driving voltage during production and it will be within the specified range.

### 6.2 Timing Specifications

The 4-line SPI Interface

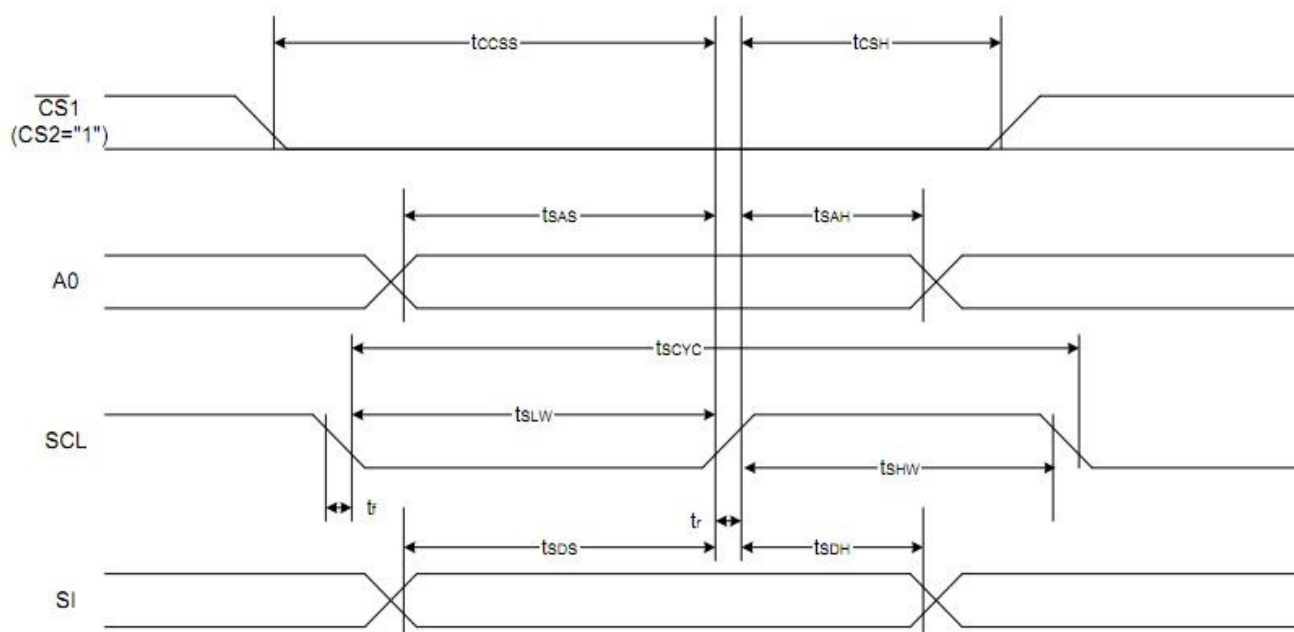

| Item                    | Signal | Symbol     | Condition | Rating |      | Units |
|-------------------------|--------|------------|-----------|--------|------|-------|
|                         |        |            |           | Min.   | Max. |       |
| 4-line SPI Clock Period | SCL    | $T_{scyc}$ |           | 100    | —    | ns    |
| SCL "H" pulse width     |        | $T_{SHW}$  |           | 50     | —    |       |
| SCL "L" pulse width     |        | $T_{SLW}$  |           | 50     | —    |       |
| Address setup time      | A0     | $T_{SAS}$  |           | 30     | —    |       |
| Address hold time       |        | $T_{SAH}$  |           | 20     | —    |       |
| Data setup time         | SI     | $T_{SDS}$  |           | 30     | —    |       |
| Data hold time          |        | $T_{SDH}$  |           | 20     | —    |       |
| CS-SCL time             | CS     | $T_{CSS}$  |           | 30     | —    |       |
| CS-SCL time             |        | $T_{CSH}$  |           | 60     | —    |       |

### Reset timing

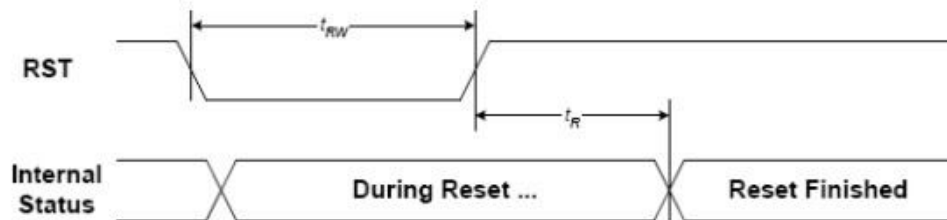


FIGURE 15: Reset Characteristics

( $1.65V \leq V_{DD} < 3.3V$ ,  $T_a = -30$  to  $+85^{\circ}C$ )

| Symbol   | Signal                   | Description                          | Condition | Min. | Max. | Units   |
|----------|--------------------------|--------------------------------------|-----------|------|------|---------|
| $t_{RW}$ | RST                      | Reset low pulse width                |           | 3    | —    | $\mu S$ |
| $t_R$    | RST,,<br>Internal Status | Reset to Internal Status pulse delay |           | 6    | —    | mS      |


## 7. Backlight Characteristics/背光特性

| Items               | Symbol            | MIN. | TYP. | MAX. | Unit     | Condition  |
|---------------------|-------------------|------|------|------|----------|------------|
| Forward Voltage/电压  | $V_f$             | 2.8  | 3.0  | 3.1  | V        | $I_f=10mA$ |
| Reverse current/电流  | $I_r$             | ---  | 40   | 55   | mA       | $V_r=3V$   |
| Peak wave length/波长 | $\lambda$         | ---  | ---  | ---  | nM       | $I_f=20mA$ |
| Luminance/亮度        | $L_v$             | ---  | ---  | ---  | $Cd/m^2$ | $I_f=20mA$ |
| Color /颜色           | White (白色, 或者其他色) |      |      |      |          |            |


## 8. Electrical-Optical Characteristics/光学特性

| Items                    | Symbol   | Condition   | MIN. | TYP. | MAX. | Unit   | NOTE |
|--------------------------|----------|-------------|------|------|------|--------|------|
| Response time/反应时间       | Tr       | Ta= 25℃     | ---  | 185  | ---  | ms     | 2    |
|                          | Tf       |             | ---  | 200  | ---  |        |      |
| Contrast ratio/对比度       | Cr       | Ta= 25℃     | ---  | --   | ---  |        | 3    |
| Viewing angle range/视角范围 | $\theta$ | Cr $\geq$ 2 | -40  | ---  | 40   | degree |      |


Note 1. Definition of response time

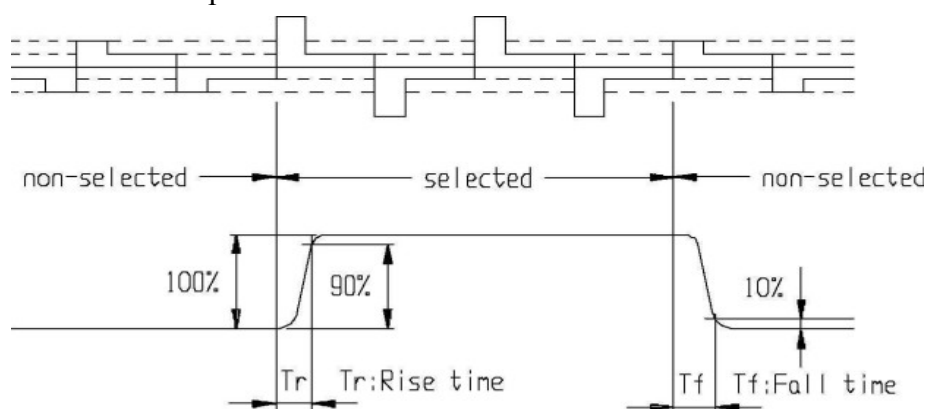

Note2 . Definition of Contrast Ratio 'Cr'

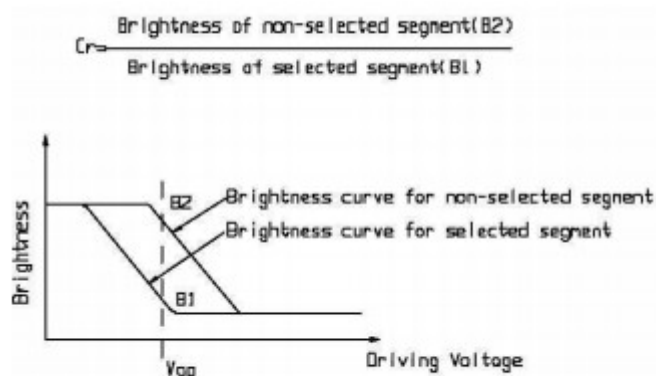

Note 3. Definition of Viewing Angle Range ' $\theta$ '

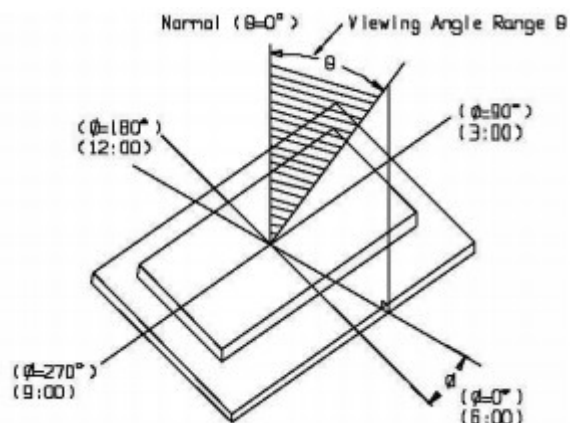

## 9. Control and display commands/指令描述

### COMMAND TABLE

The following is a list of host commands supported by UC1701x

C/D: 0: Control, 1: Data  
W/R: 0: Write Cycle, 1: Read Cycle  
# Useful Data bits – Don't Care

|     | Command                                             | C/D | W/R | D7 | D6 | D5 | D4  | D3 | D2 | D1 | D0 | Action                        | Default |
|-----|-----------------------------------------------------|-----|-----|----|----|----|-----|----|----|----|----|-------------------------------|---------|
| 1.  | Write Data Byte                                     | 1   | 0   | #  | #  | #  | #   | #  | #  | #  | #  | Write 1 byte                  | N/A     |
| 2.  | Read Data Byte                                      | 1   | 1   | #  | #  | #  | #   | #  | #  | #  | #  | Read 1 byte                   | N/A     |
| 3.  | Get Status                                          | 0   | 1   | BZ | MX | DE | RST | 0  | 0  | 0  | 0  | Get Status                    | --      |
| 4.  | Set Column Address LSB                              | 0   | 0   | 0  | 0  | 0  | 0   | #  | #  | #  | #  | Set CA [3:0]                  | 0       |
|     | Set Column Address MSB                              |     |     | 0  | 0  | 0  | 1   | #  | #  | #  | #  | Set CA [7:4]                  | 0       |
| 5.  | Set Power Control                                   | 0   | 0   | 0  | 0  | 1  | 0   | 1  | #  | #  | #  | Set PC[2:0]                   | 000b    |
| 6.  | Set Scroll Line                                     | 0   | 0   | 0  | 1  | #  | #   | #  | #  | #  | #  | Set SL[5:0]                   | 0       |
| 7.  | Set Page Address                                    | 0   | 0   | 1  | 0  | 1  | 1   | #  | #  | #  | #  | Set PA[3:0]                   | 0       |
| 8.  | Set V <sub>LCD</sub> Resistor Ratio                 | 0   | 0   | 0  | 0  | 1  | 0   | 0  | #  | #  | #  | Set PC[5:3]                   | 100b    |
| 9.  | Set Electronic Volume<br>(double-byte command)      | 0   | 0   | 1  | 0  | 0  | 0   | 0  | 0  | 0  | 1  | Set PM[5:0]                   | 20H     |
|     |                                                     |     |     | 0  | 0  | #  | #   | #  | #  | #  | #  |                               |         |
| 10. | Set All-Pixel-ON                                    | 0   | 0   | 1  | 0  | 1  | 0   | 0  | 1  | 0  | #  | Set DC[1]                     | 0b      |
| 11. | Set Inverse Display                                 | 0   | 0   | 1  | 0  | 1  | 0   | 0  | 1  | 1  | #  | Set DC[0]                     | 0b      |
| 12. | Set Display Enable                                  | 0   | 0   | 1  | 0  | 1  | 0   | 1  | 1  | 1  | #  | Set DC[2]                     | 0b      |
| 13. | Set SEG Direction                                   | 0   | 0   | 1  | 0  | 1  | 0   | 0  | 0  | 0  | #  | Set LC[0]                     | 0b      |
| 14. | Set COM Direction                                   | 0   | 0   | 1  | 1  | 0  | 0   | #  | -  | -  | -  | Set LC[1]                     | 0b      |
| 15. | System Reset                                        | 0   | 0   | 1  | 1  | 1  | 0   | 0  | 0  | 1  | 0  | System Reset                  | N/A     |
| 16. | NOP                                                 | 0   | 0   | 1  | 1  | 1  | 0   | 0  | 0  | 1  | 1  | No operation                  | N/A     |
| 17. | Set LCD Bias Ratio                                  | 0   | 0   | 1  | 0  | 1  | 0   | 0  | 0  | 1  | #  | Set BR                        | 0b      |
| 18. | Set Cursor Update Mode                              | 0   | 0   | 1  | 1  | 1  | 0   | 0  | 0  | 0  | 0  | AC3=1, CR=CA                  | N/A     |
| 19. | Reset Cursor Update Mode                            | 0   | 0   | 1  | 1  | 1  | 0   | 1  | 1  | 1  | 0  | AC3=0, CA=CR.                 | N/A     |
| 20. | Set Static Indicator OFF                            | 0   | 0   | 1  | 0  | 1  | 0   | 1  | 1  | 0  | 0  | NOP                           | N/A     |
| 21. | Set Static Indicator ON                             | 0   | 0   | 1  | 0  | 1  | 0   | 1  | 1  | 0  | 1  | NOP                           | N/A     |
|     | Set Static Indicator                                |     |     | -  | -  | -  | -   | -  | -  | -  | -  |                               |         |
| 22. | Set Booster Ratio<br>(double-byte command)          | 0   | 0   | 1  | 1  | 1  | 1   | 1  | 0  | 0  | 0  | NOP                           | 00b     |
|     |                                                     |     |     | 0  | 0  | 0  | 0   | 0  | 0  | #  | #  |                               |         |
| 23. | Set Power Save<br>(compound command)                | 0   | 0   | #  | #  | #  | #   | #  | #  | #  | #  | Display OFF &<br>All Pixel ON | N/A     |
| 24. | Set Test Control<br>(double-byte command)           | 0   | 0   | 1  | 1  | 1  | 1   | 1  | 1  | TT |    | For UCI only<br>Do NOT use    | N/A     |
|     |                                                     |     |     | -  | #  | #  | #   | #  | #  | #  | #  |                               |         |
| 25. | Set Adv. Program Control 0<br>(double-byte command) | 0   | 0   | 1  | 1  | 1  | 1   | 1  | 0  | 1  | 0  | Set TC, WA[1:0]               | 90H     |
|     |                                                     |     |     | #  | 0  | 0  | 1   | 0  | 0  | #  | #  |                               |         |
| 26. | Set Adv. Program Control 1<br>(double-byte command) | 0   | 0   | 1  | 1  | 1  | 1   | 1  | 0  | 1  | 1  | For UCI only<br>Set APC1      | N/A     |
|     |                                                     |     |     | #  | #  | #  | #   | #  | #  | #  | #  |                               |         |

\* Other than commands listed above, all other bit patterns result in NOP (No Operation).

## 10. DDRAM 映射表

| PA[3:0] | 0  | Line<br>AddrCsa |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | Panel<br>Location | MY=0 |       | MY=1 |      |       |       |
|---------|----|-----------------|------|-------|------|------|-------|-------|--------|--|--|--|--|--|--|--|--|--|-------------------|------|-------|------|------|-------|-------|
|         |    |                 | SL=0 | SL=16 | SL=0 | SL=0 | SL=25 | SL=25 |        |  |  |  |  |  |  |  |  |  |                   | SL=0 | SL=16 | SL=0 | SL=0 | SL=25 | SL=25 |
| 0000    | D0 | 00H             | 0    | 1     |      |      |       |       | Page 0 |  |  |  |  |  |  |  |  |  | COM1              | C1   | C49   | C64  | C48  | C25   | C9    |
|         | D1 | 01H             | 0    | 1     |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM2              | C2   | C50   | C63  | C47  | C24   | C8    |
|         | D2 | 02H             | 0    | 0     |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM3              | C3   | C51   | C62  | C46  | C23   | C7    |
|         | D3 | 03H             | 0    | 0     |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM4              | C4   | C52   | C61  | C45  | C22   | C6    |
|         | D4 | 04H             | 0    | 1     |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM5              | C5   | C53   | C60  | C44  | C21   | C5    |
|         | D5 | 05H             | 1    | 1     |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM6              | C6   | C54   | C59  | C43  | C20   | C4    |
|         | D6 | 06H             | 1    | 0     |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM7              | C7   | C55   | C58  | C42  | C19   | C3    |
|         | D7 | 07H             | 1    | 0     |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM8              | C8   | C56   | C57  | C41  | C18   | C2    |
| 0001    | D0 | 08H             |      |       |      |      |       |       | Page 1 |  |  |  |  |  |  |  |  |  | COM9              | C9   | C57   | C56  | C40  | C17   | C1    |
|         | D1 | 09H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM10             | C10  | C58   | C55  | C39  | C16   | --    |
|         | D2 | 0AH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM11             | C11  | C59   | C54  | C38  | C15   | --    |
|         | D3 | 0BH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM12             | C12  | C60   | C53  | C37  | C14   | --    |
|         | D4 | 0CH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM13             | C13  | C61   | C52  | C36  | C13   | --    |
|         | D5 | 0DH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM14             | C14  | C62   | C51  | C35  | C12   | --    |
|         | D6 | 0EH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM15             | C15  | C63   | C50  | C34  | C11   | --    |
|         | D7 | 0FH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM16             | C16  | C64   | C49  | C33  | C10   | --    |
| 0010    | D0 | 10H             |      |       |      |      |       |       | Page 2 |  |  |  |  |  |  |  |  |  | COM17             | C17  | C1    | C48  | C32  | C9    | --    |
|         | D1 | 11H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM18             | C18  | C2    | C47  | C31  | C8    | --    |
|         | D2 | 12H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM19             | C19  | C3    | C46  | C30  | C7    | --    |
|         | D3 | 13H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM20             | C20  | C4    | C45  | C29  | C6    | --    |
|         | D4 | 14H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM21             | C21  | C5    | C44  | C28  | C5    | --    |
|         | D5 | 15H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM22             | C22  | C6    | C43  | C27  | C4    | --    |
|         | D6 | 16H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM23             | C23  | C7    | C42  | C26  | C3    | --    |
|         | D7 | 17H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM24             | C24  | C8    | C41  | C25  | C2    | --    |
| 0011    | D0 | 18H             |      |       |      |      |       |       | Page 3 |  |  |  |  |  |  |  |  |  | COM25             | C25  | C9    | C40  | C24  | C1    | --    |
|         | D1 | 19H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM26             | C26  | C10   | C39  | C23  | C64   | C48*  |
|         | D2 | 1AH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM27             | C27  | C11   | C38  | C22  | C63   | C47   |
|         | D3 | 1BH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM28             | C28  | C12   | C37  | C21  | C62   | C46   |
|         | D4 | 1CH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM29             | C29  | C13   | C36  | C20  | C61   | C45   |
|         | D5 | 1DH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM30             | C30  | C14   | C35  | C19  | C60   | C44   |
|         | D6 | 1EH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM31             | C31  | C15   | C34  | C18  | C59   | C43   |
|         | D7 | 1FH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM32             | C32  | C16   | C33  | C17  | C58   | C42   |
| 0100    | D0 | 20H             |      |       |      |      |       |       | Page 4 |  |  |  |  |  |  |  |  |  | COM33             | C33  | C17   | C32  | C16  | C57   | C41   |
|         | D1 | 21H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM34             | C34  | C18   | C31  | C15  | C56   | C40   |
|         | D2 | 22H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM35             | C35  | C19   | C30  | C14  | C55   | C39   |
|         | D3 | 23H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM36             | C36  | C20   | C29  | C13  | C54   | C38   |
|         | D4 | 24H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM37             | C37  | C21   | C28  | C12  | C53   | C37   |
|         | D5 | 25H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM38             | C38  | C22   | C27  | C11  | C52   | C36   |
|         | D6 | 26H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM39             | C39  | C23   | C26  | C10  | C51   | C35   |
|         | D7 | 27H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM40             | C40  | C24   | C25  | C9   | C50   | C34   |
| 0101    | D0 | 28H             |      |       |      |      |       |       | Page 5 |  |  |  |  |  |  |  |  |  | COM41             | C41  | C25   | C24  | C8   | C49   | C33   |
|         | D1 | 29H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM42             | C42  | C26   | C23  | C7   | C48   | C32   |
|         | D2 | 2AH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM43             | C43  | C27   | C22  | C6   | C47   | C31   |
|         | D3 | 2BH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM44             | C44  | C28   | C21  | C5   | C46   | C30   |
|         | D4 | 2CH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM45             | C45  | C29   | C20  | C4   | C45   | C29   |
|         | D5 | 2DH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM46             | C46  | C30   | C19  | C3   | C44   | C28   |
|         | D6 | 2EH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM47             | C47  | C31   | C18  | C2   | C43   | C27   |
|         | D7 | 2FH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM48             | C48  | C32   | C17  | C1   | C42   | C26   |
| 0110    | D0 | 30H             |      |       |      |      |       |       | Page 6 |  |  |  |  |  |  |  |  |  | COM49             | C49  | C33   | C16  | --   | C41   | C25   |
|         | D1 | 31H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM50             | C50  | C34   | C15  | --   | C40   | C24   |
|         | D2 | 32H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM51             | C51  | C35   | C14  | --   | C39   | C23   |
|         | D3 | 33H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM52             | C52  | C36   | C13  | --   | C38   | C22   |
|         | D4 | 34H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM53             | C53  | C37   | C12  | --   | C37   | C21   |
|         | D5 | 35H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM54             | C54  | C38   | C11  | --   | C36   | C20   |
|         | D6 | 36H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM55             | C55  | C39   | C10  | --   | C35   | C19   |
|         | D7 | 37H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM56             | C56  | C40   | C9   | --   | C34   | C18   |
| 0111    | D0 | 38H             |      |       |      |      |       |       | Page 7 |  |  |  |  |  |  |  |  |  | COM57             | C57  | C41   | C8   | --   | C33   | C17   |
|         | D1 | 39H             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM58             | C58  | C42   | C7   | --   | C32   | C16   |
|         | D2 | 3AH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM59             | C59  | C43   | C6   | --   | C31   | C15   |
|         | D3 | 3BH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM60             | C60  | C44   | C5   | --   | C30   | C14   |
|         | D4 | 3CH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM61             | C61  | C45   | C4   | --   | C29   | C13   |
|         | D5 | 3DH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM62             | C62  | C46   | C3   | --   | C28   | C12   |
|         | D6 | 3EH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM63             | C63  | C47   | C2   | --   | C27   | C11   |
|         | D7 | 3FH             |      |       |      |      |       |       |        |  |  |  |  |  |  |  |  |  | COM64             | C64  | C48   | C1   | --   | C26   | C10   |
| 1000    | D0 | 40H             |      |       |      |      |       |       | Page 8 |  |  |  |  |  |  |  |  |  | CIC               | CIC  | CIC   | CIC  | CIC  | CIC   | CIC   |

|      |        |        |        |        |        |        |        |        |  |        |        |        |        |        |        |        |        |
|------|--------|--------|--------|--------|--------|--------|--------|--------|--|--------|--------|--------|--------|--------|--------|--------|--------|
| MX=0 | SEG1   | SEG2   | SEG3   | SEG4   | SEG5   | SEG6   | SEG7   | SEG8   |  | SEG26  | SEG27  | SEG28  | SEG29  | SEG30  | SEG31  | SEG32  | SEG33  |
|      | SEG132 | SEG131 | SEG130 | SEG129 | SEG128 | SEG127 | SEG126 | SEG125 |  | SEG124 | SEG123 | SEG122 | SEG121 | SEG120 | SEG119 | SEG118 | SEG117 |
| MX=1 | SEG1   | SEG2   | SEG3   | SEG4   | SEG5   | SEG6   | SEG7   | SEG8   |  | SEG26  | SEG27  | SEG28  | SEG29  | SEG30  | SEG31  | SEG32  | SEG33  |
|      | SEG132 | SEG131 | SEG130 | SEG129 | SEG128 | SEG127 | SEG126 | SEG125 |  | SEG124 | SEG123 | SEG122 | SEG121 | SEG120 | SEG119 | SEG118 | SEG117 |


  

|     |    |    |    |
|-----|----|----|----|
| 65  | 49 | 65 | 49 |
| MUX |    |    |    |

Example for memory mapping: let MX = 0, MY = 0, SL = 0, according to the data shown in the above table:

- Page 0 SEG 1 (D7-D0) : 11100000b
- Page 0 SEG 2 (D7-D0) : 00110011b

## 12. Inspection Standards/检验标准
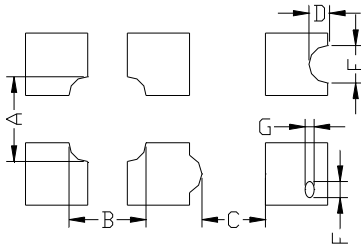
| Item                                                                | Criterion for defects                                                                                                                                                                                                                                                                                                                                                                           | Defect type |
|---------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| 1) Display on inspection/显示效果                                       | (1) Non display (2) Vertical line is deficient<br>(3) Horizontal line is deficient (4) Cross line is deficient                                                                                                                                                                                                                                                                                  | Major       |
| 2) Black / White spot/黑点或白点                                         | Size $\Phi$ (mm) Acceptable number<br>$\Phi \leq 0.3$ Ignore (note)<br>$0.3 < \Phi \leq 0.45$ 3<br>$0.45 < \Phi \leq 0.6$ 1<br>$0.6 < \Phi$ 0                                                                                                                                                                                                                                                   | Minor       |
| 3) Black / White line/黑线或白线                                         | Length (mm) Width (mm) Acceptable number<br>$L \leq 10$ $W \leq 0.03$ Ignore<br>$5.0 \leq L \leq 10$ $0.03 < W \leq 0.04$ 3<br>$5.0 \leq L \leq 10$ $0.04 < W \leq 0.05$ 2<br>$1.0 \leq L \leq 10$ $0.05 < W \leq 0.06$ 2<br>$1.0 \leq L \leq 10$ $0.06 < W \leq 0.08$ 1<br>$L \leq 10$ $0.08 < W$ follows 2) point defect<br>Defects separate with each other at an interval of more than 20mm | Minor       |
| 4) Display pattern/显示模式                                             |  <p> <math>\frac{A+B \leq 0.28}{2}</math> <math>0 &lt; C</math> <math>\frac{D+E \leq 0.25}{2}</math> <math>\frac{F+G \leq 0.25}{2}</math> </p> <p>Note: 1) Up to 3 damages acceptable<br/> 2) Not allowed if there are two or more pinholes every three-fourth inch.</p>                                      | Minor       |
| 5) Spot-like contrast irregularity/均匀度                              | Size $\Phi$ (mm) Acceptable Number<br>$\Phi \leq 0.7$ Ignore (note)<br>$0.7 < \Phi \leq 1.0$ 3<br>$1.0 < \Phi \leq 1.5$ 1<br>$1.5 < \Phi$ 0<br>Note: 1) Conformed to limit samples.<br>2) Intervals of defects are more than 30mm.                                                                                                                                                              | Minor       |
| 6) Bubbles in polarizer/玻璃内有气泡                                      | Size $\Phi$ (mm) Acceptable Number<br>$\Phi \leq 0.4$ Ignore (note)<br>$0.4 < \Phi \leq 0.65$ 2<br>$0.65 < \Phi \leq 1.2$ 1<br>$1.2 < \Phi$ 0                                                                                                                                                                                                                                                   | Minor       |
| 7) Scratches and dent on the polarizer/玻璃刮痕/凹痕                      | Scratches and dent on the polarizer shall be in the accordance with "2) Black/white spot", and "3) Black/White line".                                                                                                                                                                                                                                                                           | Minor       |
| 8) Stains on the surface of LCD panel/玻璃上有污点                        | Stains which cannot be removed even when wiped lightly with a soft cloth or similar cleaning.                                                                                                                                                                                                                                                                                                   | Minor       |
| 9) Rainbow color/杂色                                                 | No rainbow color is allowed in the optimum contrast on state within the active area.                                                                                                                                                                                                                                                                                                            | Minor       |
| 10) Viewing-area encroachment/玻璃边线出现在视域                             | Polarizer edge or line is visible in the opening viewing area due to polarizer shortness or sealing line.                                                                                                                                                                                                                                                                                       | Minor       |
| 11) Bezel appearance/铁筐外观                                           | Rust and deep damages that are visible in the bezel are rejected.                                                                                                                                                                                                                                                                                                                               | Minor       |
| 12) Defect of land surface 表面缺陷                                     | Evident crevices that are visible are rejected.                                                                                                                                                                                                                                                                                                                                                 | Minor       |
| 13) Parts mounting/部件安装                                             | (1) Failure to mount parts<br>(2) Parts not in the specifications are mounted<br>(3) For example: Polarity is reversed, HSC or TCP falls off.                                                                                                                                                                                                                                                   | Minor       |
| 14) Part alignment/部件结合度                                            | (1) LSI, IC lead width is more than 50% beyond pad outline.<br>(2) More than 50% of LSI, IC leads is off the pad outline.                                                                                                                                                                                                                                                                       | Minor       |
| 15) Conductive foreign matter (solder ball, solder hips)/杂质 (焊接遗留物) | (1) $0.45 < \Phi$ , $N \geq 1$<br>(2) $0.3 < \Phi \leq 0.45$ , $N \geq 1$ , $\Phi$ : Average diameter of solder ball (unit: mm)<br>(3) $0.5 < L$ , $N \geq 1$ , $L$ : Average length of solder chip (unit: mm)                                                                                                                                                                                  | Minor       |
| 16) Bezel flaw/铁筐缺陷                                                 | Bezel claw missing or not bent                                                                                                                                                                                                                                                                                                                                                                  | Minor       |
| 17) Indication on name plate (sampling indication label)/标志         | (1) Failure to stamp or label error, or not legible.(all acceptable if legible)<br>(2) The separation is more than 1/3 for indication discoloration, in which the characters can be checked.                                                                                                                                                                                                    | Minor       |

## 12. Handling precautions 注意事项

1. Refrain from strong mechanical shock and forces to the module. It may cause improper operating or damage to the module.  
防止震动和压迫模组，以免造成模组损坏和运行正常。
2. The polarizer used on the display surface is easily scratched and damaged. Extreme care should be taken when handling. When cleaning the display surface, use soft cloth with a solvent recommended : ethyl alcohol , isopropyl or hexane) and wipe gently, do not use the following solvents : water, ketone or aromatics .  
模组表面的偏光极易被刮伤和损坏，所以操作是要非常小心。请用蘸有乙醇，丙酮等溶剂的湿软布轻轻擦拭，不要使用水，乙酮等溶剂。
3. Wipe off water or oil drop immediately If you leave drop for a long time, stain and discoloration may occur.  
要立即擦拭掉屏幕上的油滴和水滴，否则会出现污点和杂质。
4. Do not touch pads or pins of interface directly with bare hands. When handling the LCD module, put on a soft glover like finger-glover.  
不要直接用手去触碰接口处的金属管脚。当操作模组的时候，请配带软指套。
5. Protect the module from static electricity, it may cause damage to CMOS LSI.  
模组需要有防静电保护，否则会损坏CMOS LSI。
6. To prevent LCD panels from degradation, do not operate or store them exposed directly to sunlight or high temperature/humidity.  
不要直接在太阳,高温或潮湿环境下操作和储存LCD模组，以免影响模组的质量。
7. If the liquid crystal leaks from the panel it should be kept away from the eyes and mouths. In case of contact with skins, wash away thoroughly with soap and water.  
若有液晶漏出，务必避免其入眼入口。若沾到皮肤上了，马上用肥皂和水冲洗干净。
8. Soldering should be only performed on the I/O terminals within the temperature of  $280 \pm 20^{\circ}\text{C}$  and soldering time should be less than 4 seconds.  
要在 $280 \pm 20^{\circ}\text{C}$ 的条件下在I/O终端实现焊接，并且保证焊接时间短于4秒。
9. Supply voltage within the specified voltage limit, the maximum rating, higher voltage cause the shorter LCD life or damaged.  
绝对要在指定的电压范围内驱动模组， 因为如果在高于指定电压的情况下驱动模组，会使模组寿命变短
10. Do not input any signals before power is turned on. Do not connect or disconnect the module on the state of Power-ON.  
供电之前不要输入任何信号，不要在通电时连接和段开 LCD 模组。