


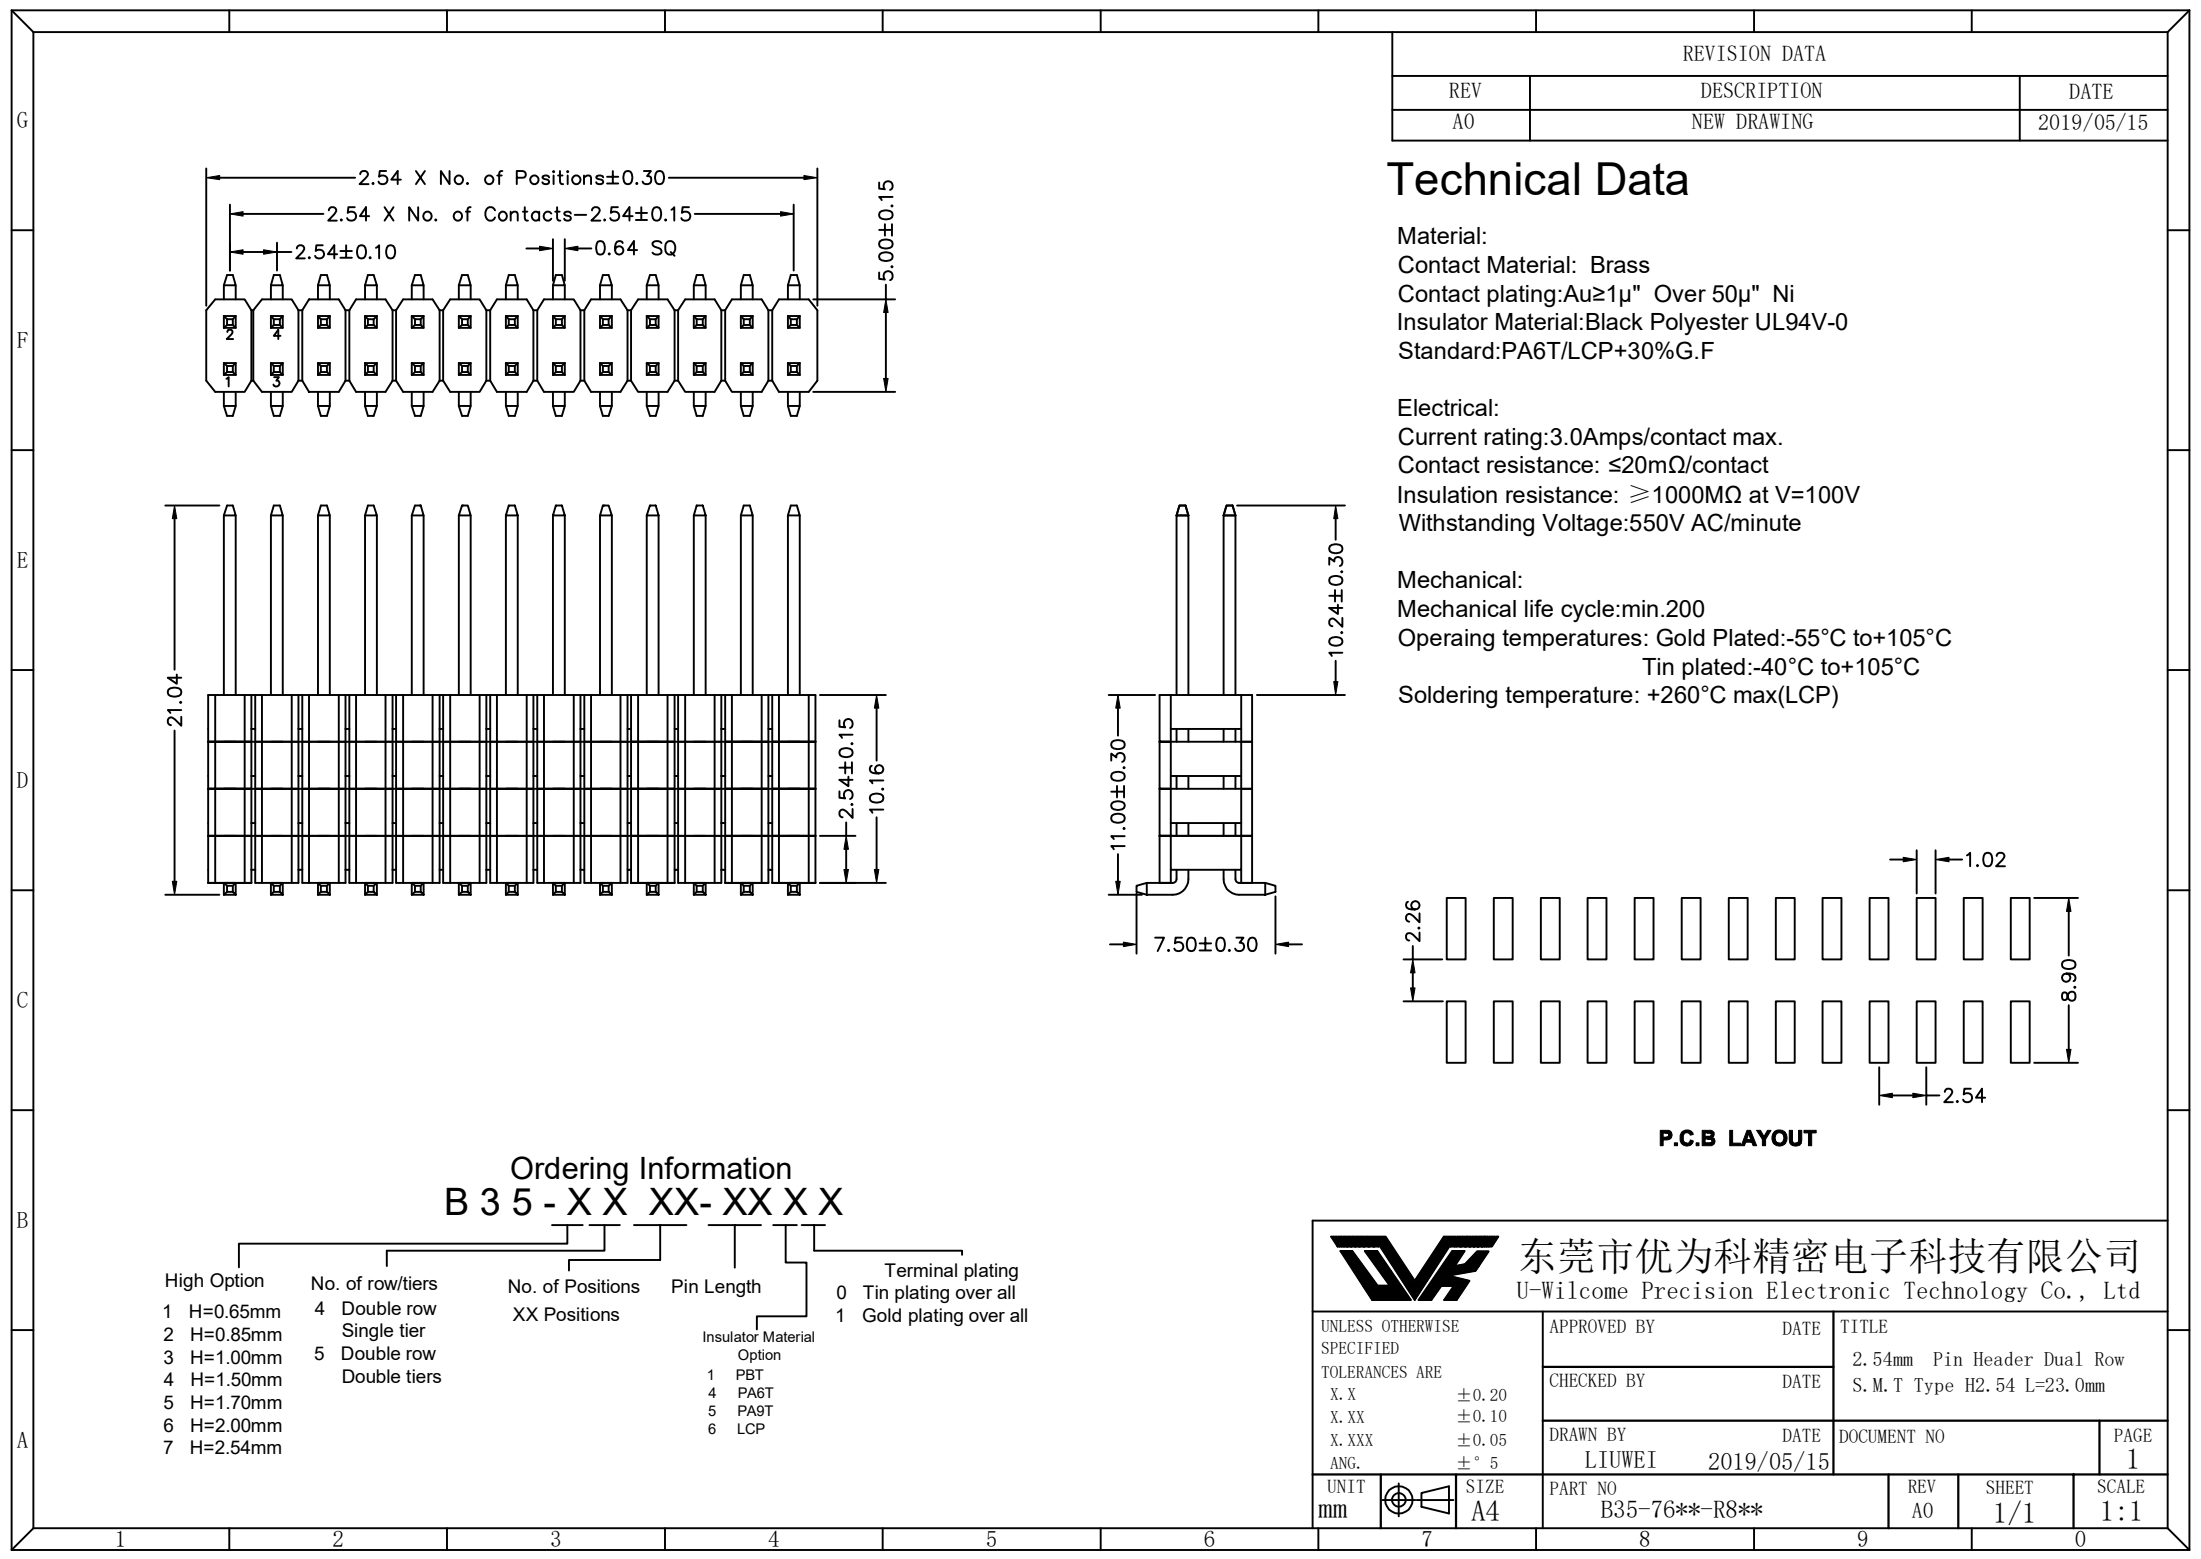


REVISION DATA		
REV	DESCRIPTION	DATE
AO	NEW DRAWING	2019/05/15

Technical Data

Material:
Contact Material: Brass
Contact plating: Au≥1μ" Over 50μ" Ni
Insulator Material: Black Polyester UL94V-0
Standard: PA6T/LCP+30%G.F

Electrical:
Current rating: 3.0Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Withstanding Voltage: 550V AC/minute

Mechanical:
Mechanical life cycle: min.200
Operating temperatures: Gold Plated: -55°C to +105°C
Tin plated: -40°C to +105°C
Soldering temperature: +260°C max(LCP)

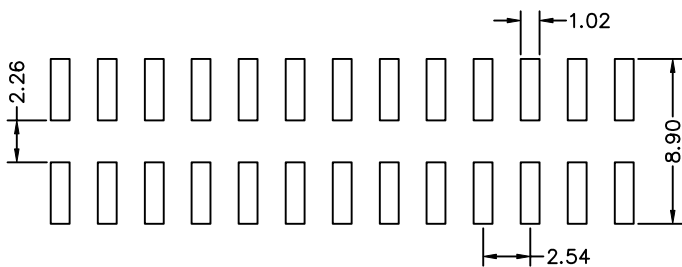

P.C.B LAYOUT

Ordering Information B 3 5 - X X XX- X X X X

High Option	No. of row/tiers	No. of Positions	Pin Length	Terminal plating
1 H=0.65mm	4 Double row	XX Positions		0 Tin plating over all
2 H=0.85mm	Single tier			1 Gold plating over all
3 H=1.00mm	Double row			
4 H=1.50mm	Double tiers			
5 H=1.70mm				
6 H=2.00mm				
7 H=2.54mm				

Insulator Material
Option
1 PBT
4 PA6T
5 PA9T
6 LCP

		东莞市优为科精密电子科技有限公司	
U-Wilcome Precision Electronic Technology Co., Ltd			
UNLESS OTHERWISE SPECIFIED		APPROVED BY	DATE
TOLERANCES ARE		CHECKED BY	DATE
X. X	± 0.20	TITLE	
X. XX	± 0.10	2.54mm Pin Header Dual Row	
X. XXX	± 0.05	S. M. T Type H2.54 L=23.0mm	
ANG.	± ° 5	DRAWN BY	DATE
UNIT		LIUWEI	2019/05/15
mm	SIZE	DOCUMENT NO	
A4	PART NO	PAGE	
	B35-76*-R8**	1	
	REV	SHEET	SCALE
	AO	1/1	1:1