

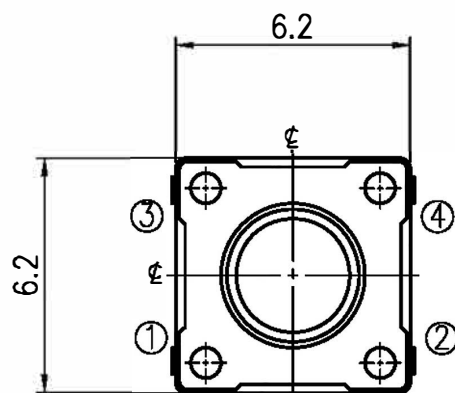


RoHS Compliant

⑧

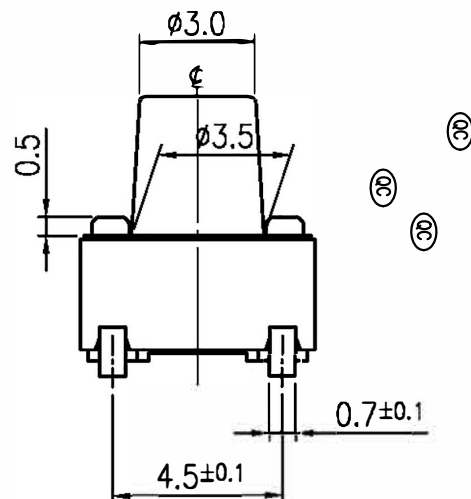


⑧

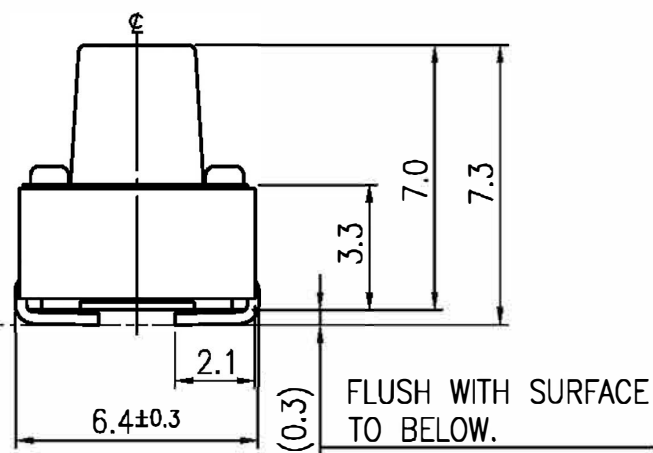


REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2019.01.31	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)			
INSULATION RESISTANCE		DC500V-100MΩ MIN.		STROKE (ANGLE)		0.25±0.15 mm	
WITHSTAND VOLTAGE		AC250V-1MINUTE.		LIFE			
REMARKS:							

SCHEMATIC

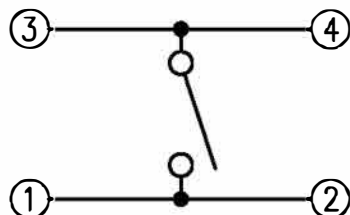


P.C.B MOUNTING PLAN

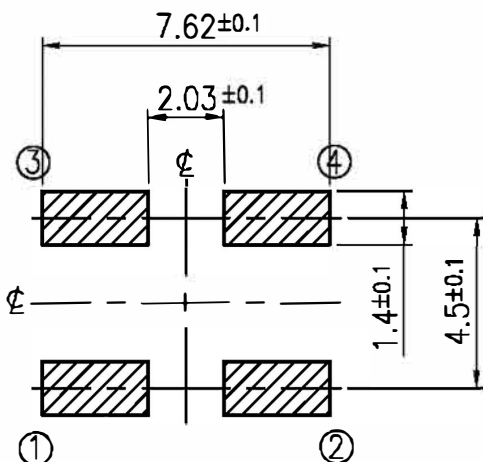

HATCHED AREA SHOWS SOLDERING LAND

MODEL NO.	OPERATION FORCE	LIFE CYCLES
ETC014-AP1U-F160T	160±50gf	1,000,000
ETC014-AP1U-F260T	260±50gf	200,000

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2		SIGNATURES	DATE	MODEL
		DRAWER Jane Shen	2019.01.31	TITLE TACT SWITCH
		CHECKED		
		REVIEWED		
		APPROVALS		



UNIT mm ⑧


SCALE 5/1

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS


RoHS Compliant

1.STRUCTURE AND MATERIALS

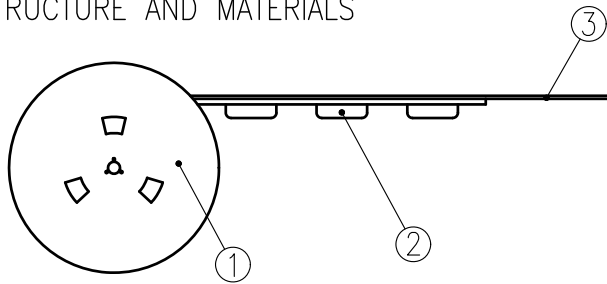

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 400 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180° .
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

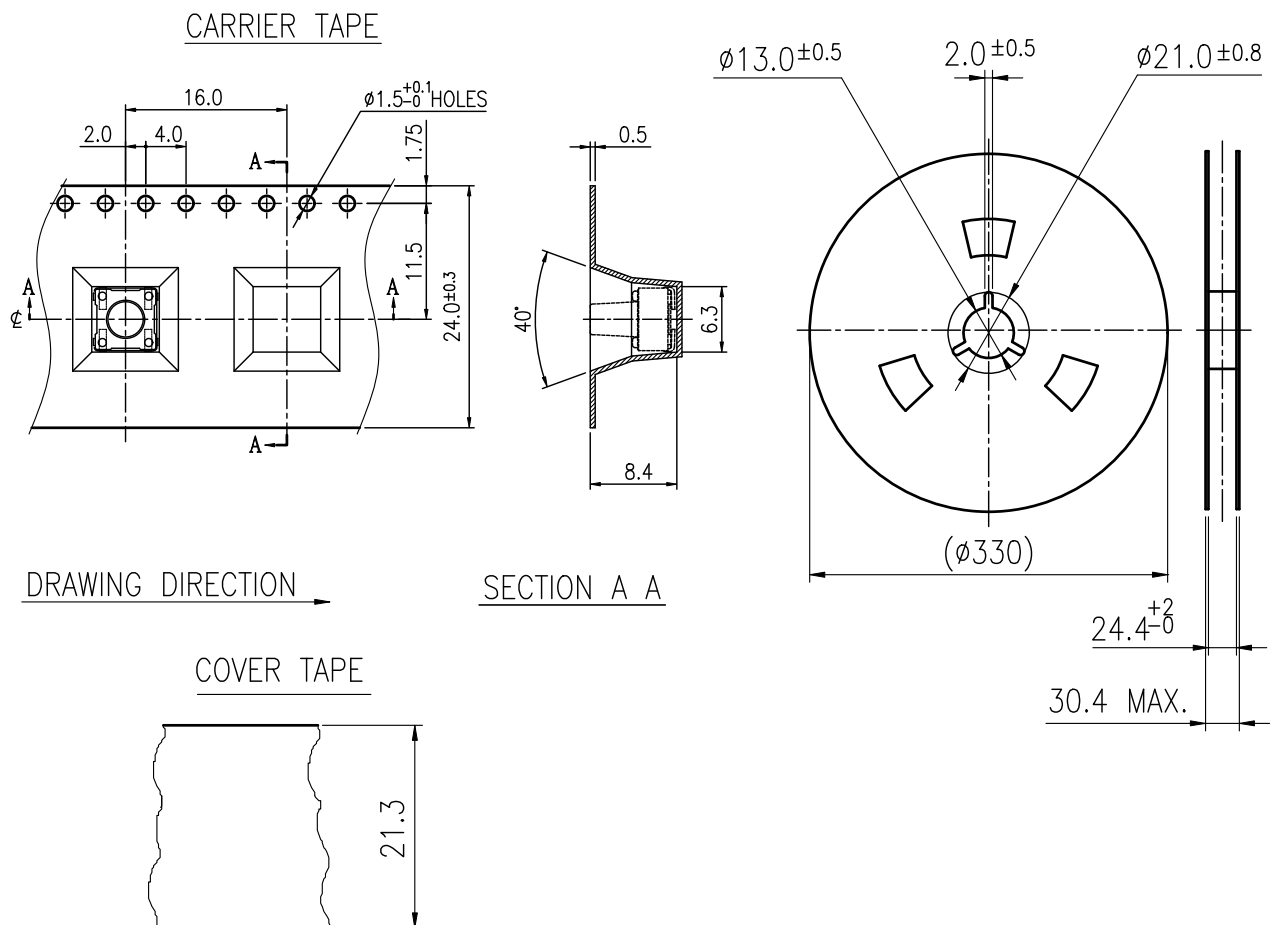

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
							Jane Shen	NTC014-AP1U-F260TW
							2011.12.24	PAGINATE.
								1/1
								SPEC NO.
								P-693
SYM	DISCRPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.