

RoHS Compliant




REVISIONS





Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2019.01.10	Jane Shen	C			
B				D			

SPECIFICATIONS

RATING	DC12V 50mA	TIMING	
CONTACT RESISTANCE	100mΩ MAX.	OPERATION (TORQUE)	160±50 gf
INSULATION RESISTANCE	DC500V – 100MΩ MIN.	STROKE (ANGLE)	0.2±0.1 mm
WITHSTAND VOLTAGE	AC100V – 1 MINUTE.	LIFE	1,000,000 CYCLES
REMARKS:			

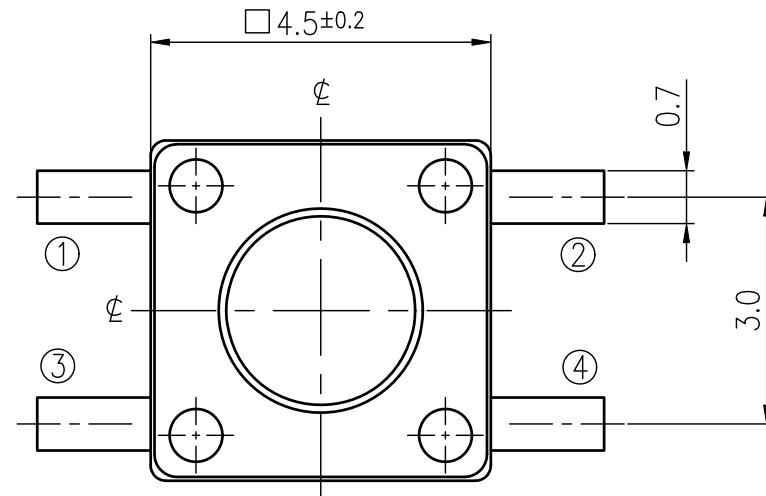

SCHEMATIC

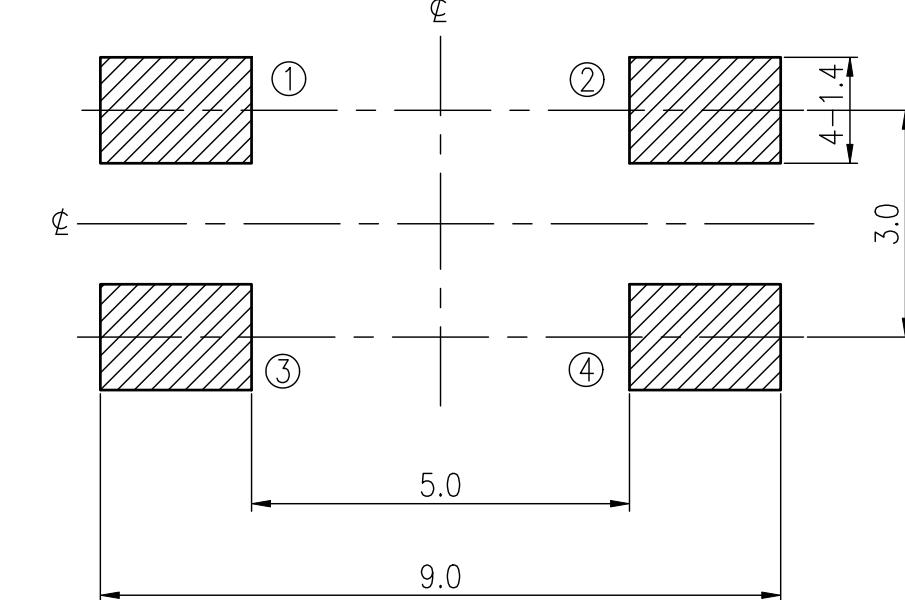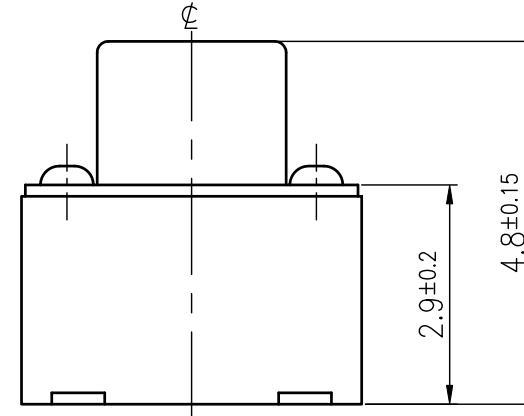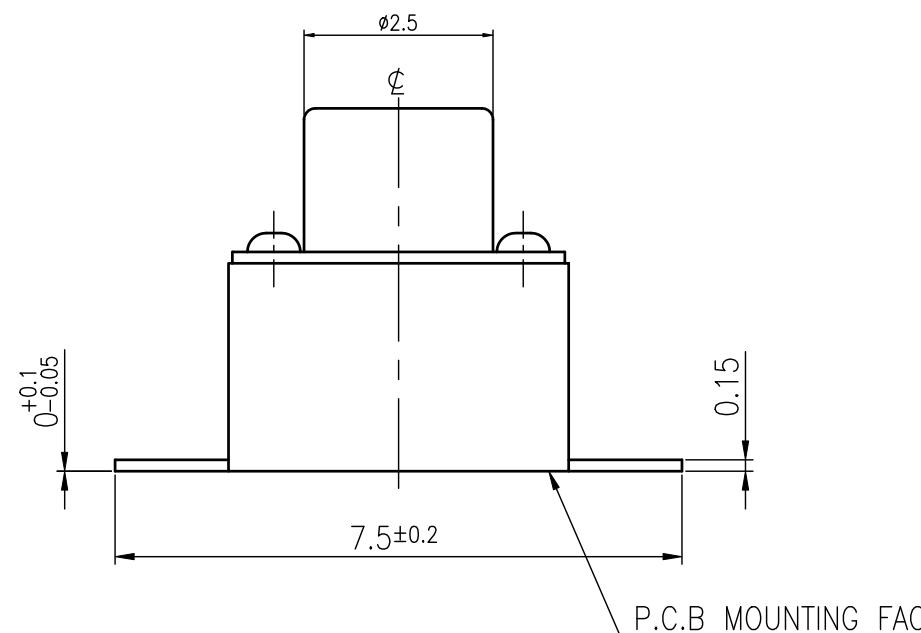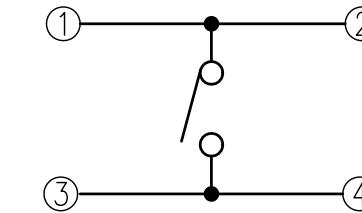


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen		
			CHECKED			
	UNIT	SCALE	REVIEWED	<i>Landry Su</i>	2019.01.10	TITLE TACT SWITCH
	mm	10/1	APPROVALS	<i>Qiuyuan Chuang</i>	2019.01.10	

TAIWAN MISAKI ELECTRONICS CO., LTD.

# THE PACKING SPECIFICATIONS

RoHS Compliant

## 1. STRUCTURE AND MATERIALS

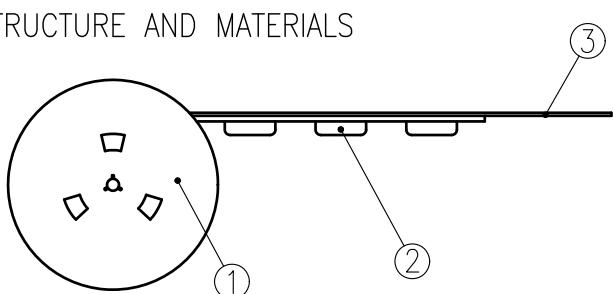

NO.	PARTS NAME	MATERIALS
(3)	COVER TAPE	POLYESTER
(2)	CARRIER TAPE	POLYSTYRENE
(1)	REEL	POLYSTYRENE

2. PACKAGING QUANTITY : 1,000 PCS/REEL

3. MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.




4. SHORTAGE LESS THAN 10 PCS A REEL IS ACCEPTABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.

5. STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN  $165^\circ \sim 180^\circ$ .

6. THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.

7. TAPE AND REEL PER EIA-481.

8. DIMENSIONS :

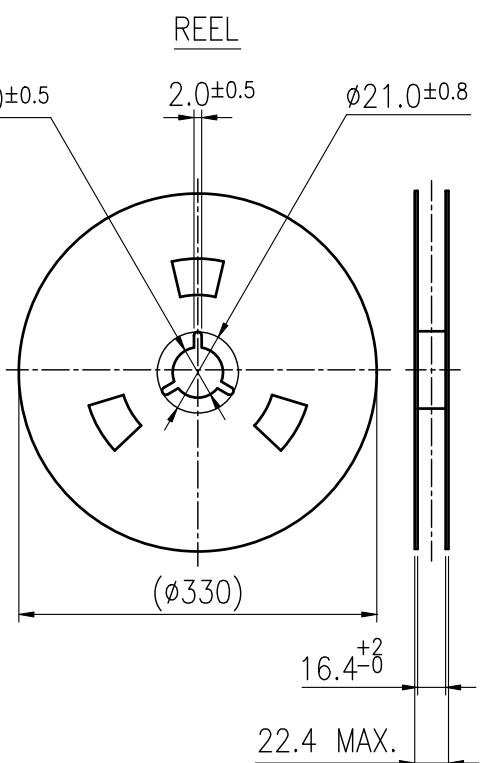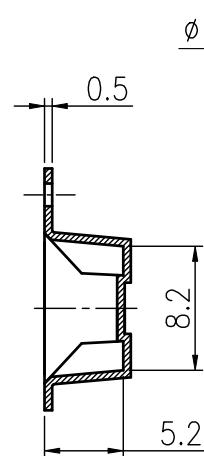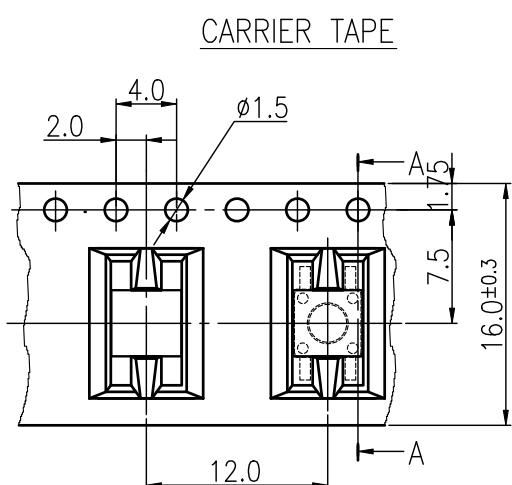


DRAWING DIRECTION

SECTION A A

COVER TAPE

Qiu Yuan Chuang

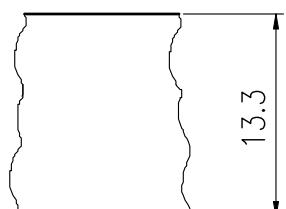

SYN	DESCRIPTION	DATE	APPROVED	APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
								NTC015-A 1(G,J)-C
							Jane Shen	PAGINATE. 1/1
								SPEC NO. P-529