

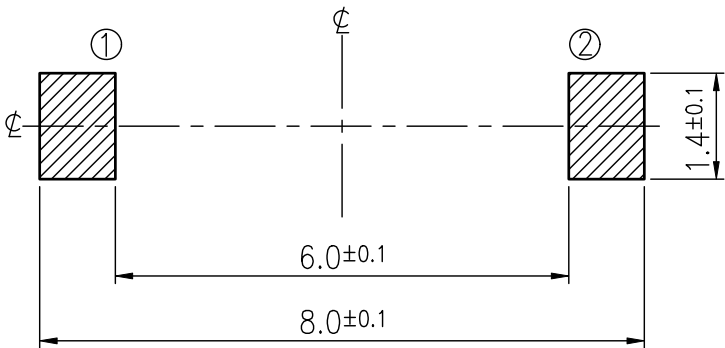

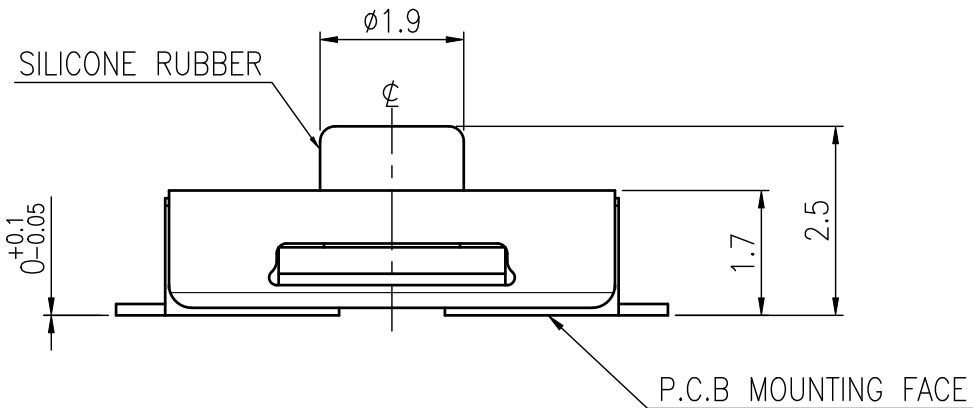



RoHS Compliant

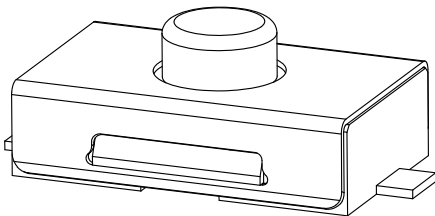

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2019.08.22	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC32V 50mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)			
INSULATION RESISTANCE		DC100V-1000MΩ MIN.		STROKE (ANGLE)			
WITHSTAND VOLTAGE		AC250V-1 MINUTE.		LIFE		100,000 CYCLES	
REMARKS:							

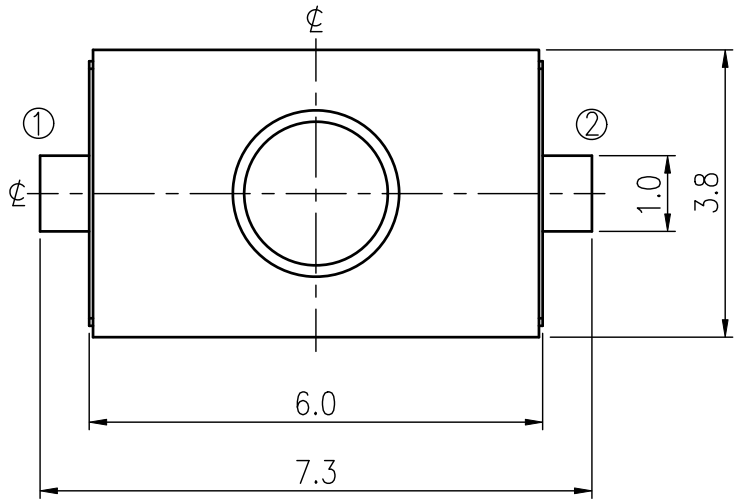

HATCHED AREA SHOWS SOLDERING LAND

MODEL NO.	OPERATING FORCE	STROKE
ETC019-BB1G-25200T	200±50gf	0.3±0.15
ETC019-BB1G-25300T	300±75gf	0.35±0.15


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES		DATE	MODEL	
			DRAWER	Jane Shen	2019.08.22	TITLE TACT SWITCH	
			CHECKED	<i>Landry Su</i>	2019.08.22		
	UNIT mm	SCALE 10/1	REVIEWED			NO. SEE MODEL NO.	
			APPROVALS	<i>Qiuyuan Chuang</i>	2019.08.22		

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS

RoHS Compliant


1.STRUCTURE AND MATERIALS

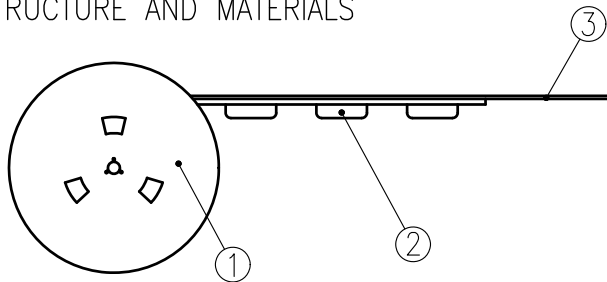

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS


- PACKAGING QUANTITY : 3,000 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180° .
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

CARRIER TAPE

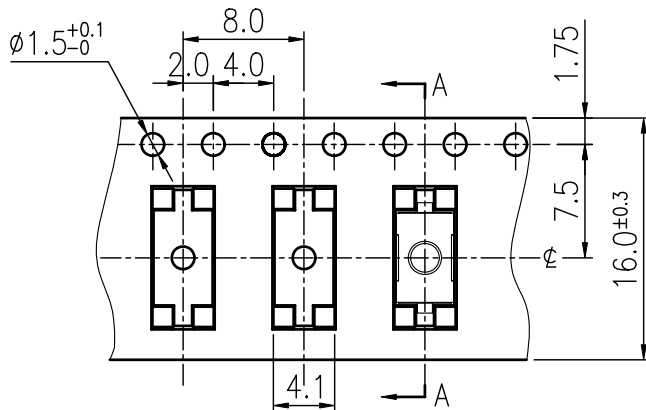


DRAWING DIRECTION

COVER TAPE



REEL

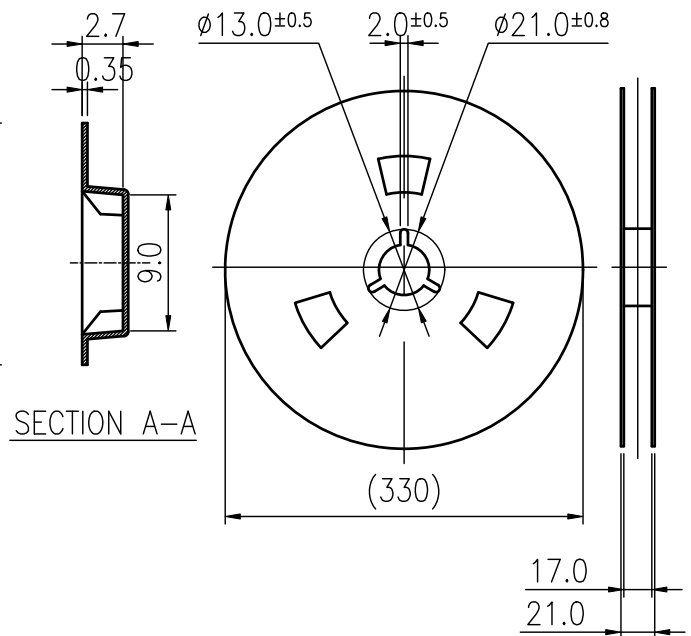

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
							Jane Shen	NTC 019-BB1G-25
							2016.11.15	PAGINATE.
								1/1
								SPEC NO.
								P-78
SYM	DISCRIPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.