




RoHS Compliant

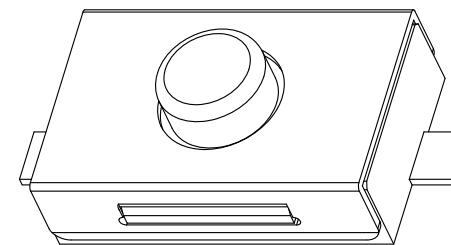




REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2019.08.22	Jane Shen	c			
B				D			
SPECIFICATIONS							
RATING	DC32V 50mA	TIMING					
CONTACT RESISTANCE	100mΩ MAX.	OPERATION (TORQUE)					
INSULATION RESISTANCE	DC100V-1000MΩ MIN.	STROKE (ANGLE)	0.15±0.1 mm				
WITHSTAND VOLTAGE	AC250V-1 MINUTE.	LIFE	100,000 CYCLES				
REMARKS:							

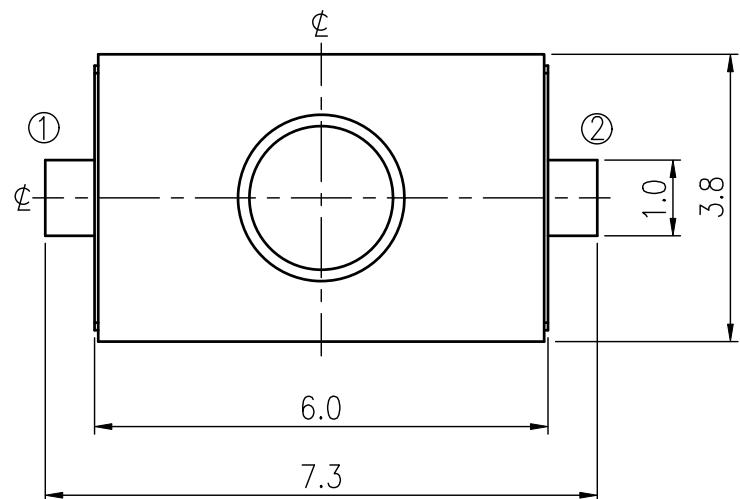

SCHEMATIC



P.C.B. LAYOUT

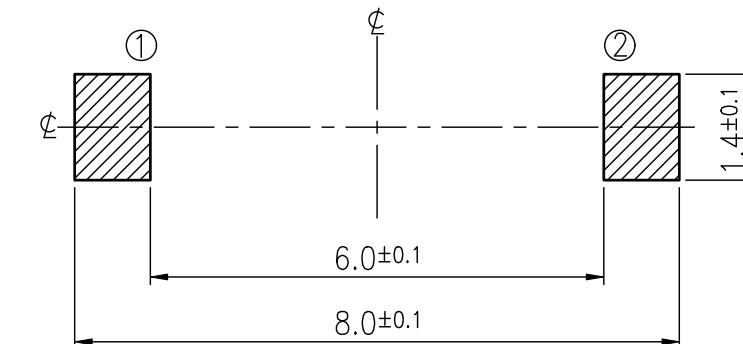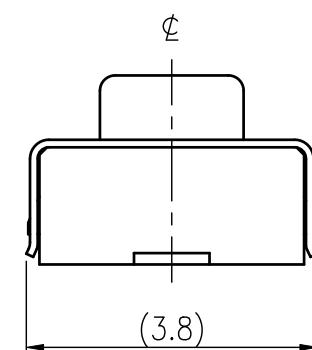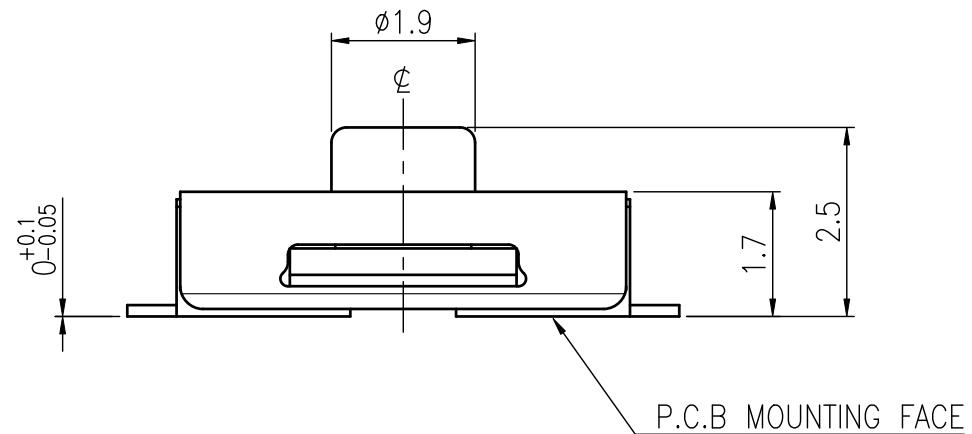

HATCHED AREA SHOWS SOLDERING LAND

MODEL NO.	OPERATING FORCE
ETC019-BB1G-A160T	160±50gf
ETC019-BB1G-A260T	260±70gf


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES	DATE	MODEL	
			DRAWER	Jane Shen	TITLE TACT SWITCH	
CHECKED <i>Landry Su</i>			2019.08.22			
REVIEWED	UNIT mm	SCALE 10/1	APPROVALS QIUYUAN CHUANG	2019.08.22		

TAIWAN MISAKI ELECTRONICS CO., LTD.

# THE PACKING SPECIFICATIONS


RoHS Compliant

## 1. STRUCTURE AND MATERIALS

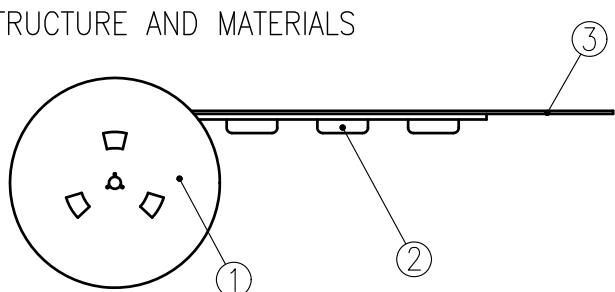

NO.	PARTS NAME	MATERIALS
③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE

- PACKAGING QUANTITY : 3,000 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCEPTABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180°.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

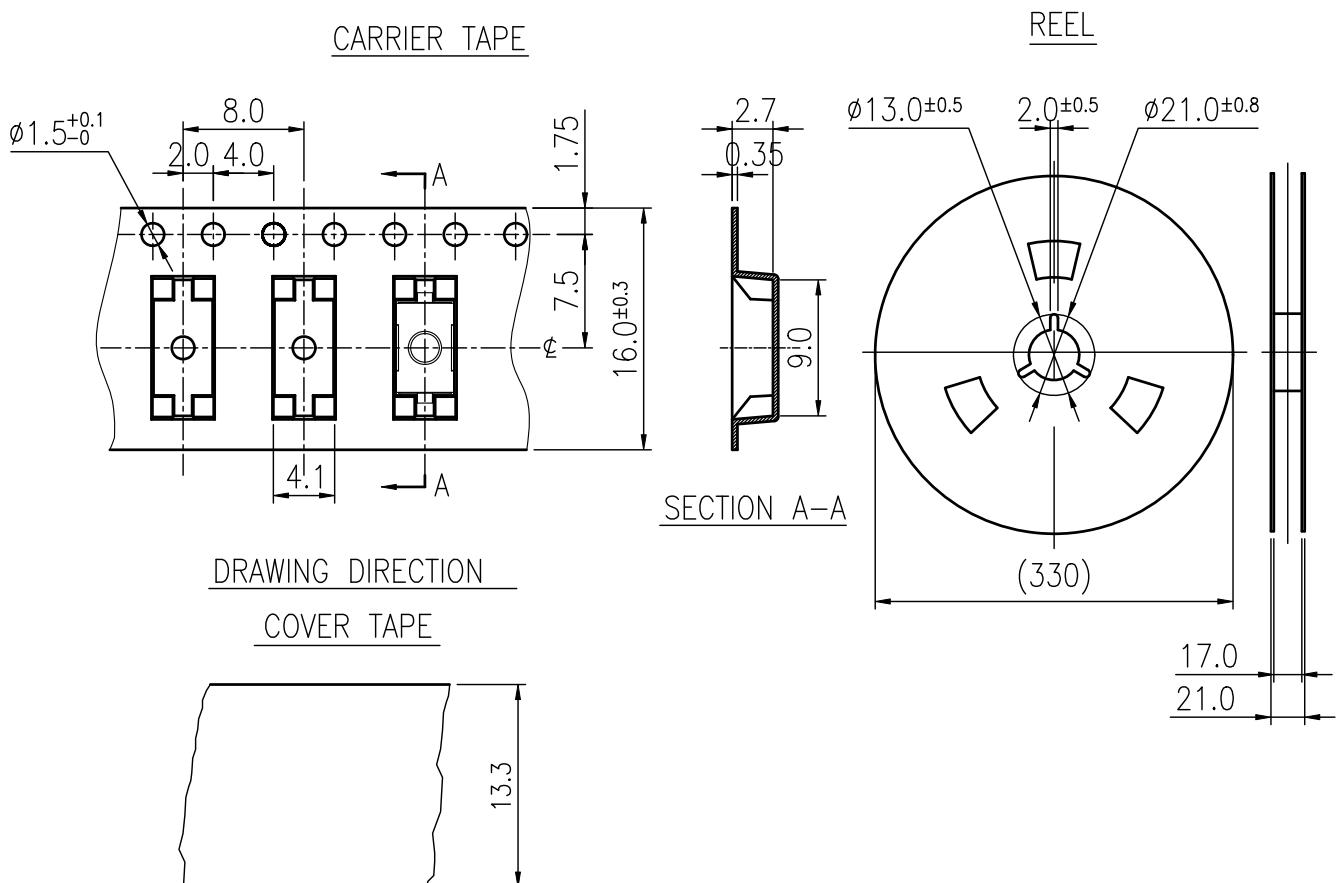

SYM	DESCRIPTION	DATE	APPROVED	APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
								NTC019-BB1(J,G)
							Jane Shen 2016.11.15	PAGINATE. 1/1
								SPEC NO. P-78