




RoHS Compliant

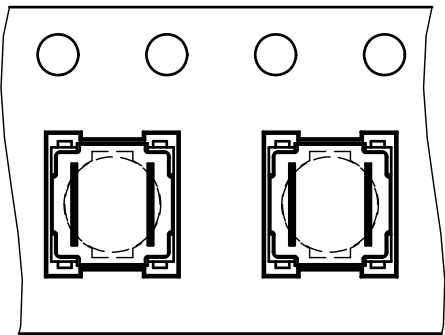

CARRIER TAPE



SHAPE OF KEYING TIP

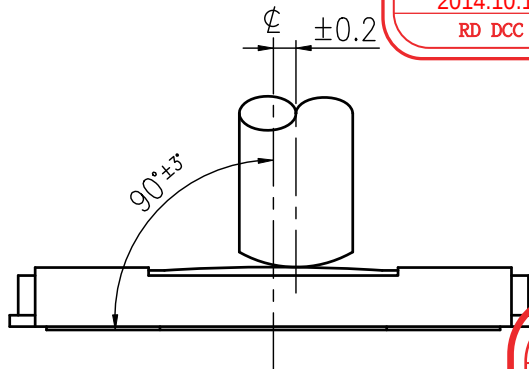

RESTRICTION IN OPERATION






T-MEC
TAIWAN MISAKI ELECTRONICS CO., LTD.
ISSUED
2014.10.15
RD DCC

T-MEC
作廢章
2015.05.11
文管中心 TW


REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2013.07.03	Ken Lin	C			
B	Change Drawing	2014.10.14	Jane Shen	D			

SPECIFICATIONS			
RATING	DC12V 50mA	TIMING	
CONTACT RESISTANCE	100mΩ MAX.	OPERATION (TORQUE)	260±50 gf $\triangle_B$
INSULATION RESISTANCE	DC500V-100MΩ MIN.	STROKE (ANGLE)	0.2 $\pm$ 0.15 mm
WITHSTAND VOLTAGE	AC250V-1 MINUTE	CONTACT RESISTANCE	2Ω MAX.
REMARKS:		(AFTER 200,000 CYCLES LIFE TEST)	

SCHEMATIC

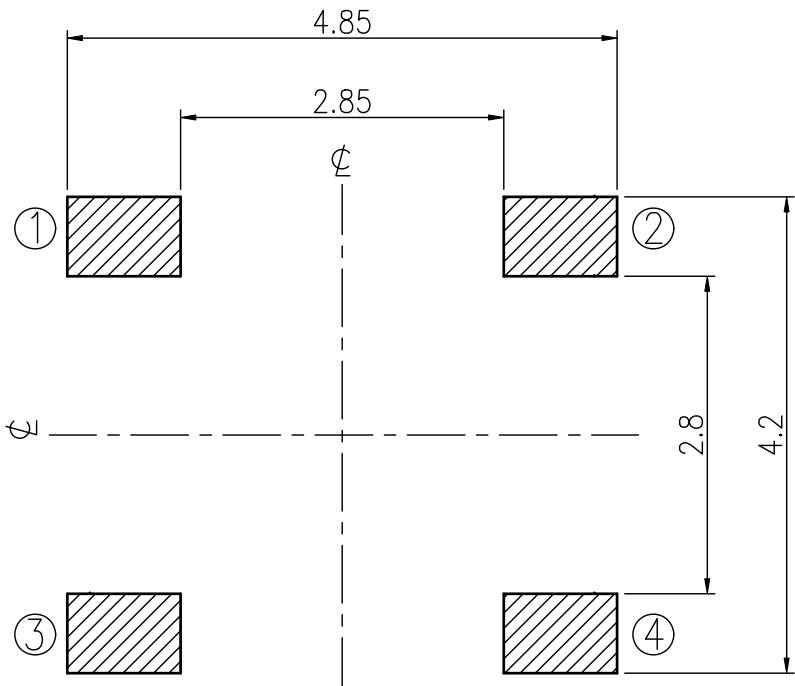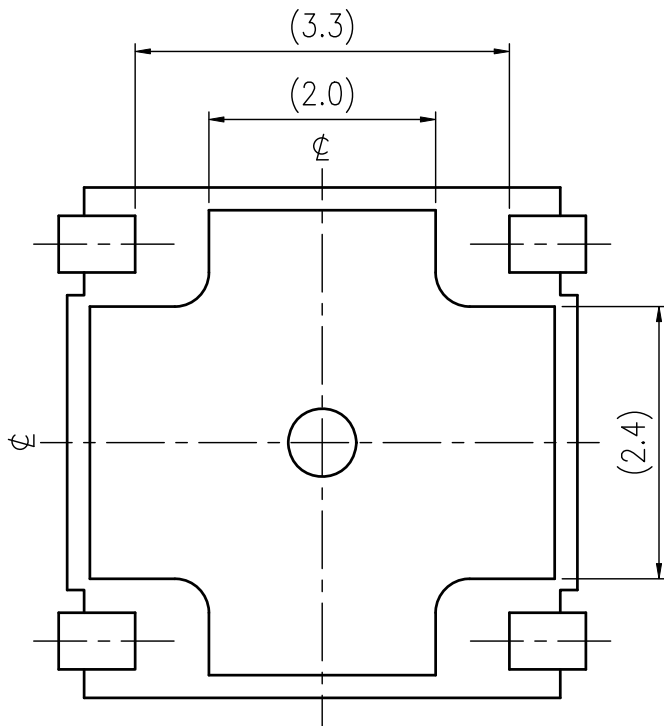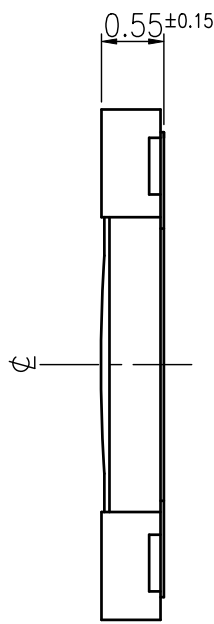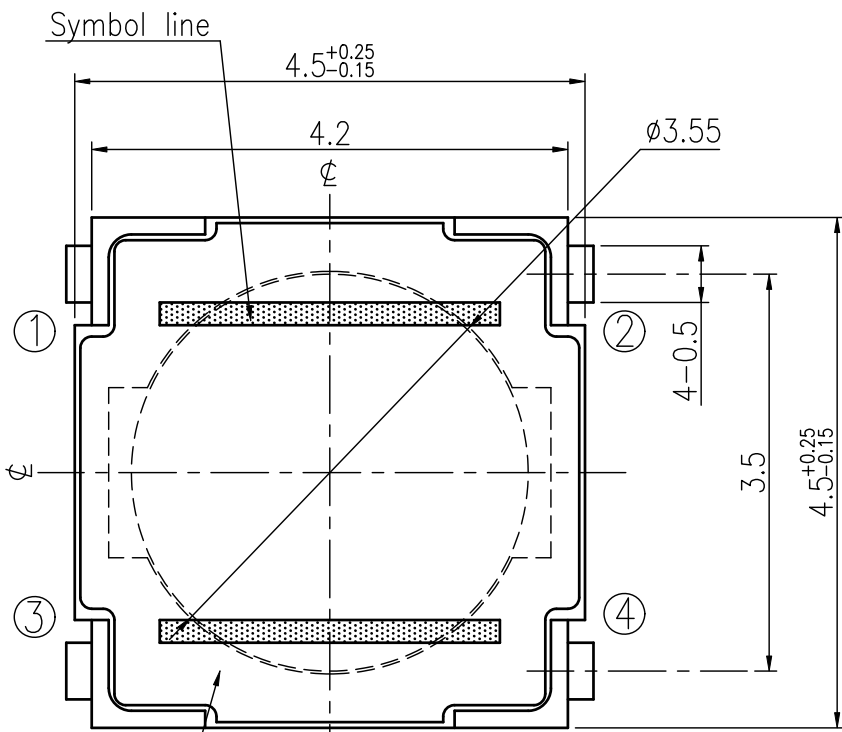

REFERENCE LAND FORM

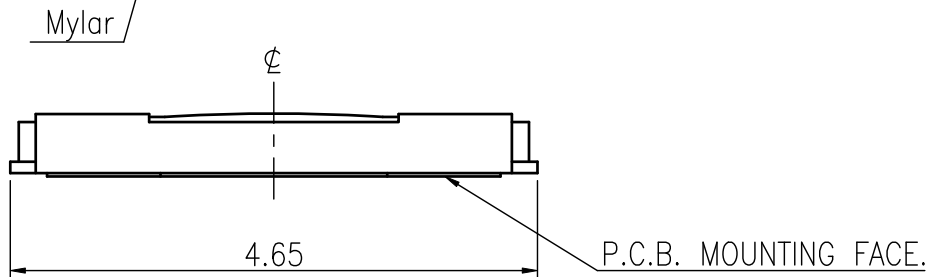

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1	SIGNATURES		DATE	MODEL
	DRAWER	Jane Shen	2014.10.15	TITLE TACT SWITCH
	CHECKED	Jamie Li	2014.10.15	
	UNIT	mm	SCALE	15/1
	REVIEWED			
APPROVALS			Dennis Hung	2014.10.15


TAIWAN MISAKI ELECTRONICS CO., LTD.

NO. ETC033-XK1K-X260T

THE PACKING SPECIFICATIONS


RoHS Compliant

1.STRUCTURE AND MATERIALS

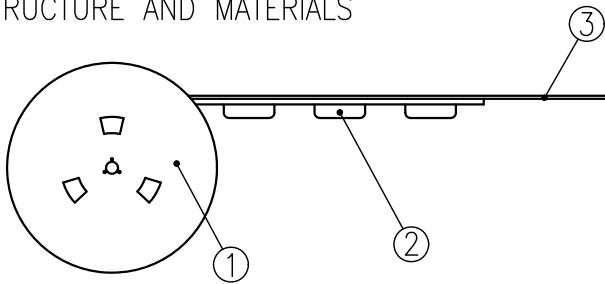

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 7,000 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCEPTABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 70 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180°.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

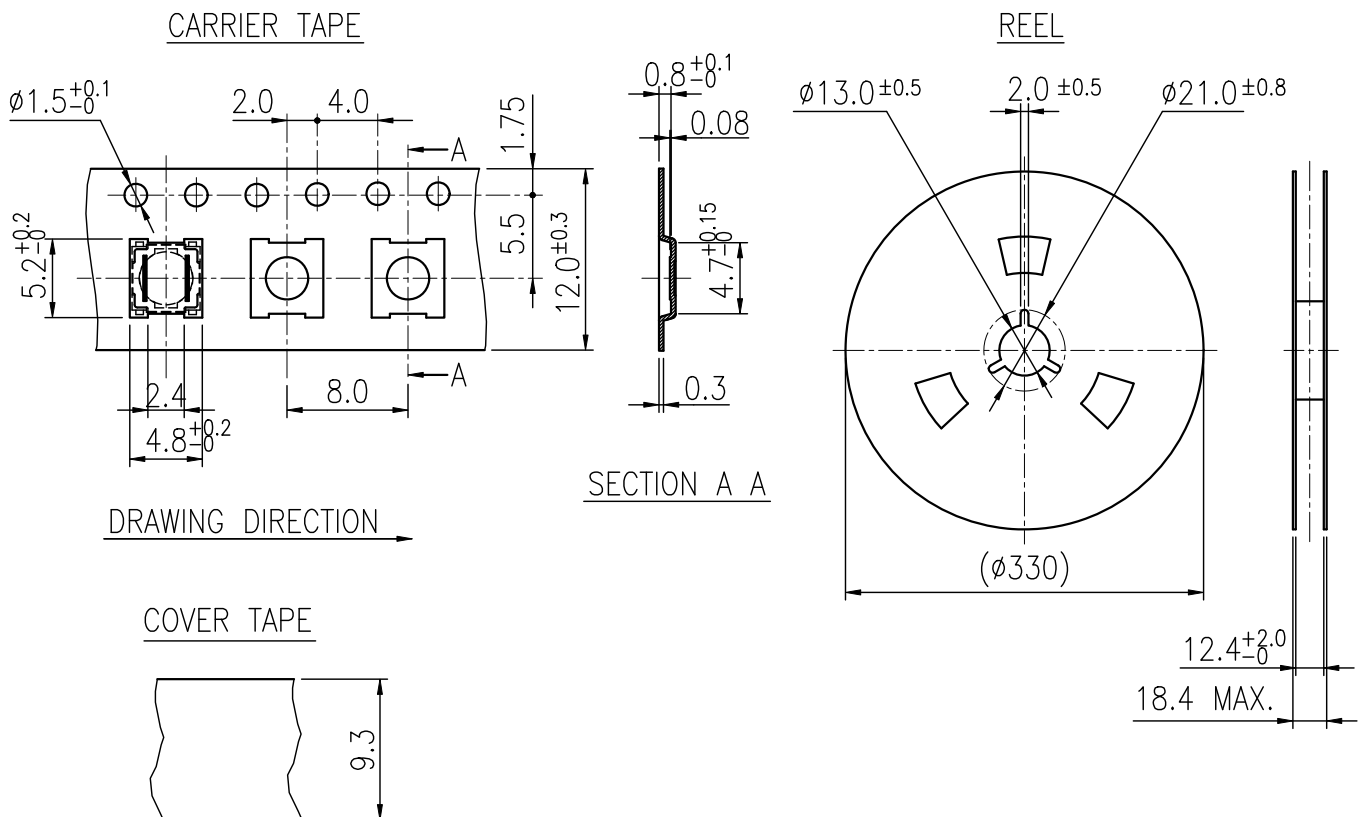

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
				Dennis Hung			Ken Lin	NTC033-XK1K-X260T
				2013.01.23			2013.01.23	PAGINATE.
								1/1
								SPEC NO.
								P-656
SYM	DISCRIPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.