




RoHS Compliant

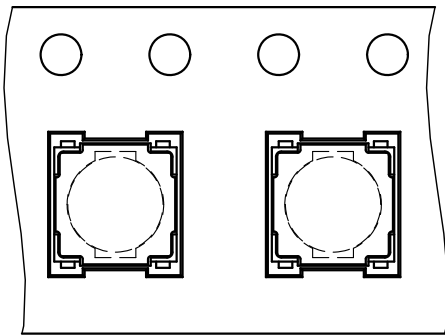

CARRIER TAPE

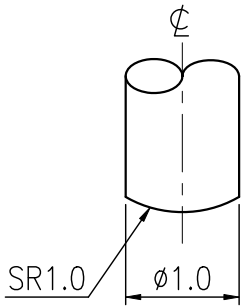


SHAPE OF KEYING TIP

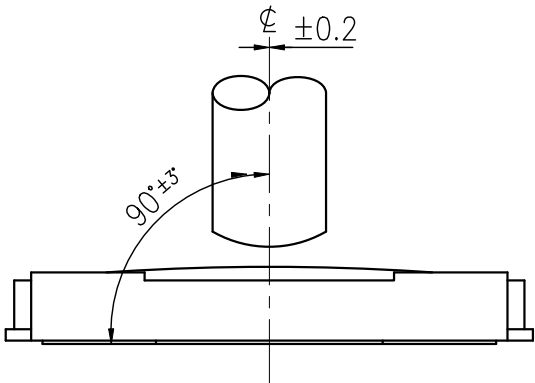





RESTRICTION IN OPERATION

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2013.08.22	Ken Lin	C			
B				D			


SPECIFICATIONS			
RATING	DC12V 50mA	TIMING	
CONTACT RESISTANCE	100mΩ MAX.	OPERATION (TORQUE)	400±70gf
INSULATION RESISTANCE	DC500V-100MΩ MIN.	STROKE (ANGLE)	0.2±0.15mm
WITHSTAND VOLTAGE	AC250V-1 MINUTE	CONTACT RESISTANCE	2Ω MAX.
REMARKS:		(AFTER 300,000 CYCLES LIFE TEST)	

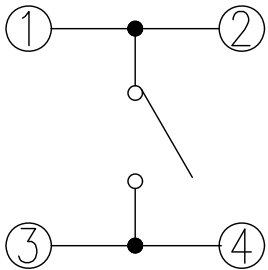

SCHEMATIC

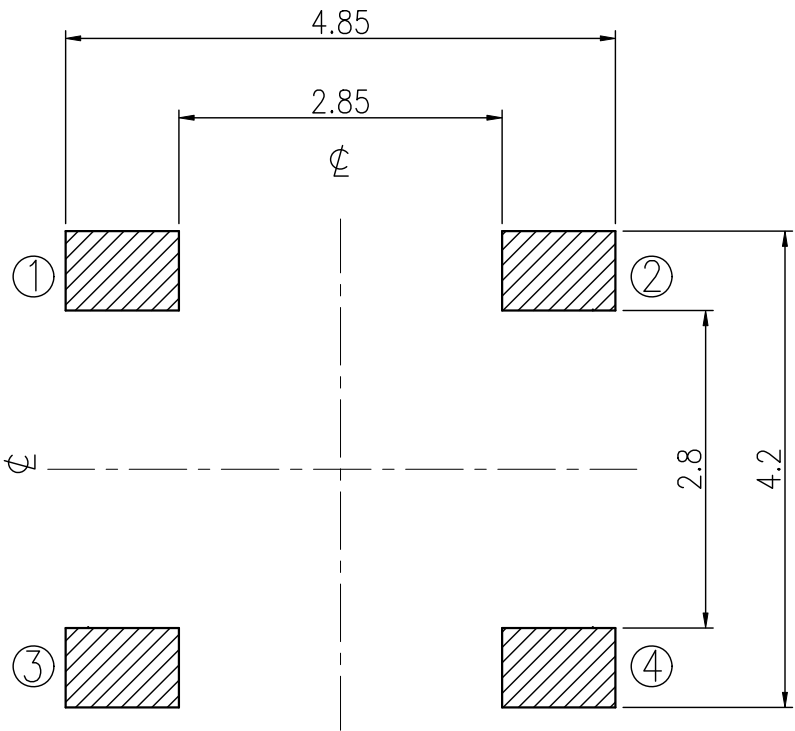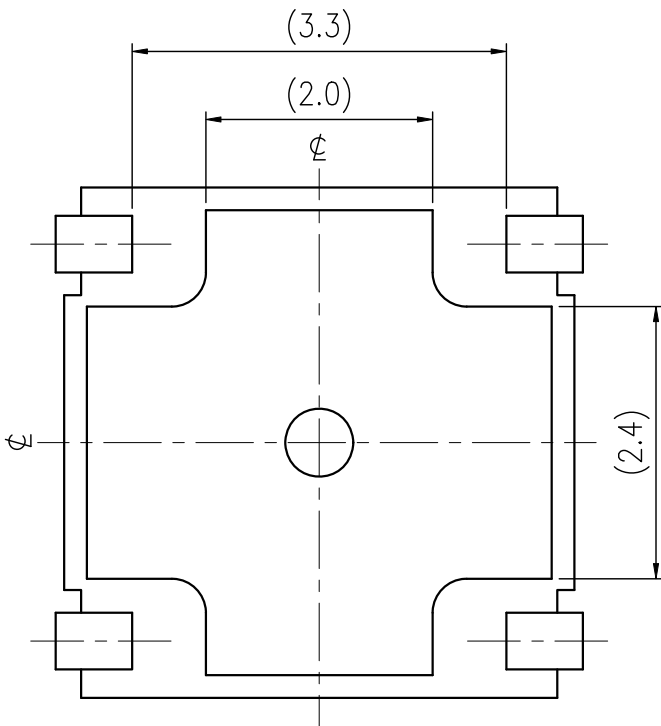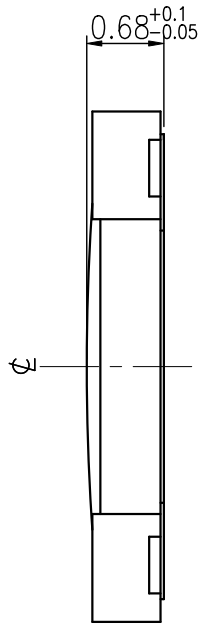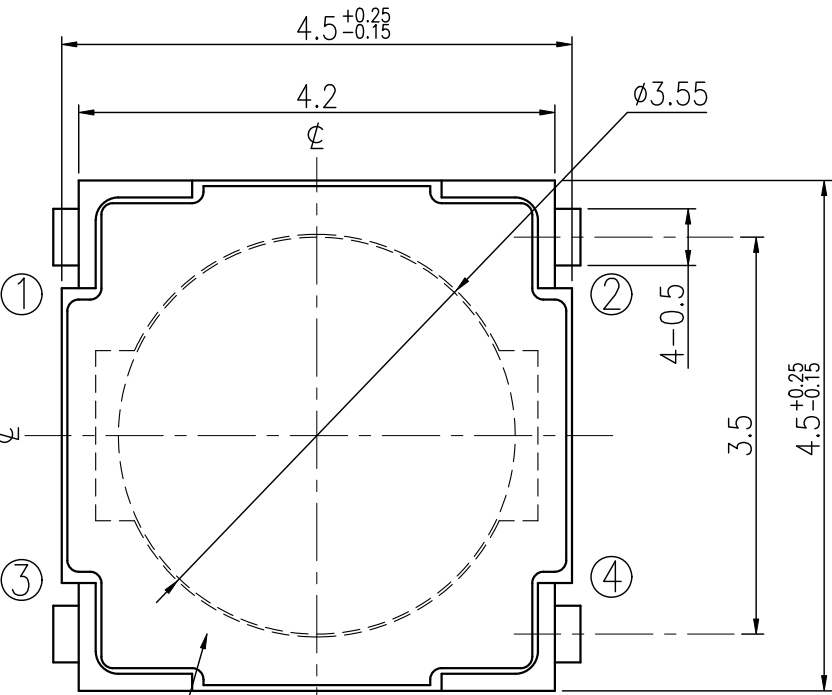

REFERENCE LAND FORM

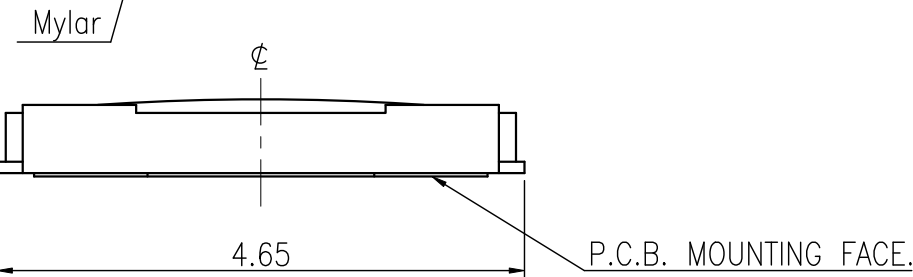


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES		DATE	MODEL
			DRAWER	Ken Lin	2013.08.22	TITLE
			CHECKED			TACT SWITCH
			REVIEWED			NO.
			APPROVALS	Dennis Hung	2013.08.22	ETC033-XY1K-X400T

TAIWAN MISAKI ELECTRONICS CO., LTD.

# THE PACKING SPECIFICATIONS

RoHS Compliant


## 1. STRUCTURE AND MATERIALS

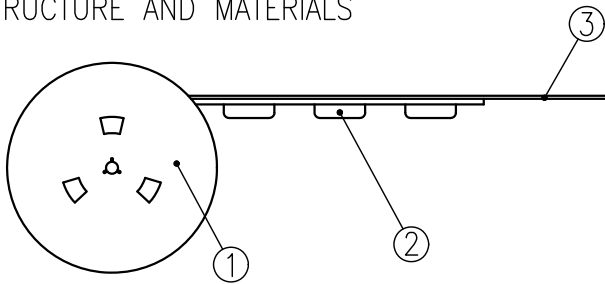


③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 7,000 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 70 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180°.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

### CARRIER TAPE

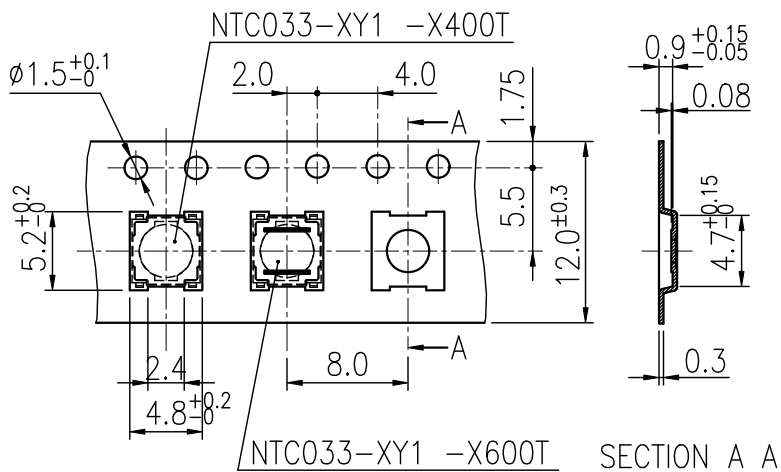


### REEL

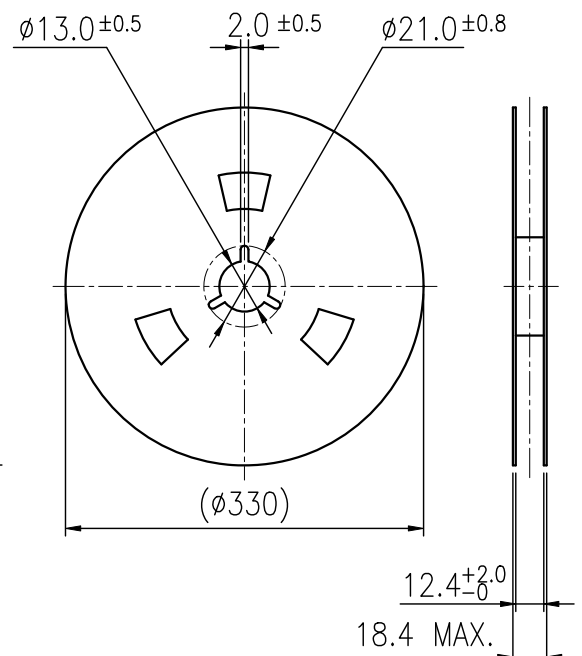

DRAWING DIRECTION →

### COVER TAPE



				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
				Dennis Hung			Ken Lin	NTC033-XY1K-X400T
				2013.01.23			2013.01.23	PAGINATE.
SYM	DISCRPTION	DATE	APPROVED					1/1
								SPEC NO.
								P-715

TAIWAN MISAKI ELECTRONICS CO.,LTD.