


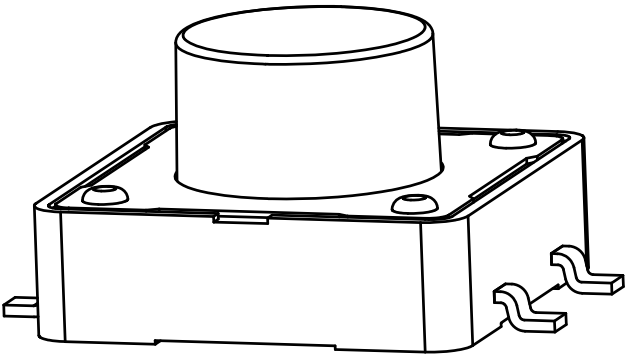
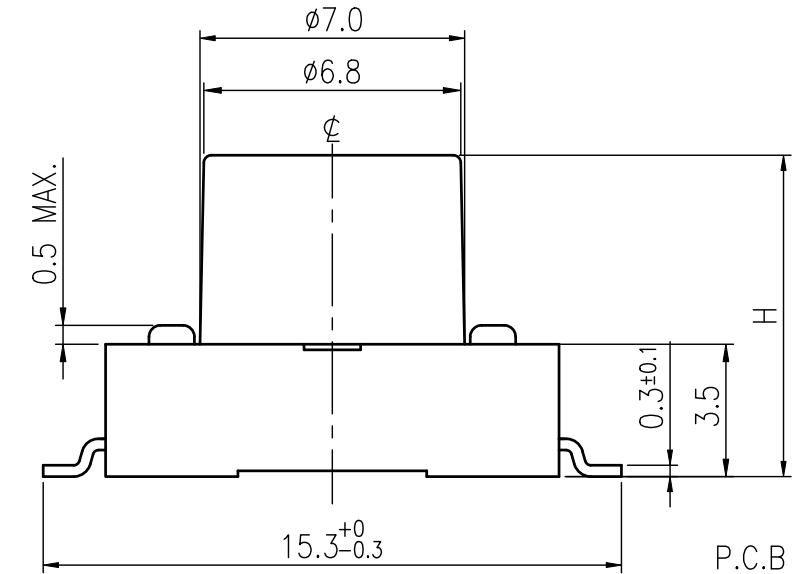
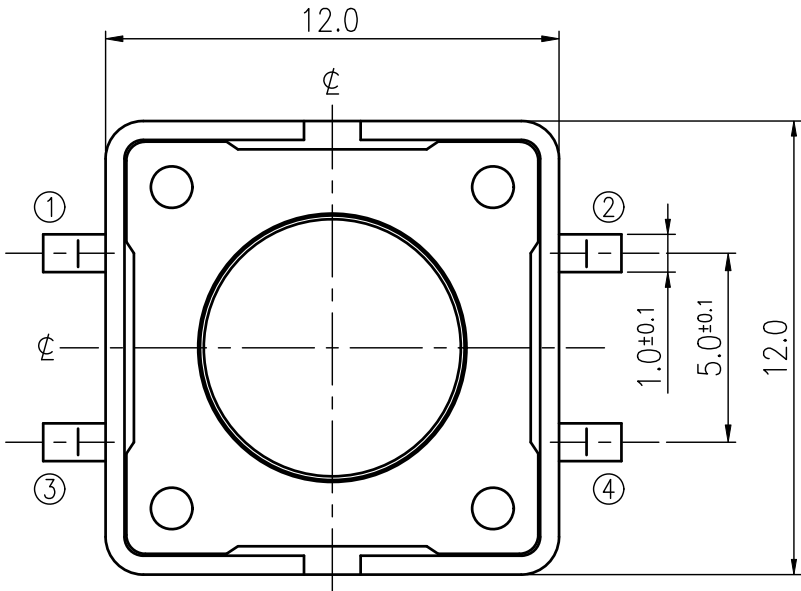


RoHS Compliant




P.C.B LAYOUT

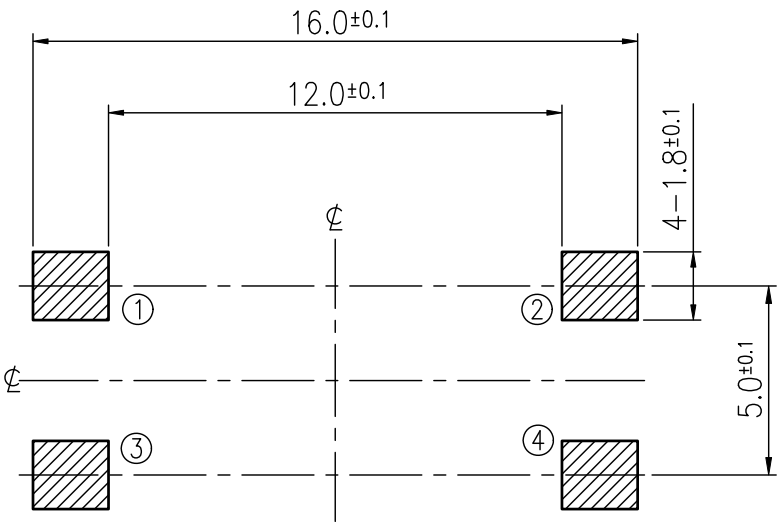

MODEL NO.	H	OPERATING FORCE	LIFE
ETC045-AD1G-B120T	4.3	120±50gf	1,000,000
ETC045-AD1G-B160T		160±50gf	500,000
ETC045-AD1G-B260T		260±70gf	300,000
ETC045-AD1G-C120T	8.5	120±50gf	1,000,000
ETC045-AD1G-C160T		160±50gf	500,000
ETC045-AD1G-C260T		260±70gf	300,000
ETC045-AD1G-G120T	7.3	120±50gf	1,000,000
ETC045-AD1G-G160T		160±50gf	500,000
ETC045-AD1G-G260T		260±70gf	300,000

P.C.B MOUNTING FACE



TERMINALS DETAIL

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2016.05.16	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)			
INSULATION RESISTANCE		DC500V - 100MΩ MIN.		STROKE (ANGLE)		0.3±0.1mm	
WITHSTAND VOLTAGE		AC250V - 1 MINUTE.		CONTACT RESISTANCE		2Ω MAX.	
REMARKS:				(AFTER		CYCLES LIFE TEST)	


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen	2016.05.16	TACT SWITCH
			CHECKED			
			REVIEWED			NO. See Model No.
			APPROVALS	Dennis Hung	2016.05.16	

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS

RoHS Compliant


1.STRUCTURE AND MATERIALS

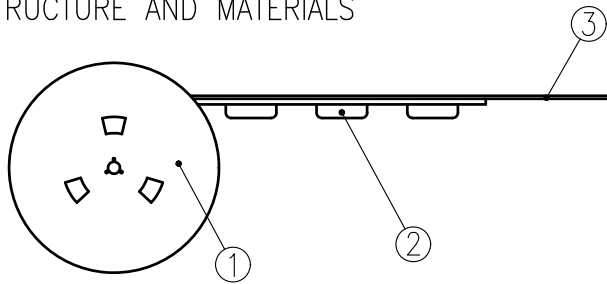



③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 400 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180° .
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

CARRIER TAPE

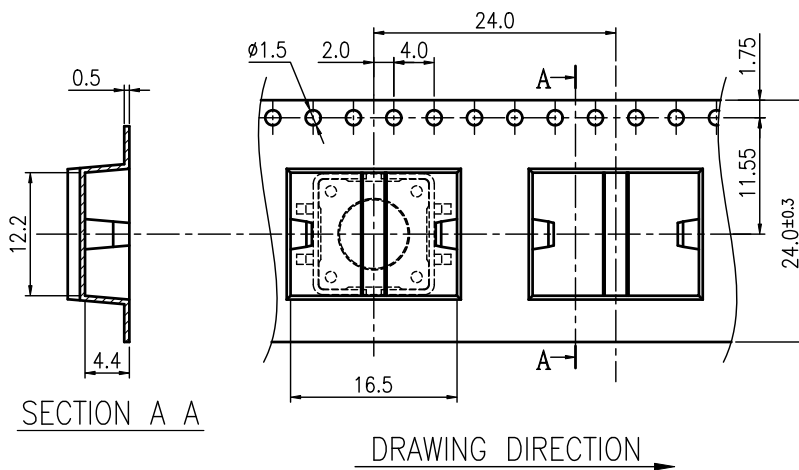

COVER TAPE

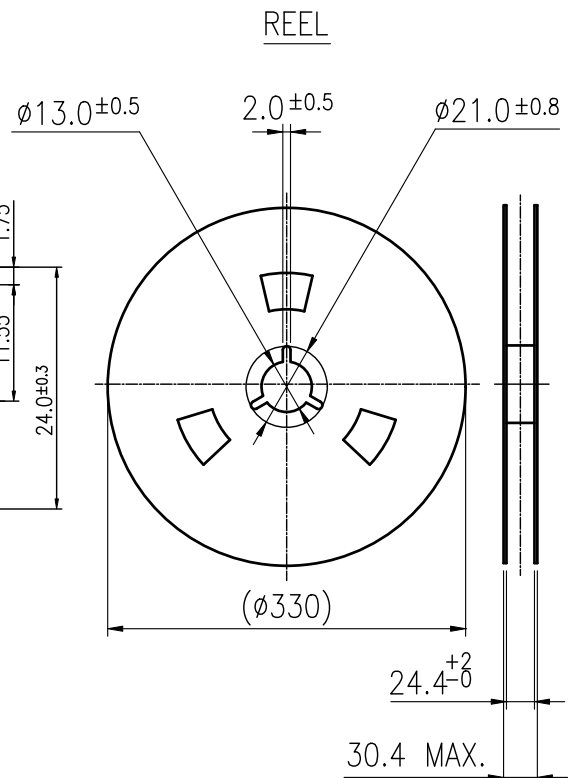

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
							Jane Shen	NTC045-AD1G-B120T
							2016.05.16	PAGINATE. 1/1
								SPEC NO. P-781
SYM	DISCRPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.