



RoHS Compliant

For Reference Only


REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2017.08.22	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC32V 50mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)		160±50 gf	
INSULATION RESISTANCE		DC100V-1000MΩ MIN.		STROKE (ANGLE)		0.5±0.25 mm	
WITHSTAND VOLTAGE		AC250V-1 MINUTE.		LIFE		300,000 CYCLES	
REMARKS:		Waterproof Grade : IP67					

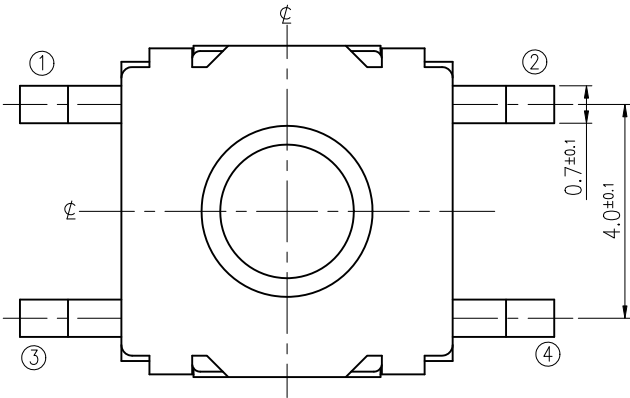



SCHEMATIC



RECOMMENDED P.C.B LAYOUT

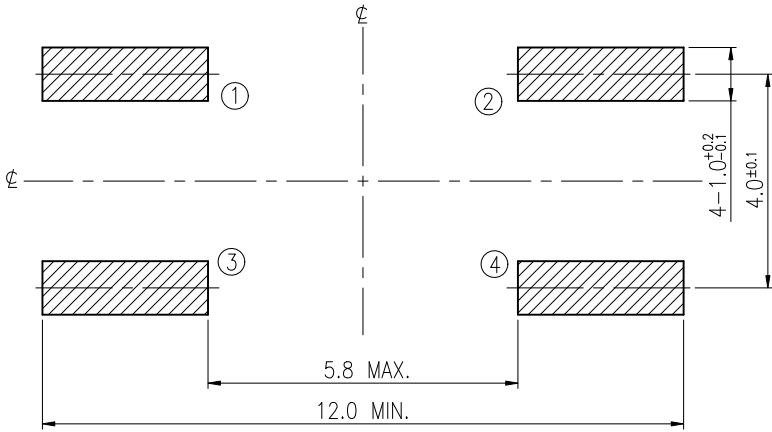

HATCHED AREA SHOWS SOLDERING LAND

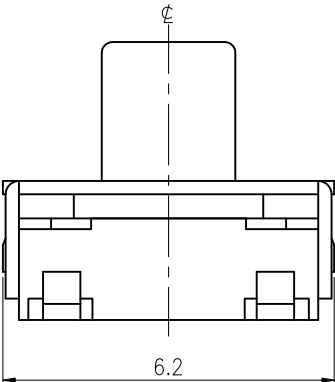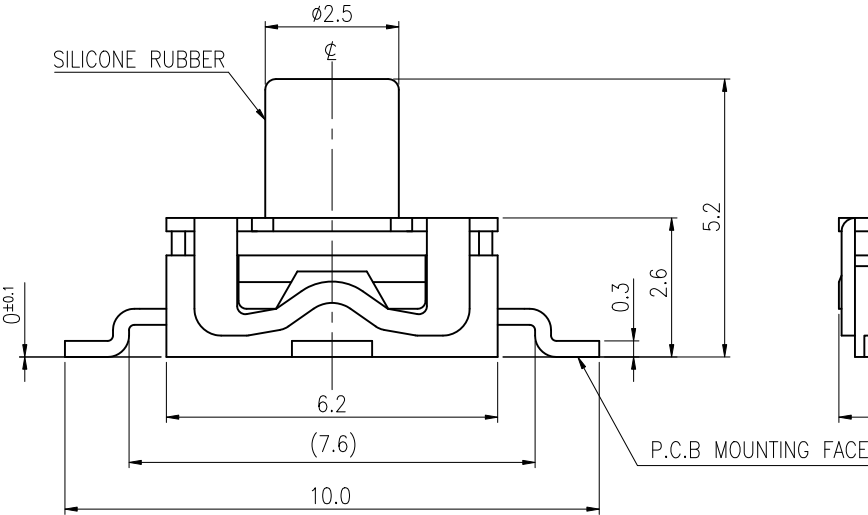


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen	2017.08.22	TITLE TACT SWITCH
			CHECKED			
	UNIT mm	SCALE 10/1	REVIEWED	Landry Ju	2017.08.22	NO. ETC202-AA1G-52160T
			APPROVALS	Dennis Hung	2017.08.22	

TAIWAN MISAKI ELECTRONICS CO., LTD.

# THE PACKING SPECIFICATIONS


RoHS Compliant

## 1.STRUCTURE AND MATERIALS

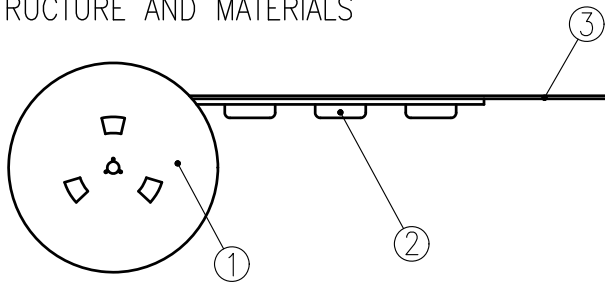

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 1,000 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180 °.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

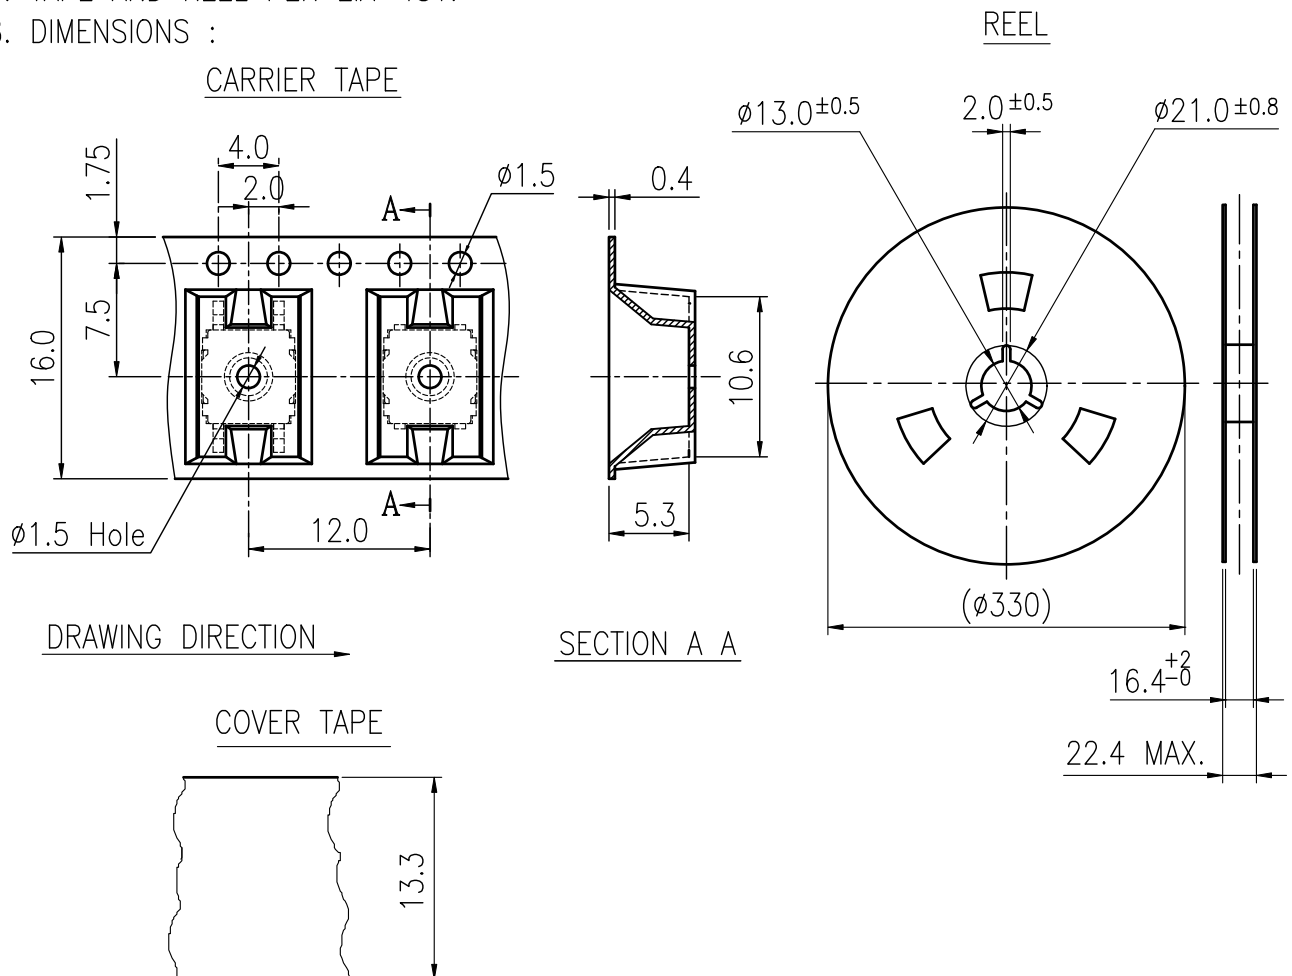

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
							Jane Shen	NTC202-AA1(G,U)-52
							2017.03.31	PAGINATE. 1/1
								SPEC NO. P-811
SYM	DISCRIPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.