
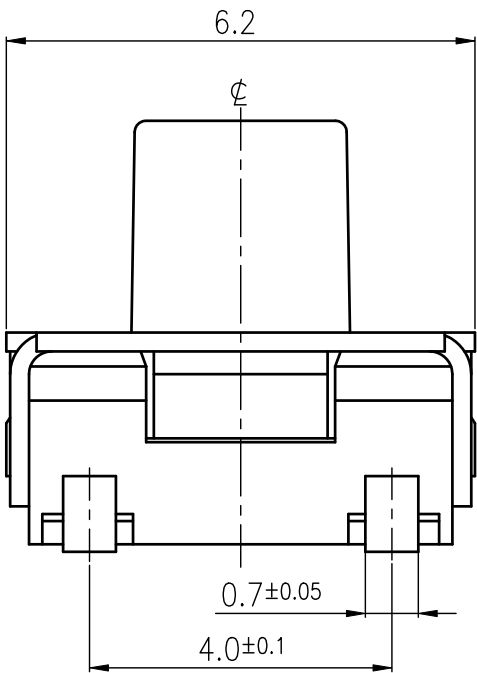
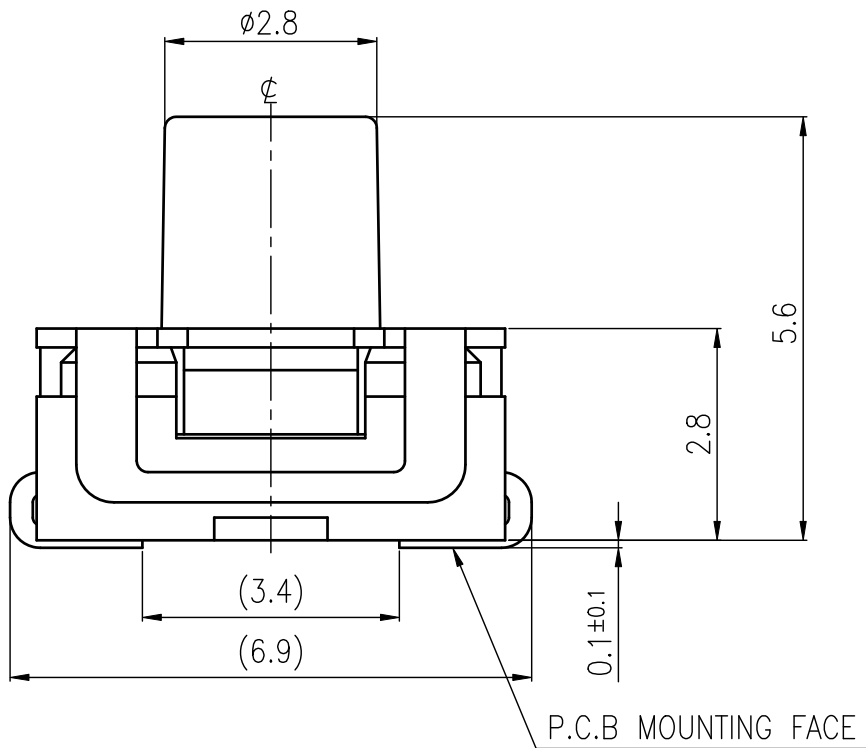


RoHS Compliant


For Reference Only

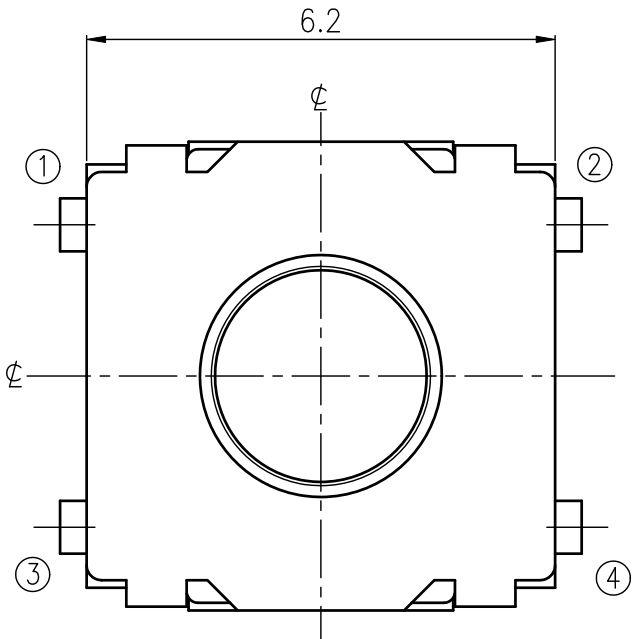


REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2017.09.14	Jane Shen	C			
B				D			

SPECIFICATIONS			
RATING	DC32V 50mA	TIMING	
CONTACT RESISTANCE	100mΩ MAX.	OPERATION (TORQUE)	200±50 gf
INSULATION RESISTANCE	DC100V-1000MΩ MIN.	STROKE (ANGLE)	0.25±0.15 mm
WITHSTAND VOLTAGE	AC250V-1 MINUTE.	LIFE	100,000 CYCLES
REMARKS:	Waterproof Grade : IP67		

SCHEMATIC



RECOMMENDED P.C.B LAYOUT

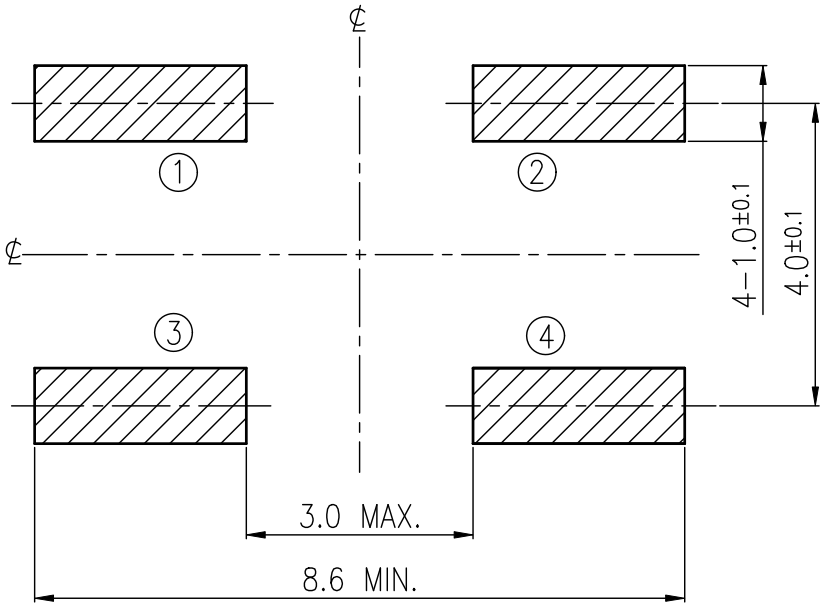

HATCHED AREA SHOWS SOLDERING LAND


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen	2017.09.14	TITLE
			CHECKED			TACT SWITCH
			REVIEWED			NO.
			APPROVALS	Dennis Hung	2017.09.14	<b>ETC202-CC1U-C200T</b>

TAIWAN MISAKI ELECTRONICS CO., LTD.

# THE PACKING SPECIFICATIONS


RoHS Compliant

## 1.STRUCTURE AND MATERIALS

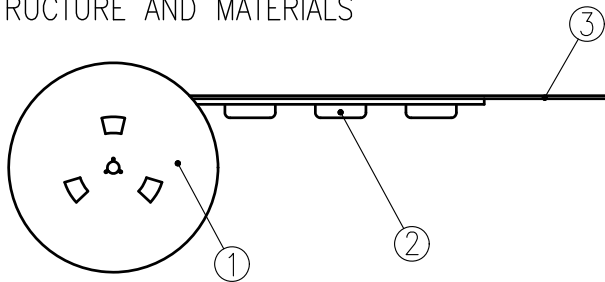

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 1,000 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180° .
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

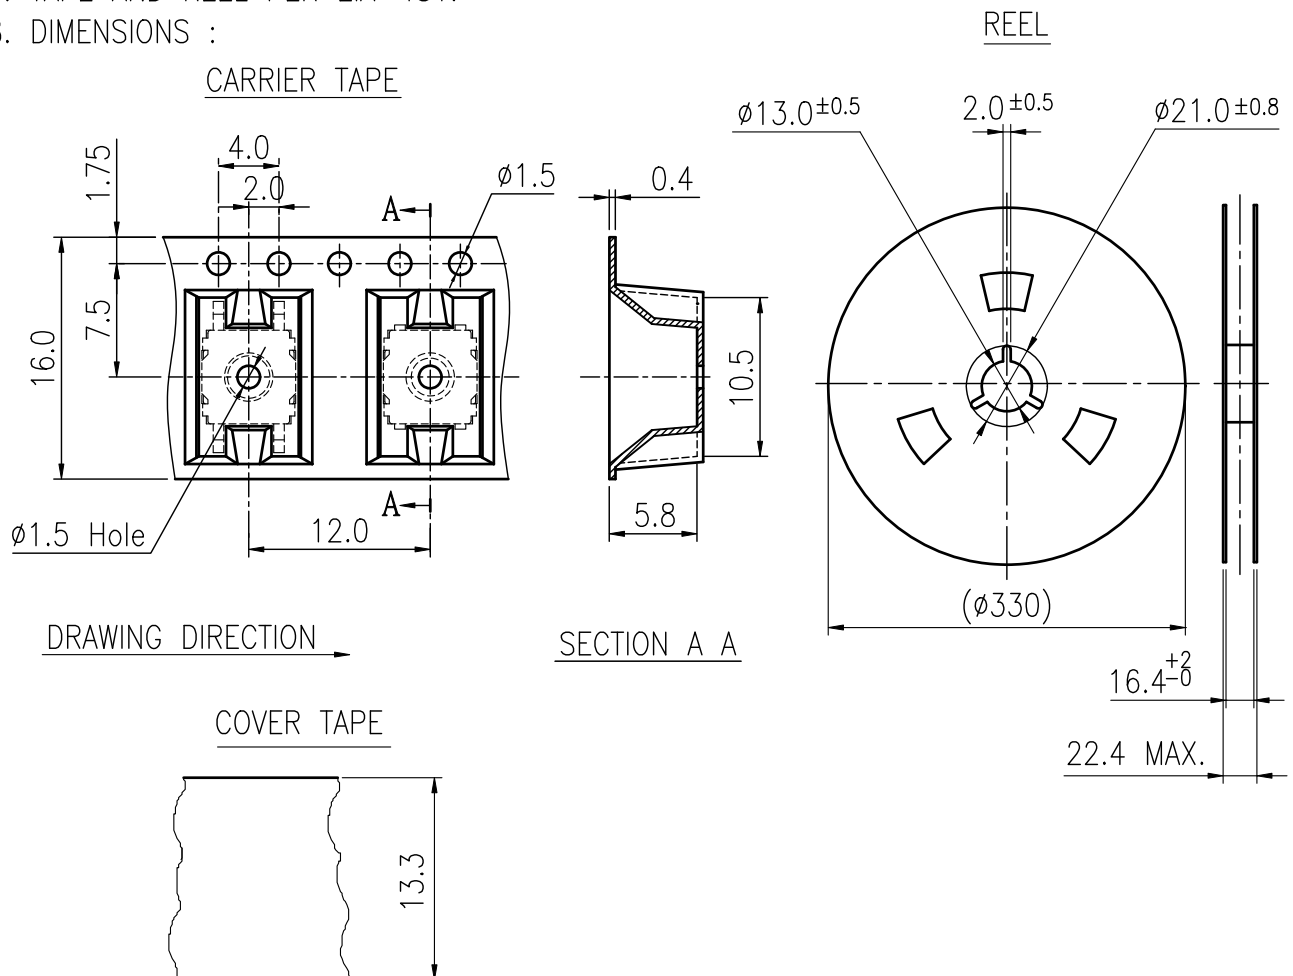

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
							Jane Shen	NTC_202-CC_(G,U)-C
							2017.10.20	PAGINATE.
								1/1
								SPEC NO.
								P-822
SYM	DISCRPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.