
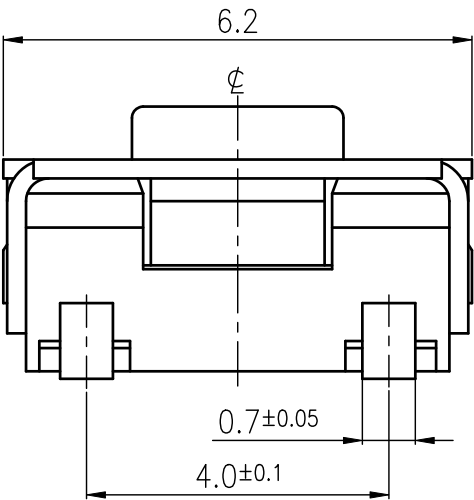
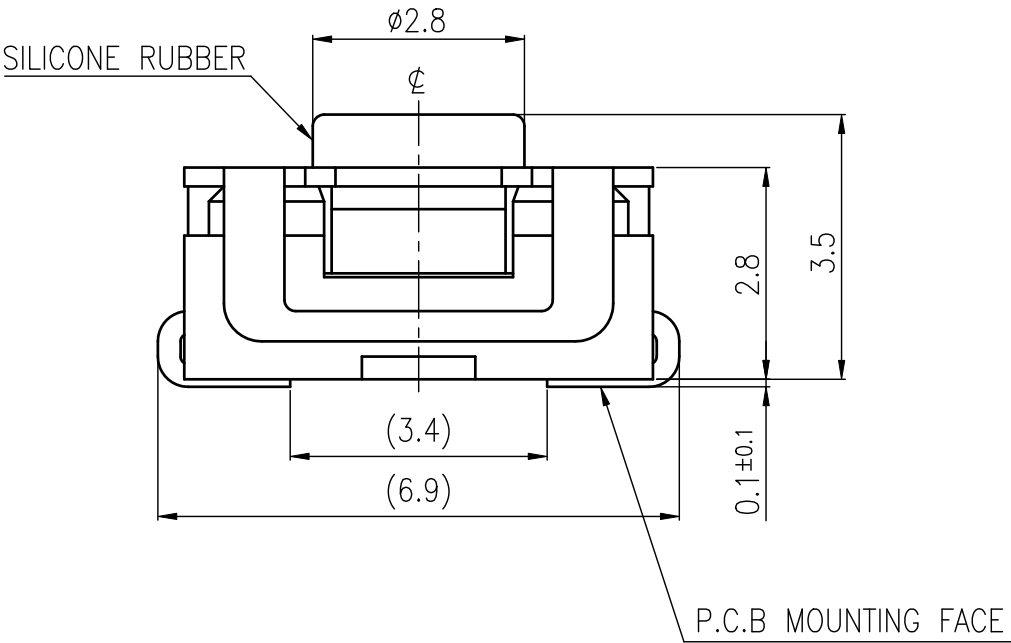


RoHS Compliant


For Reference Only

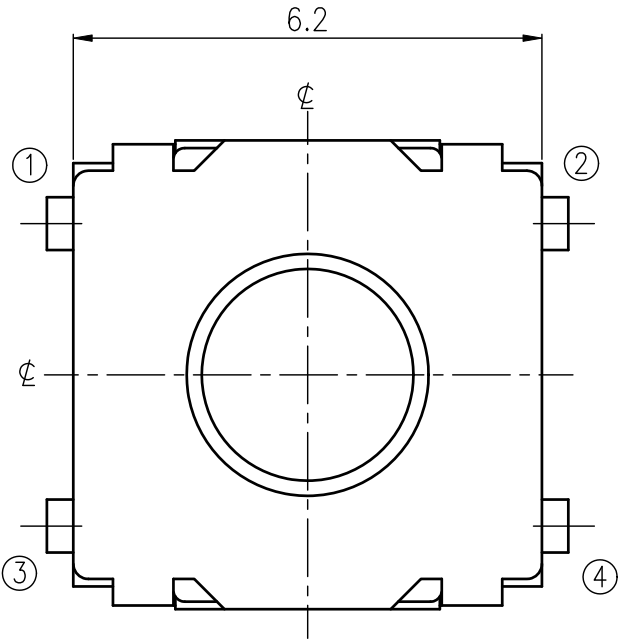


REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2017.09.14	Jane Shen	C			
B				D			

SPECIFICATIONS			
RATING	DC32V 50mA	TIMING	
CONTACT RESISTANCE	100m\Omega MAX.	OPERATION (TORQUE)	200\pm 50 gf
INSULATION RESISTANCE	DC100V-1000M\Omega MIN.	STROKE (ANGLE)	0.35\pm 0.3 mm
WITHSTAND VOLTAGE	AC250V-1 MINUTE.	LIFE	500,000 CYCLES
REMARKS:	Waterproof Grade : IP67		

SCHEMATIC



RECOMMENDED P.C.B LAYOUT

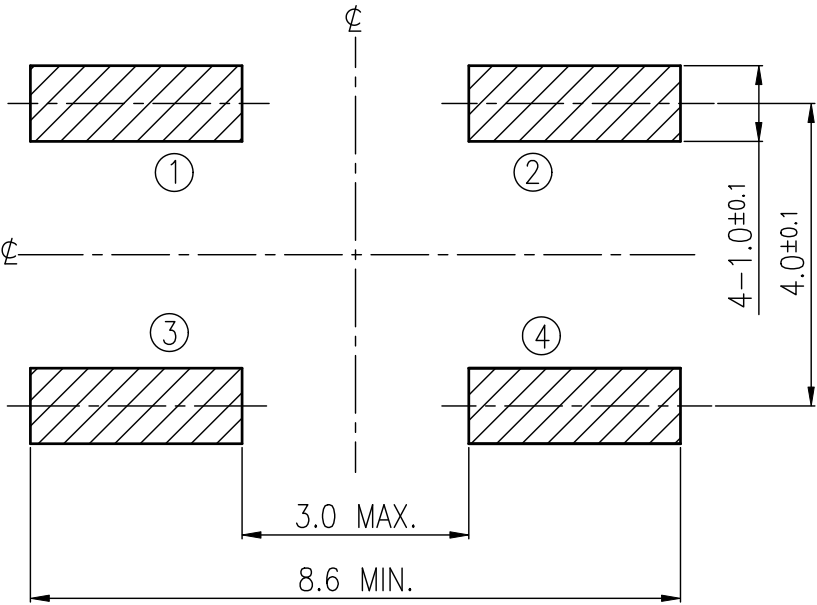

HATCHED AREA SHOWS SOLDERING LAND

TOLERANCES UNLESS OTHERWISE SPECIFIED ± 0.2			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen	2017.09.14	TITLE
			CHECKED			TACT SWITCH
			REVIEWED	Landry Su	2017.09.14	NO
			APPROVALS	Dennis Hung	2017.09.14	ETC202-CC1U-35200T

TAIWAN MISAKI ELECTRONICS CO., LTD.