

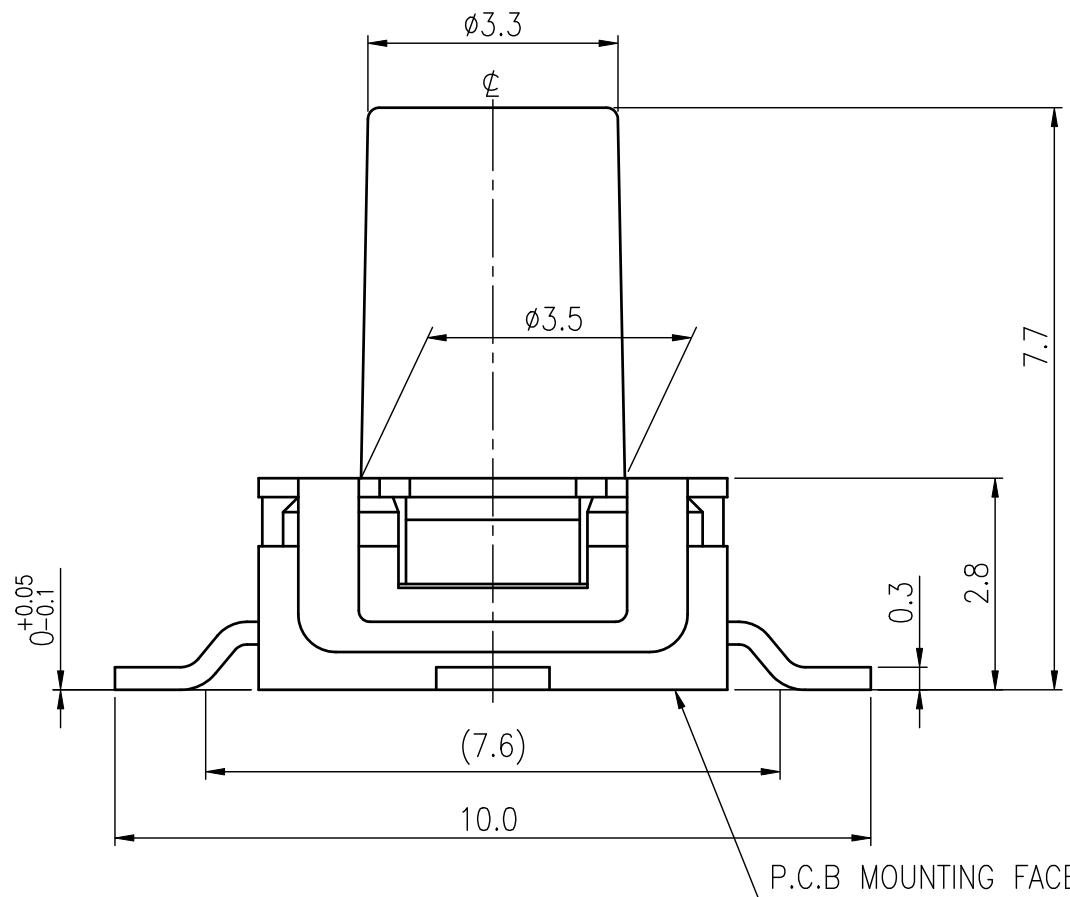



# RoHS Compliant

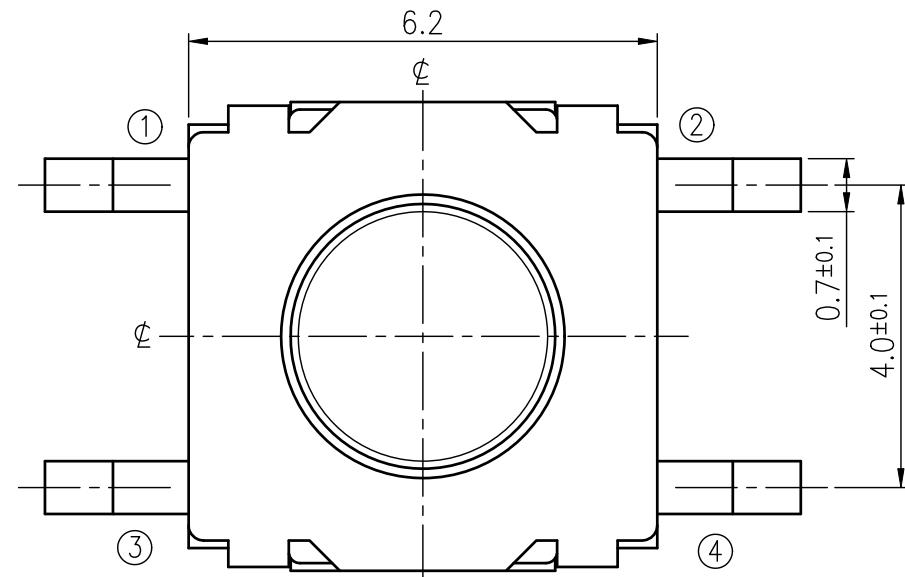

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	<u>Initial Drawing</u>	2019.02.26	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING	DC32V 50mA		TIMING				
CONTACT RESISTANCE	100mΩ MAX.		OPERATION (TORQUE)		300±80 gf		
INSULATION RESISTANCE	DC100V-1000MΩ MIN.		STROKE (ANGLE)		0.4±0.2 mm		
WITHSTAND VOLTAGE	AC250V-1 MINUTE.		LIFE		300,000 CYCLES		
REMARKS:	Waterproof Grade : IP67						

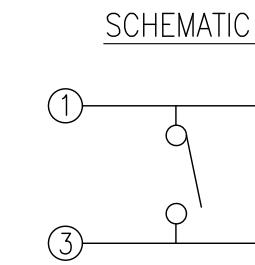

## RECOMMENDED P.C.B LAYOUT

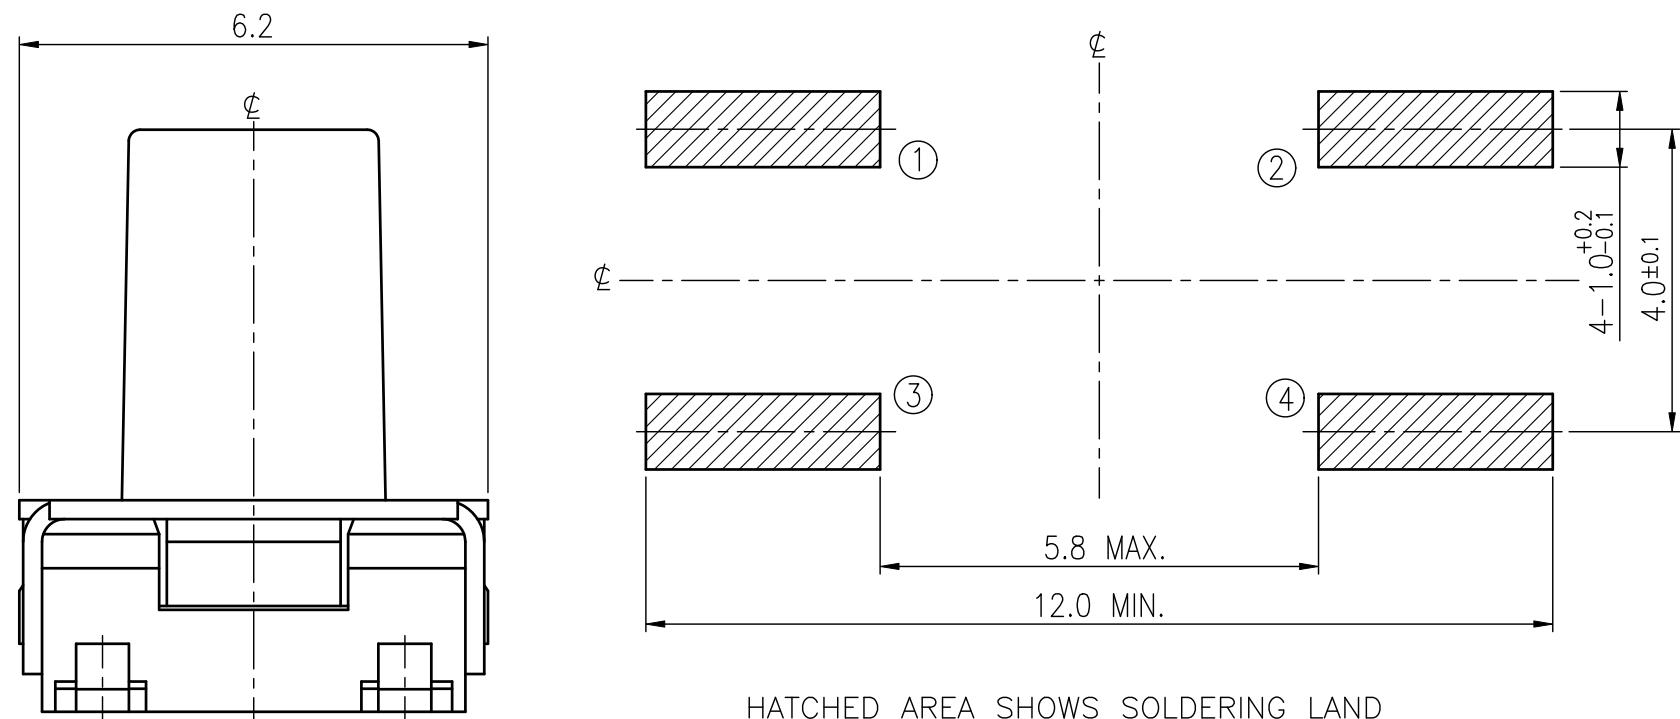

#### HATCHED AREA SHOWS SOLDERING LAND


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES		DATE	MODEL	
			DRAWER	Jane Shen	2021.07.29	TITLE	TACT SWITCH
			CHECKED	<i>Landry Su</i>	2021.07.29		
	UNIT mm	SCALE 10/1	REVIEWED			NO. <b>ETC202-CC1G-E300T-R</b>	
			APPROVALS	Qiuyuan Chuang	2021.07.29		

TAIWAN MISAKI ELECTRONICS CO., LTD.

# THE PACKING SPECIFICATIONS

RoHS Compliant

## 1. STRUCTURE AND MATERIALS

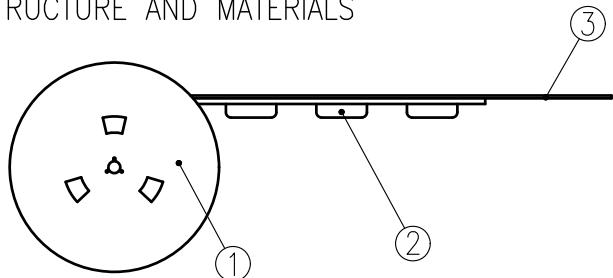

NO.	PARTS NAME	MATERIALS
③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE

2. PACKAGING QUANTITY : 700 PCS/REEL

3. MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.


4. SHORTAGE LESS THAN 10 PCS A REEL IS ACCEPTABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.

5. STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN  $165^\circ \sim 180^\circ$ .

6. THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.

7. TAPE AND REEL PER EIA-481.

8. DIMENSIONS :

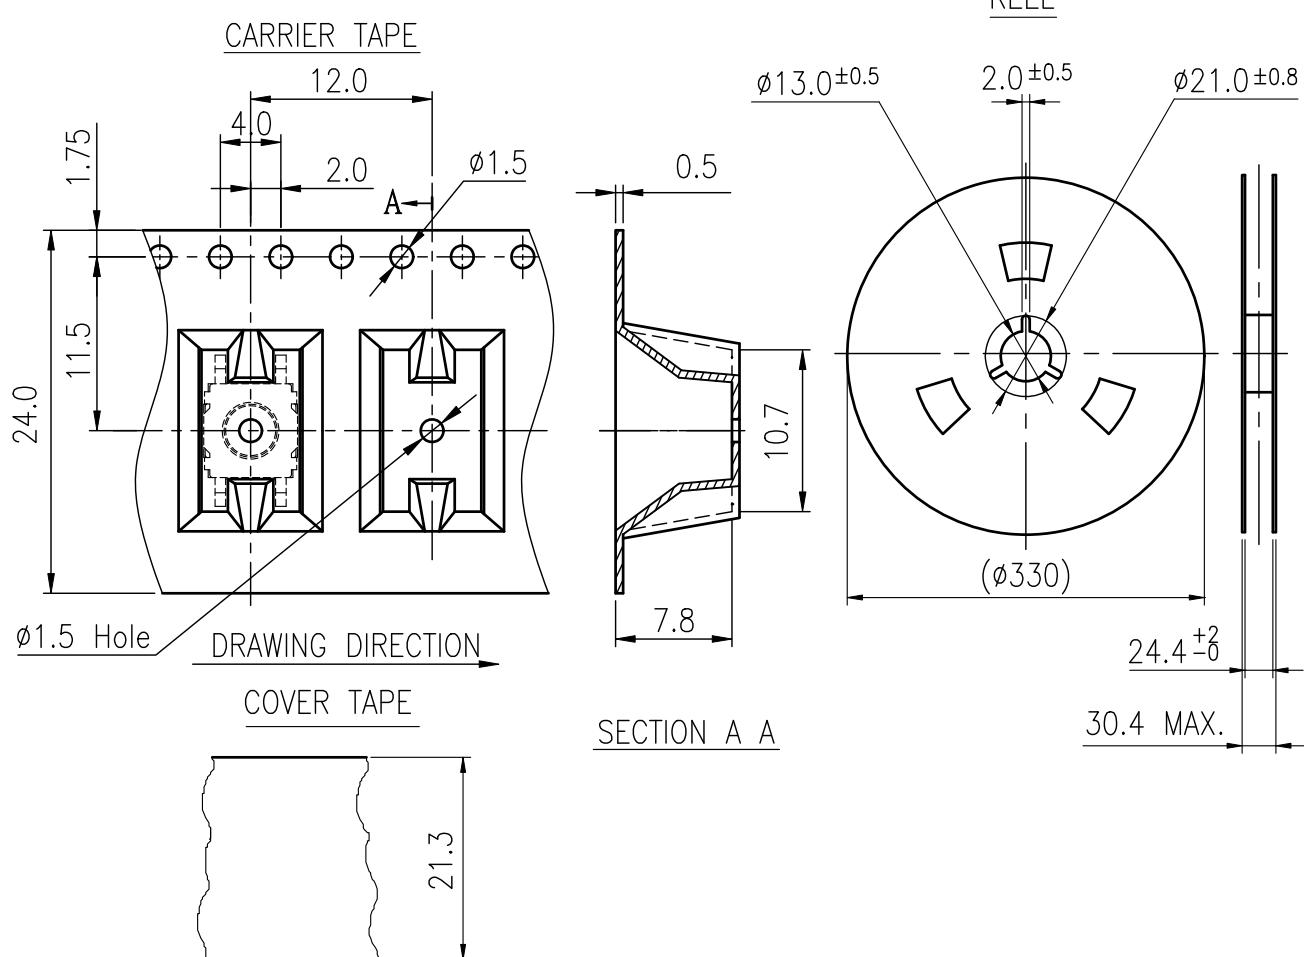

SYN	DISCRIPTION	DATE	APPROVED	APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
				Qiyuan Chuang			Jane Shen	NTC202-CC1G-E300T-R
								PAGINATE. 1/1 SPEC NO. P-853