

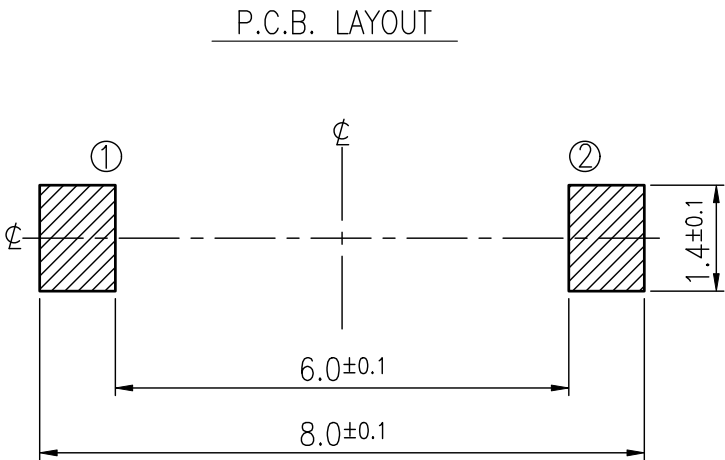

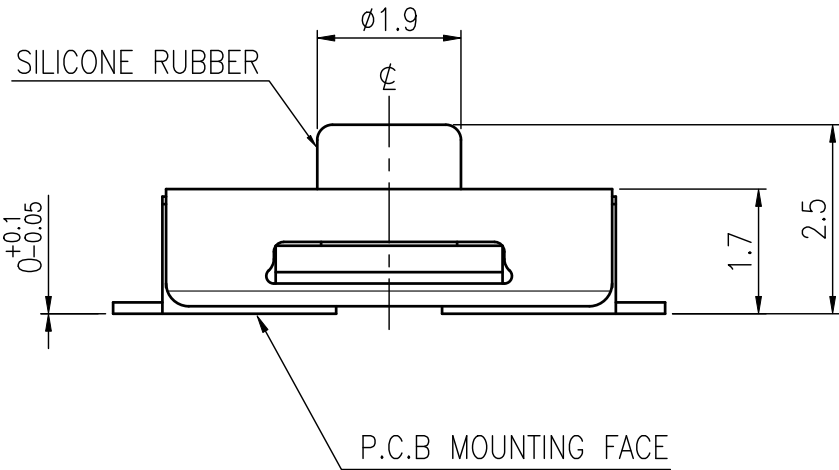



RoHS Compliant

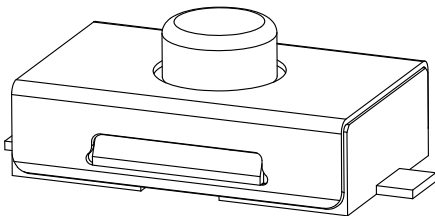

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2017.10.03	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC32V 10mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)		200±50 gf	
INSULATION RESISTANCE		DC100V-1000MΩ MIN.		STROKE (ANGLE)		0.3±0.15 mm	
WITHSTAND VOLTAGE		AC250V-1 MINUTE.		LIFE		100,000 CYCLES	
REMARKS:		Waterproof Grade : IP57					

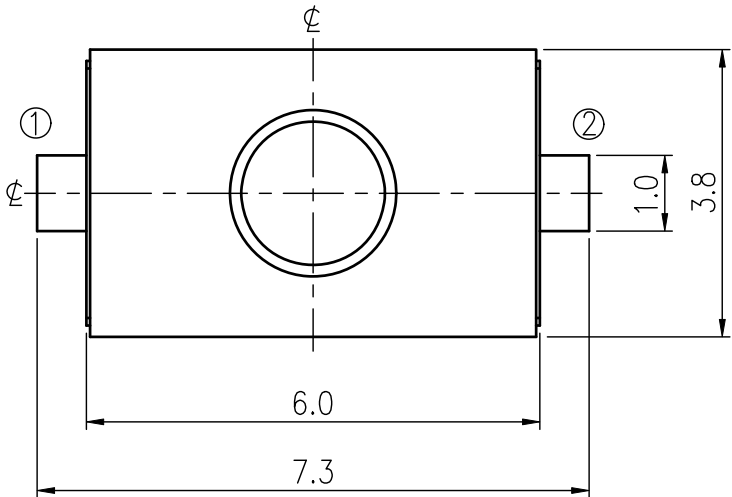

HATCHED AREA SHOWS SOLDERING LAND


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES		DATE	MODEL	
			DRAWER	Jane Shen	2017.10.03	TITLE	TACT SWITCH
			CHECKED				
	UNIT mm	SCALE 10/1	REVIEWED	Dennis Hung	2017.10.03	NO	ETC219-AA2G-25200T
			APPROVALS	Landry Su	2017.10.03		

TAIWAN MISAKI ELECTRONICS CO., LTD.

# THE PACKING SPECIFICATIONS

RoHS Compliant


## 1.STRUCTURE AND MATERIALS

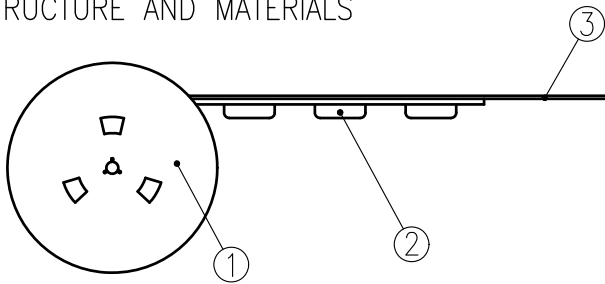

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS


- PACKAGING QUANTITY : 3,000 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180° .
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

CARRIER TAPE

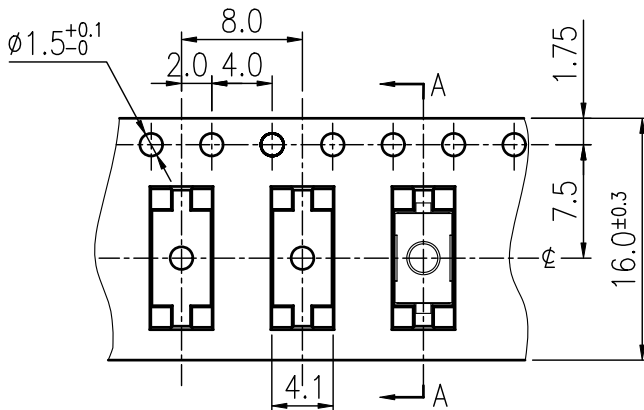


DRAWING DIRECTION

COVER TAPE



REEL

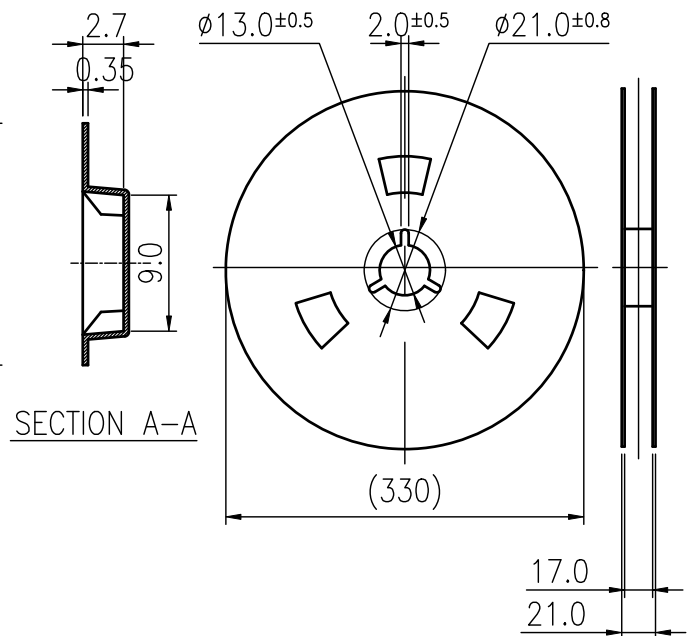

SECTION A-A

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
							Jane Shen	NTC_219-AA
								PAGINATE.
								1/1
								SPEC NO.
								P-78
SYM	DISCRPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.