
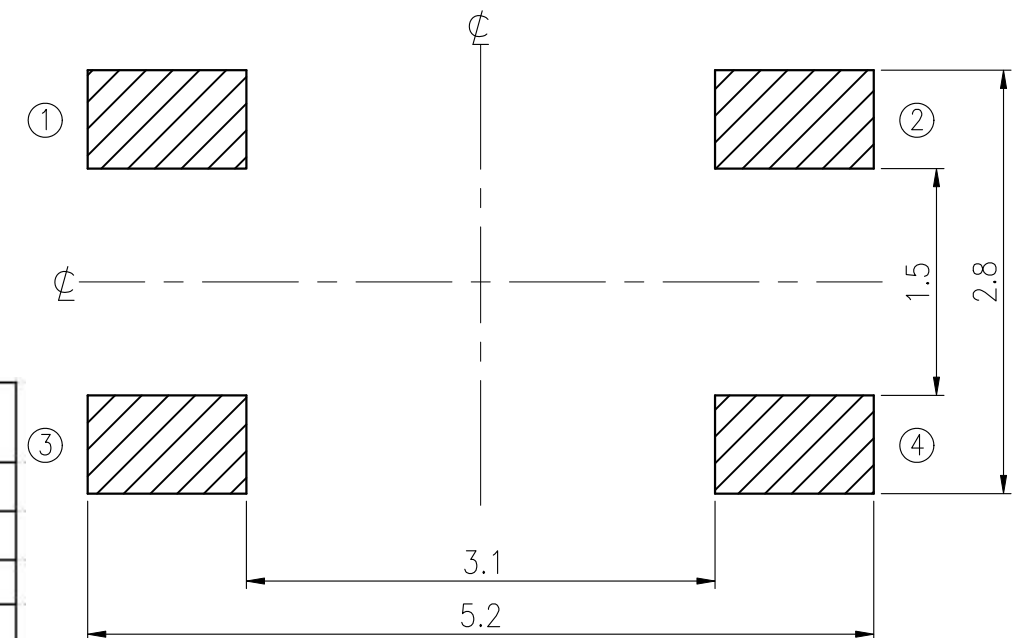

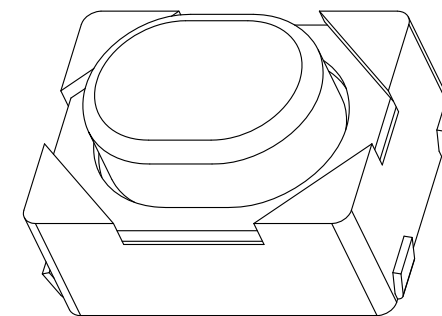
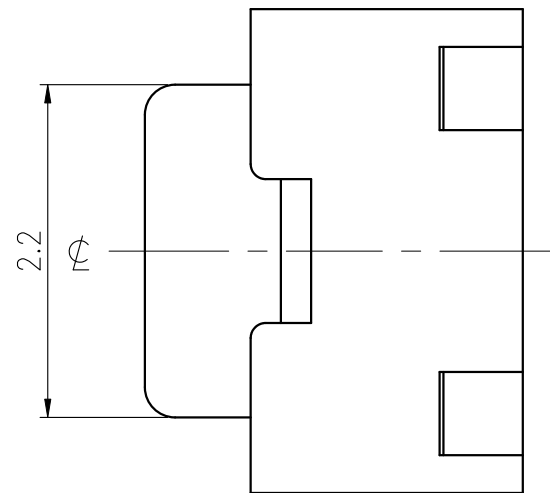


RoHS Compliant


REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2013.12.20	Max Chen	C			
B				D			

SPECIFICATIONS			
RATING	DC16V 50mA	TIMING	
CONTACT RESISTANCE	500mΩ MAX.	OPERATION (TORQUE)	
INSULATION RESISTANCE	DC500V – 100MΩ MIN.	STROKE (ANGLE)	0.2±0.1 mm 
WITHSTAND VOLTAGE	AC250V – 1 MINUTE.	CONTACT RESISTANCE	1Ω MAX.
REMARKS:		(AFTER	CYCLES LIFE TEST)

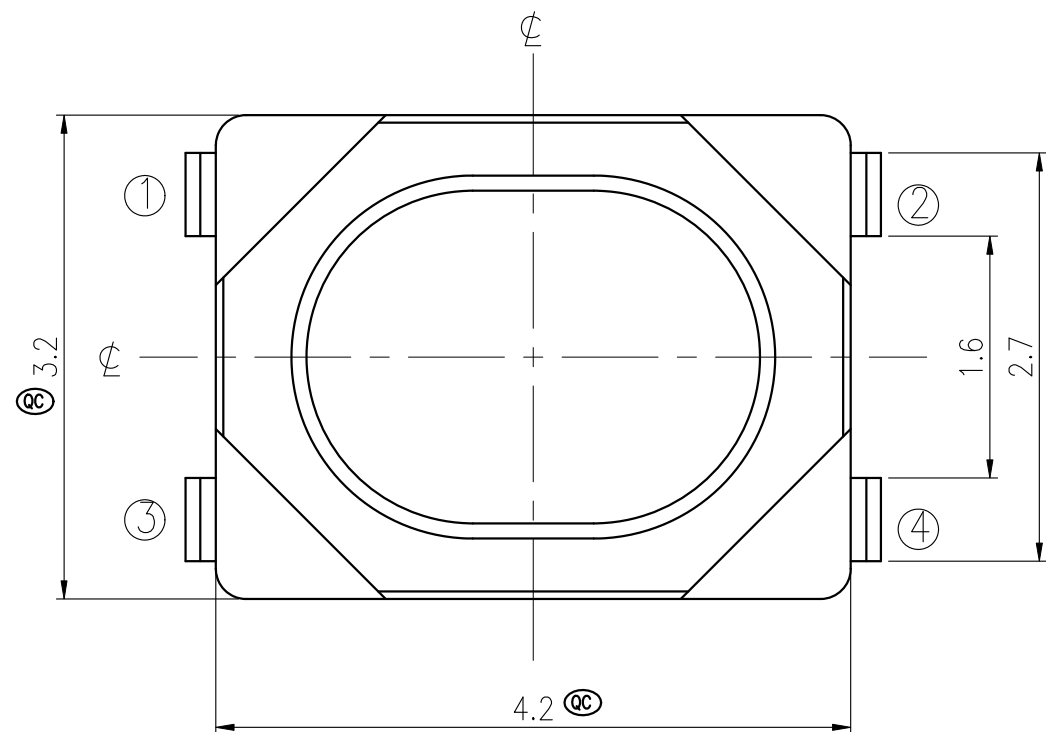

HATCHED AREA SHOWS SOLDERING LAND

MODEL NO.	OPERATING FORCE	LIFE
ETC013-AA1J-A160T	160±50gf	100,000
ETC013-AA1J-A260T	260±70gf	50,000
ETC013-AA1J-A400T	400±100gf	100,000
ETC013-AA1J-A500T	500±100gf	200,000
ETC013-AA1J-A600T	600±150gf	150,000

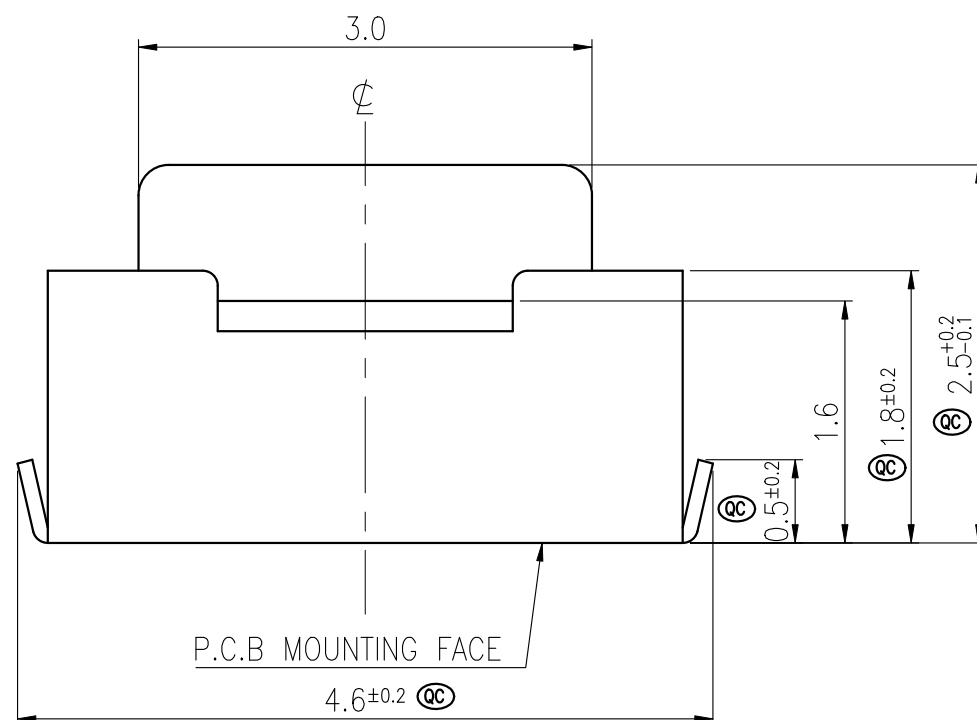

TOLERANCES UNLESS OTHERWISE SPECIFIED ± 0.1			SIGNATURES		DATE	MODEL	
			DRAWER Max Chen		2013.12.20	TITLE TACT SWITCH	
			CHECKED				
	UNIT mm	SCALE 20/1	REVIEWED			NO. SEE MODEL NO.	
			APPROVALS <i>Dennis Hung</i>		2013.12.20		

TAIWAN MISAKI ELECTRONICS CO., LTD.