

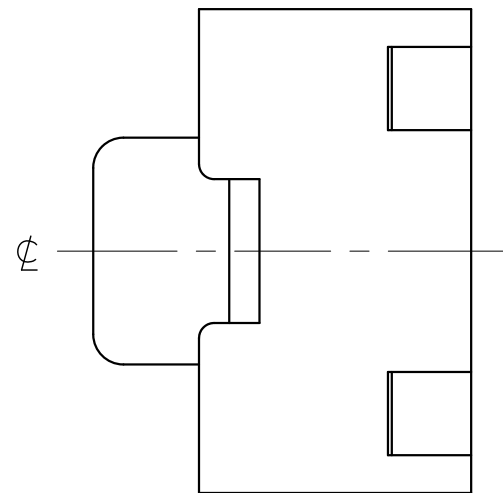
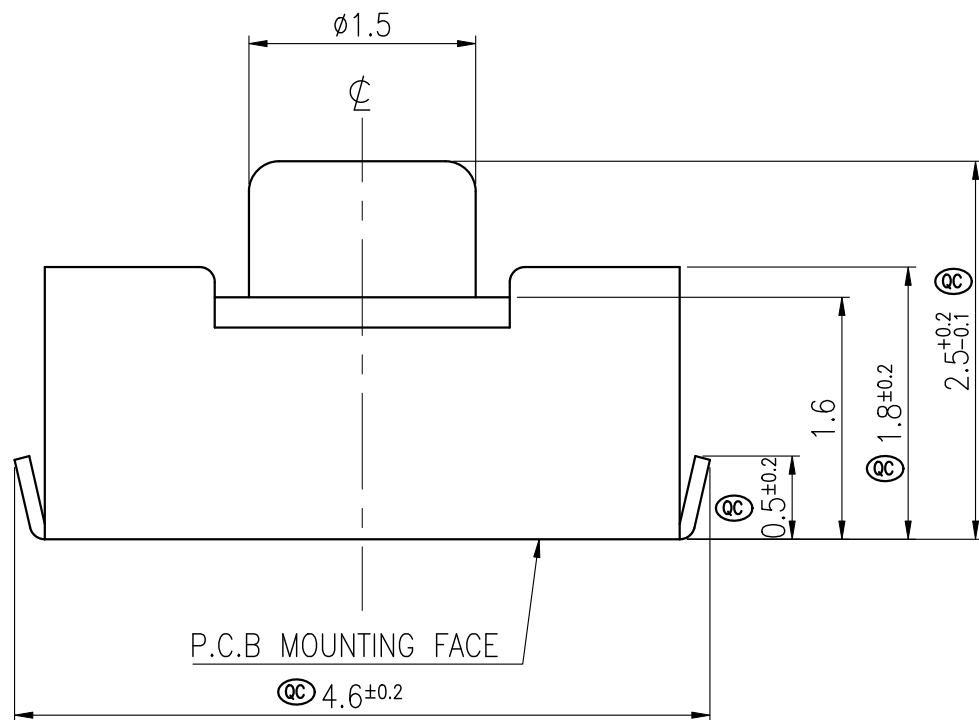



RoHS Compliant

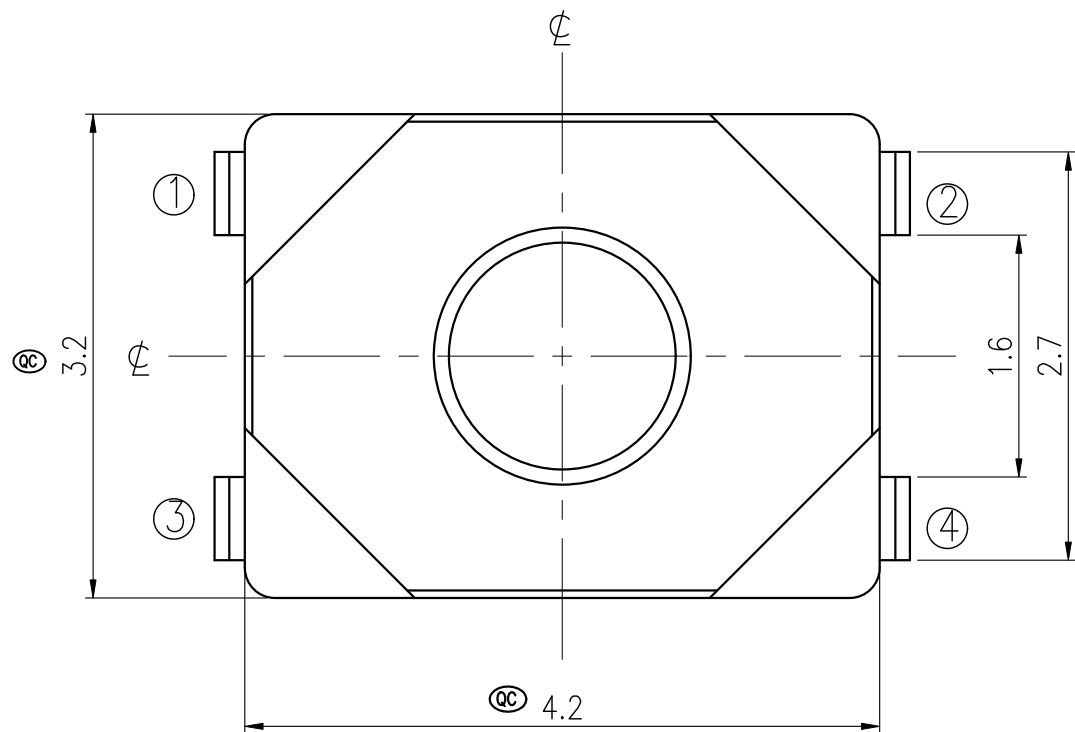

SCHEMATIC

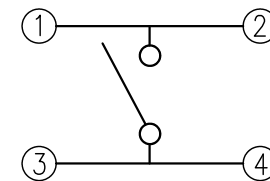

RECOMMENDED P.C.B LAYOUT

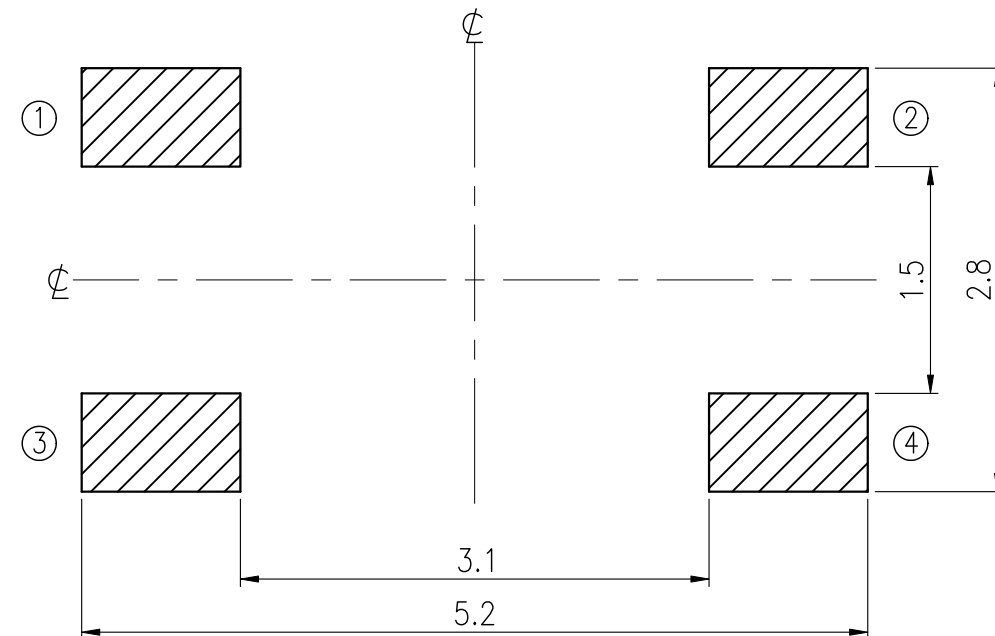

HATCHED AREA SHOWS SOLDERING LAND

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2012.12.11	Max Chen	C			
B				D			
SPECIFICATIONS							
RATING		DC16V 50mA		TIMING			
CONTACT RESISTANCE		500mΩ MAX.		OPERATION (TORQUE)			
INSULATION RESISTANCE		DC500V – 100MΩ MIN.		STROKE (ANGLE)		0.2±0.1 mm (QC)	
WITHSTAND VOLTAGE		AC250V – 1 MINUTE.		CONTACT RESISTANCE		1Ω MAX.	
REMARKS:				(AFTER		CYCLES LIFE TEST)	

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES		DATE	MODEL
			DRAWER	Max Chen	2012.12.11	TITLE
			CHECKED			TACT SWITCH
			REVIEWED			NO.
			APPROVALS	Dennis Hung	2012.12.11	ETC013-BA1J-B160T

TAIWAN MISAKI ELECTRONICS CO., LTD.