



RoHS Compliant




REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2017.03.08	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
QC	CONTACT RESISTANCE	100mΩ MAX.		OPERATION (TORQUE)		160±50 gf QC	
QC	INSULATION RESISTANCE	DC500V-100MΩ MIN.		STROKE (ANGLE)		0.25±0.15 mm QC	
QC	WITHSTAND VOLTAGE	AC250V-1MINUTE.		LIFE		1,000,000 Cycles	
REMARKS:							

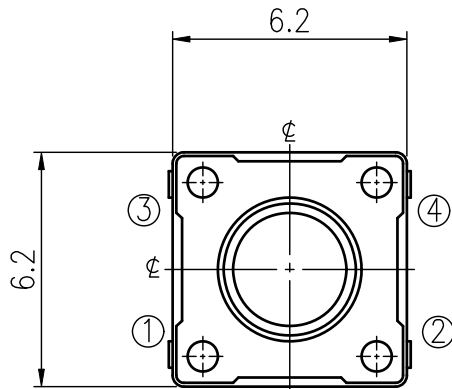

SCHEMATIC





P.C.B MOUNTING PLAN

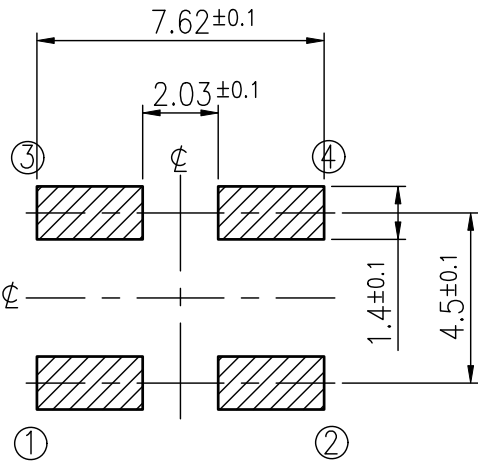

HATCHED AREA SHOWS SOLDERING LAND

ALL TERMINALS TO BE
COPLANAR WITHIN 0.1mm

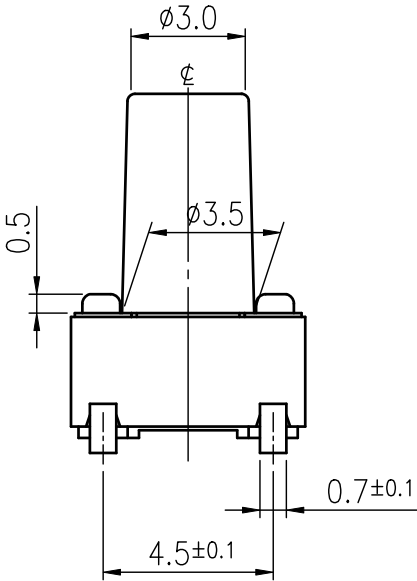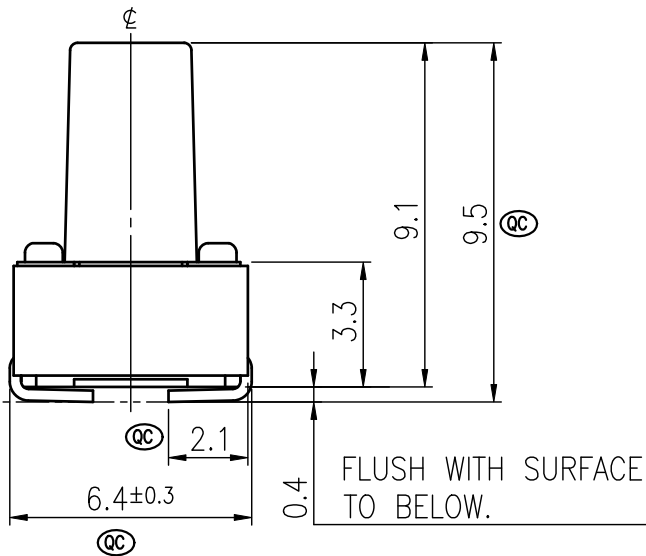


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen	2017.03.08	TITLE TACT SWITCH
	UNIT mm	SCALE 5/1	CHECKED			
			REVIEWED	Landry Su	2017.03.08	NO. ETC014-AP1U-E160T
			APPROVALS	Dennis Hung	2017.03.08	

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS

RoHS Compliant


1.STRUCTURE AND MATERIALS

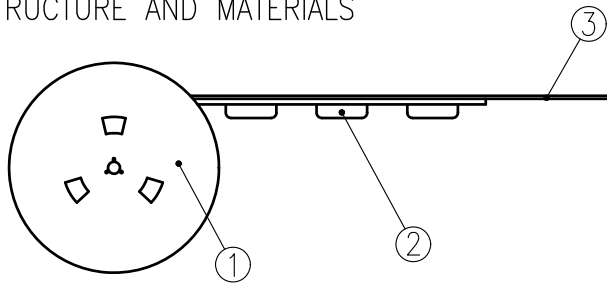

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 400 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180 °.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :



CARRIER TAPE

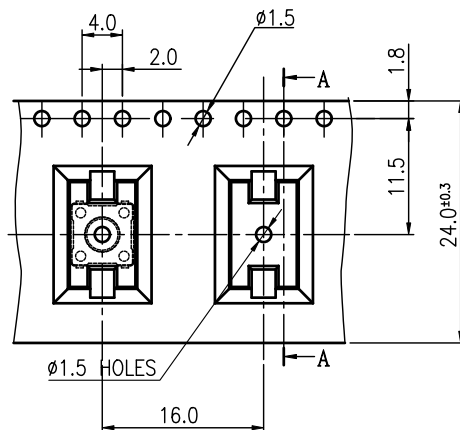

DRAWING DIRECTION →

SECTION A A

COVER TAPE

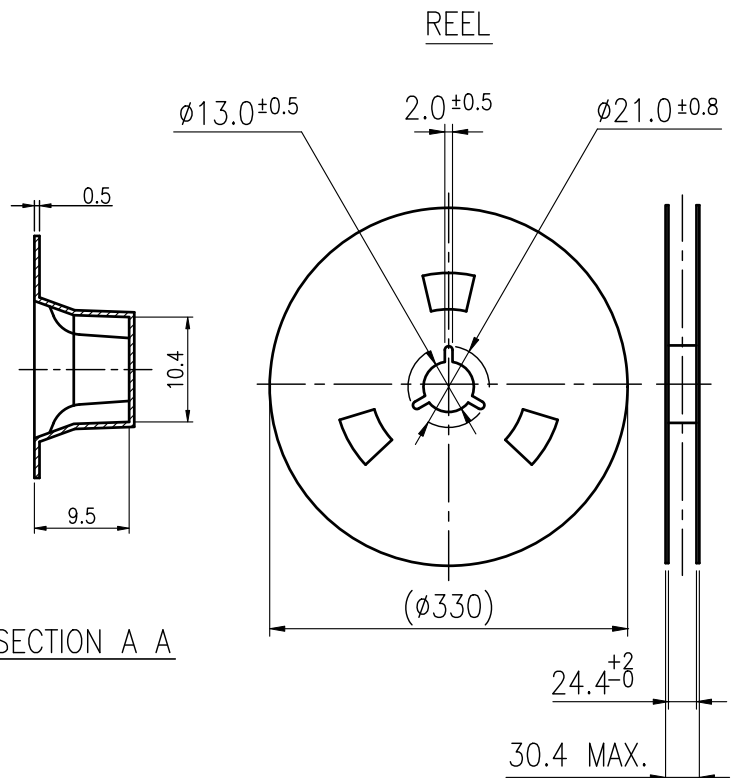

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
							Jane Shen	NTC014-AP1U-E
							2017.03.20	PAGINATE.
								1/1
								SPEC NO.
								P-812
SYM	DISCRPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.