




RoHS Compliant

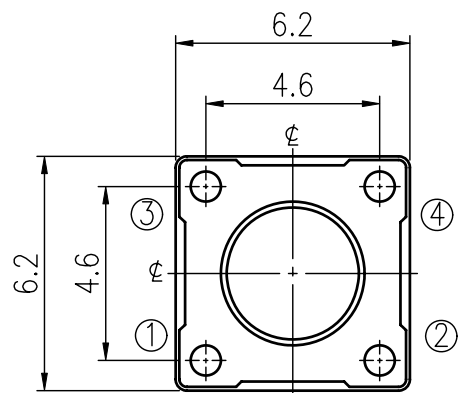


ALL TERMINALS TO BE  $\text{Ø}$  COPLANAR WITHIN 0.1mm

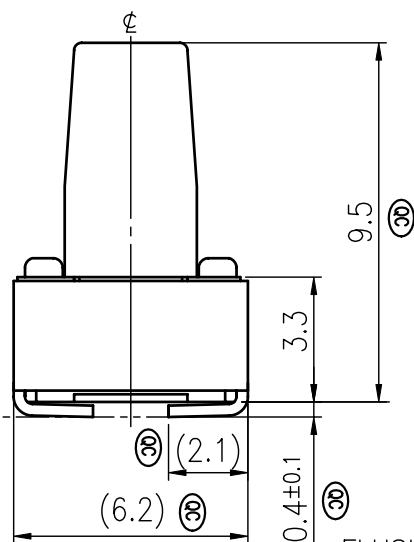


FLUSH WITH SURFACE TO BELOW.

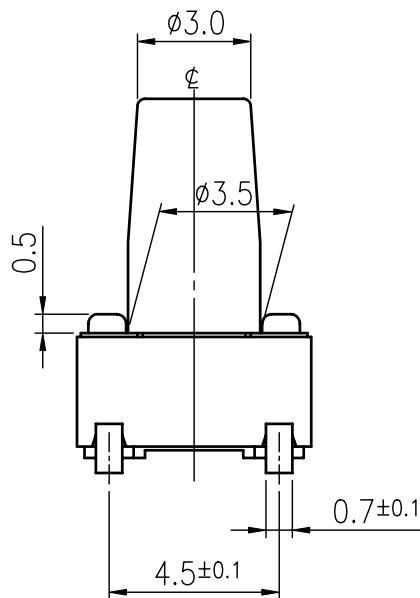

SCHEMATIC

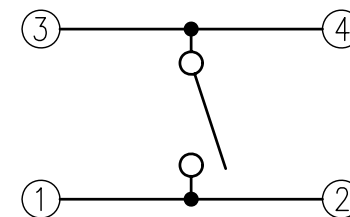

P.C.B MOUNTING PLAN

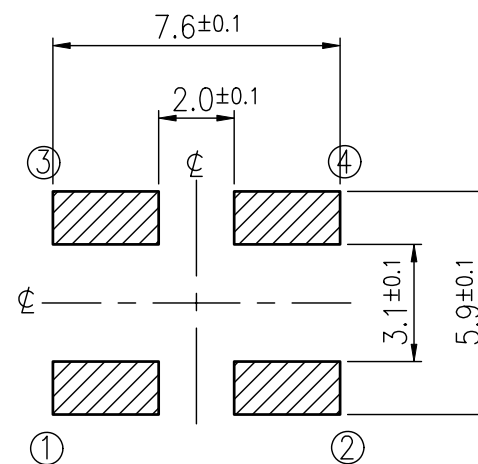

HATCHED AREA SHOWS SOLDERING LAND

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2017.05.16	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX. $\text{Ø}$		OPERATION (TORQUE)		160±50 gf $\text{Ø}$	
INSULATION RESISTANCE		DC500V - 100MΩ MIN. $\text{Ø}$		STROKE (ANGLE)		0.25±0.15 mm $\text{Ø}$	
WITHSTAND VOLTAGE		AC250V - 1 MINUTE. $\text{Ø}$		LIFE		100,000 CYCLES	
REMARKS:							


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen	2017.06.15	TITLE TACT SWITCH
$\text{Ø}$	UNIT mm	SCALE 5/1	CHECKED			
			REVIEWED	Landry Su	2017.06.15	NO. ETC014-AA2U-C160T
			APPROVALS	Dennis Hung	2017.06.15	

TAIWAN MISAKI ELECTRONICS CO., LTD.

# THE PACKING SPECIFICATIONS


RoHS Compliant

## 1. STRUCTURE AND MATERIALS

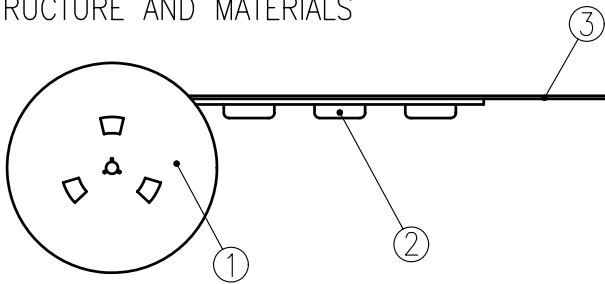

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 400 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180°.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

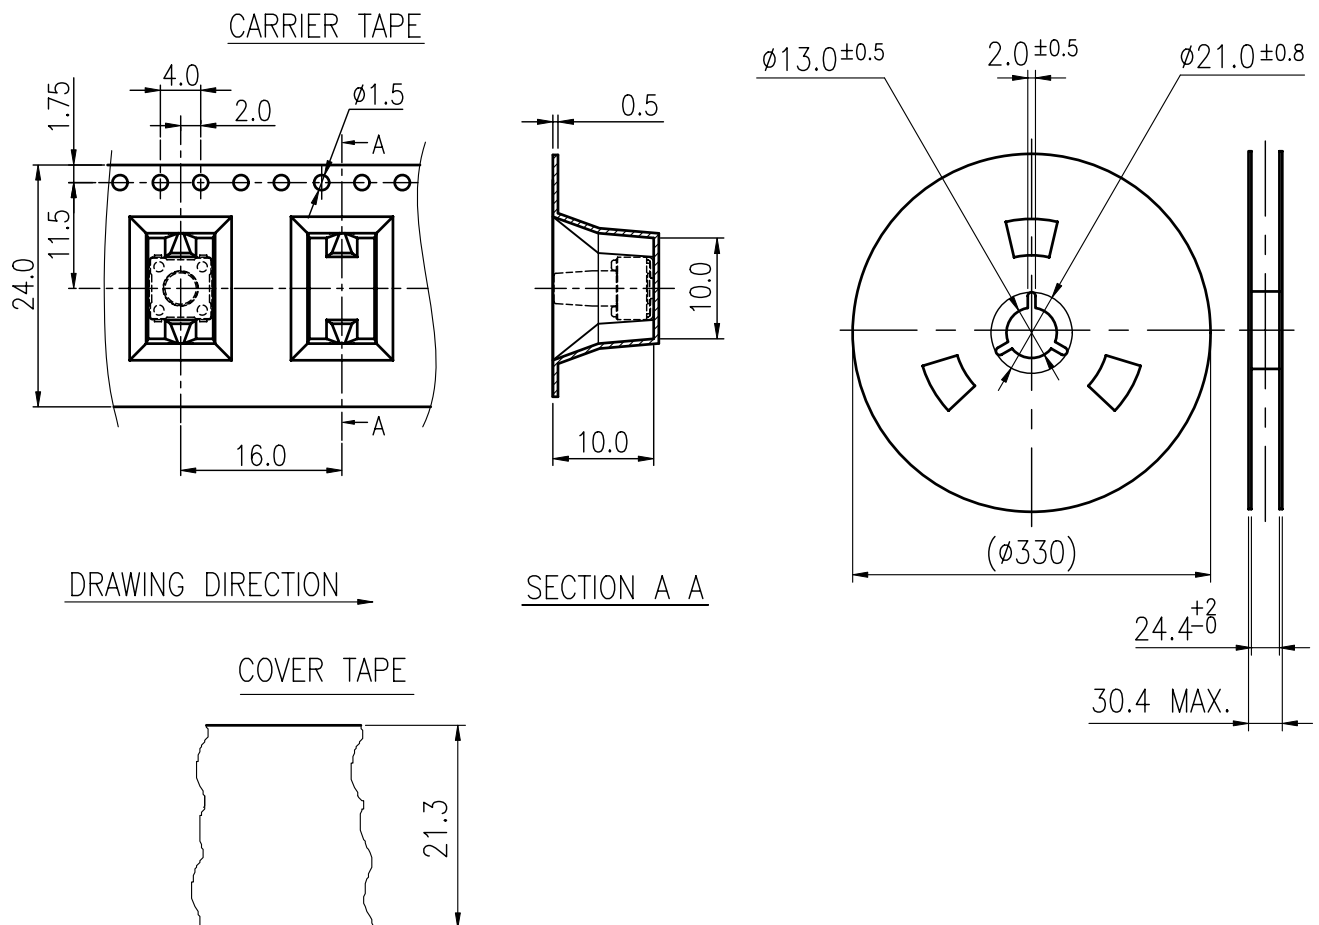

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
							Jane Shen	NTC014-AA2U-C160T
							2017.06.14	PAGINATE.
								1/1
								SPEC NO.
								P-818
SYM	DISCRIPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.