


HATCHED AREA SHOWS SOLDERING LAND

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2021.07.06	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
CONTACT RESISTANCE		500mΩ MAX.		OPERATION (TORQUE)		160±50 gf	
INSULATION RESISTANCE		DC100V - 100MΩ MIN.		STROKE (ANGLE)		0.25±0.1 mm	
WITHSTAND VOLTAGE		AC250V - 1 MINUTE.		LIFE		30,000 CYCLES	
REMARKS:							

SCHEMATIC




P.C.B MOUNTING PLAN

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen	2024.03.22	TACT SWITCH
			CHECKED			
	UNIT mm	SCALE 10/1	REVIEWED			NO. ETC016-AB2G-A160T
			APPROVALS		Qiuyuan Chuang 2024.03.22	

THE PACKING SPECIFICATIONS


RoHS Compliant

1.STRUCTURE AND MATERIALS

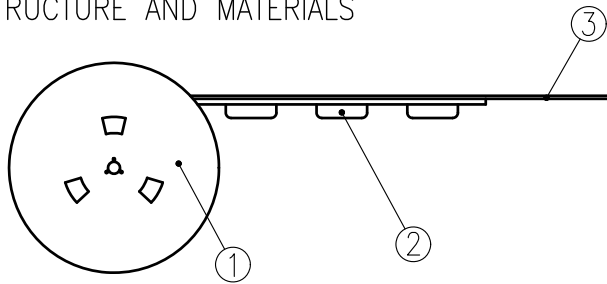

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 2,500 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180°.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481-C
- DIMENSIONS :

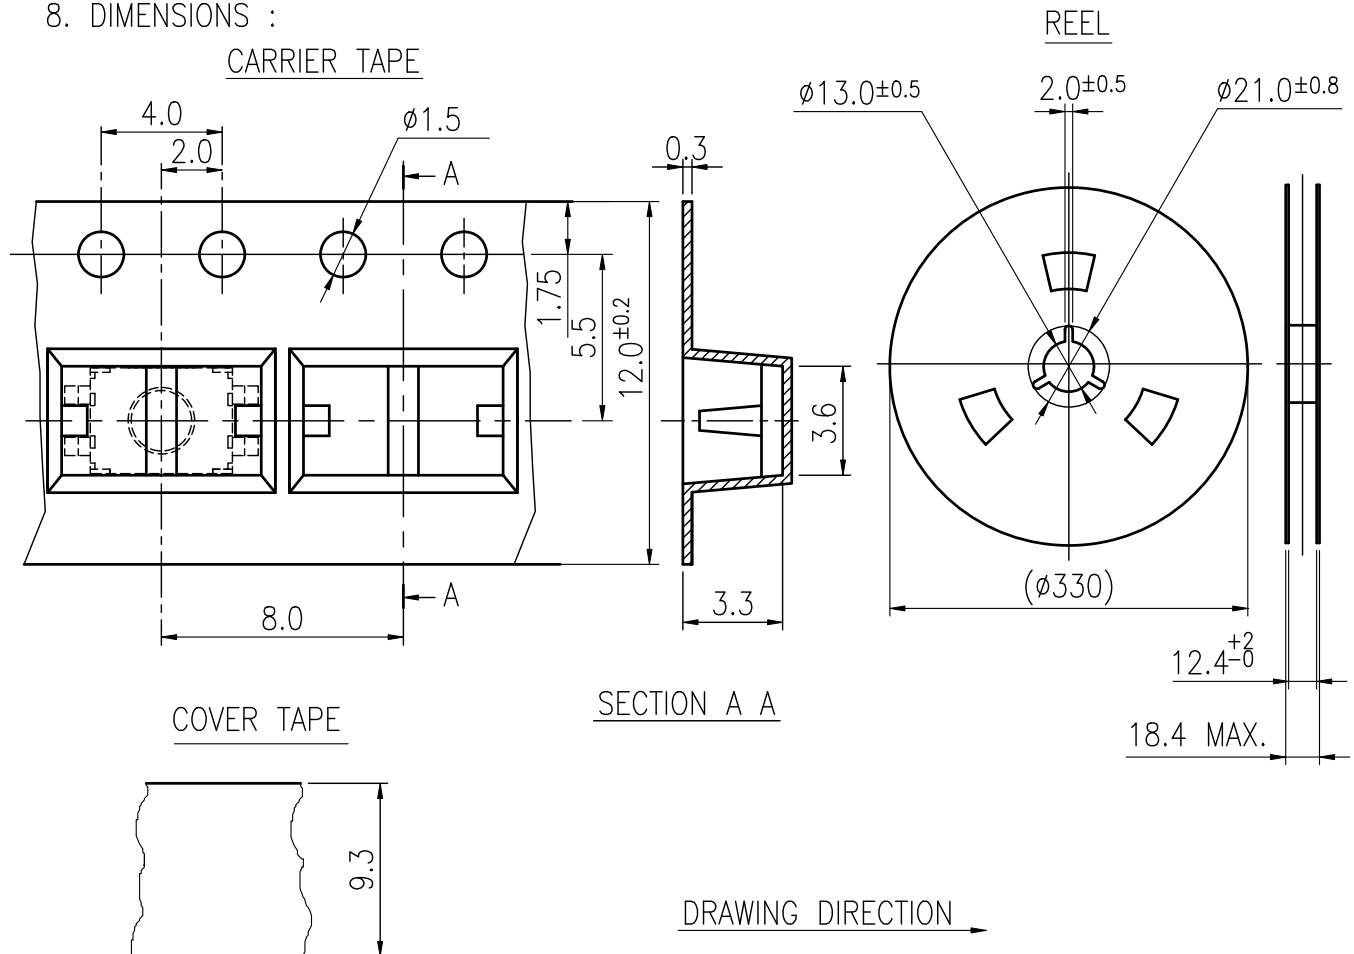

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
				Qinyuan Chuang			Jane Shen	NTC016-A
								PAGINATE.
								1/1
								SPEC NO.
								P-75
SYM	DISCRPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.