



RoHS Compliant

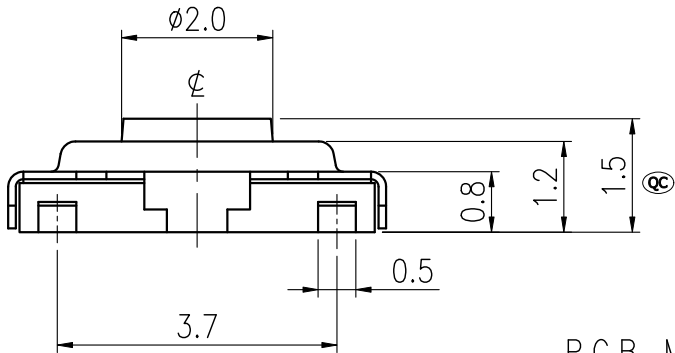


REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2013.01.22	Jane Shen	C			
B				D			


SPECIFICATIONS			
RATING	DC12V 50mA	TIMING	
CONTACT RESISTANCE	50mΩ MAX.	OPERATION (TORQUE)	
INSULATION RESISTANCE	DC500V-100MΩ MIN.	STROKE (ANGLE)	0.25±0.05 mm ㊟
WITHSTAND VOLTAGE	AC250V-1 MINUTE	CONTACT RESISTANCE	2Ω MAX.
REMARKS:		(AFTER	CYCLES LIFE TEST)

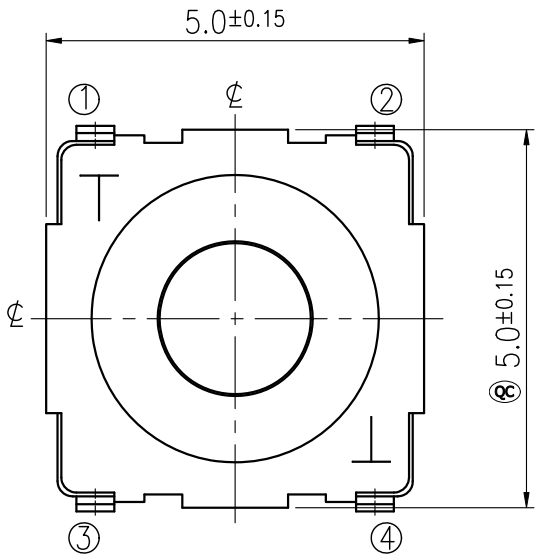


P.C.B. MOUNTING FACE

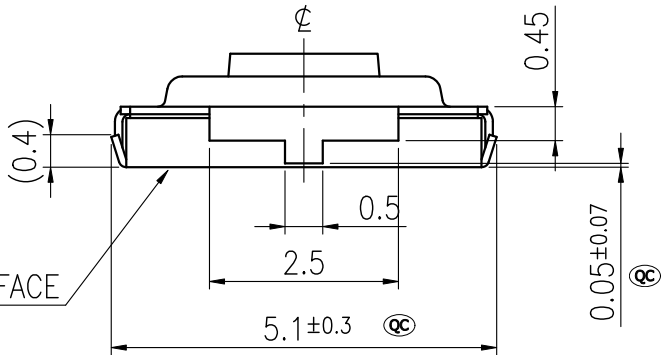

SCHEMATIC



P.C.B MOUNTING PLAN

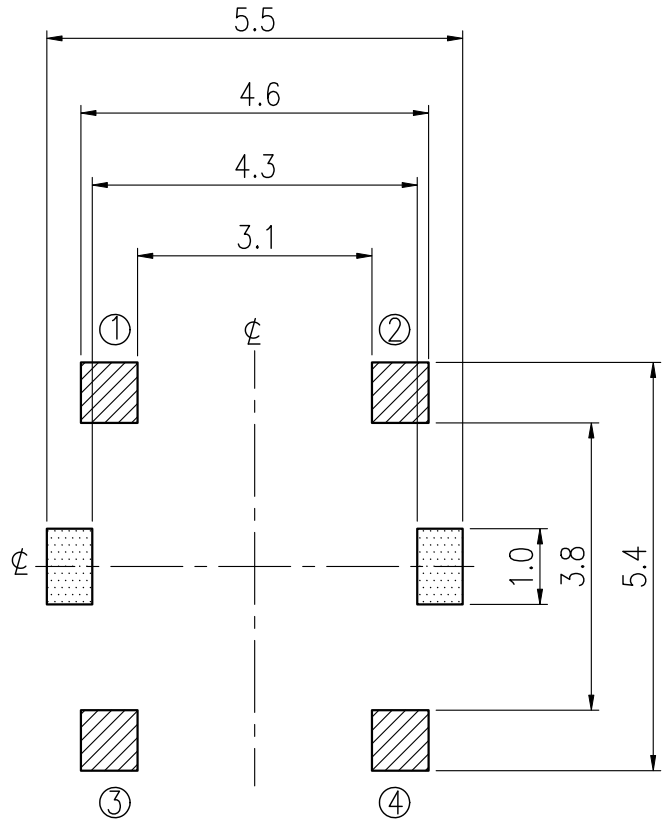

GROUND TERMINAL CAN BE EFFECTIVE EVEN IF NOT SOLDERED.


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen	2013.01.22	TITLE TACT SWITCH
			CHECKED	Jamie Li	2013.01.22	
	UNIT mm	SCALE 10/1	REVIEWED			NO. ETC017-BE1J-A160FL
			APPROVALS Dennis Hung		2013.01.22	

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS



RoHS Compliant

1. STRUCTURE AND MATERIALS

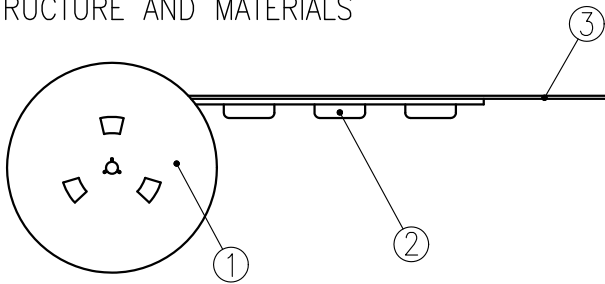

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 4,000 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCEPTABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO **130 gf** AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180°.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481
- DIMENSIONS :

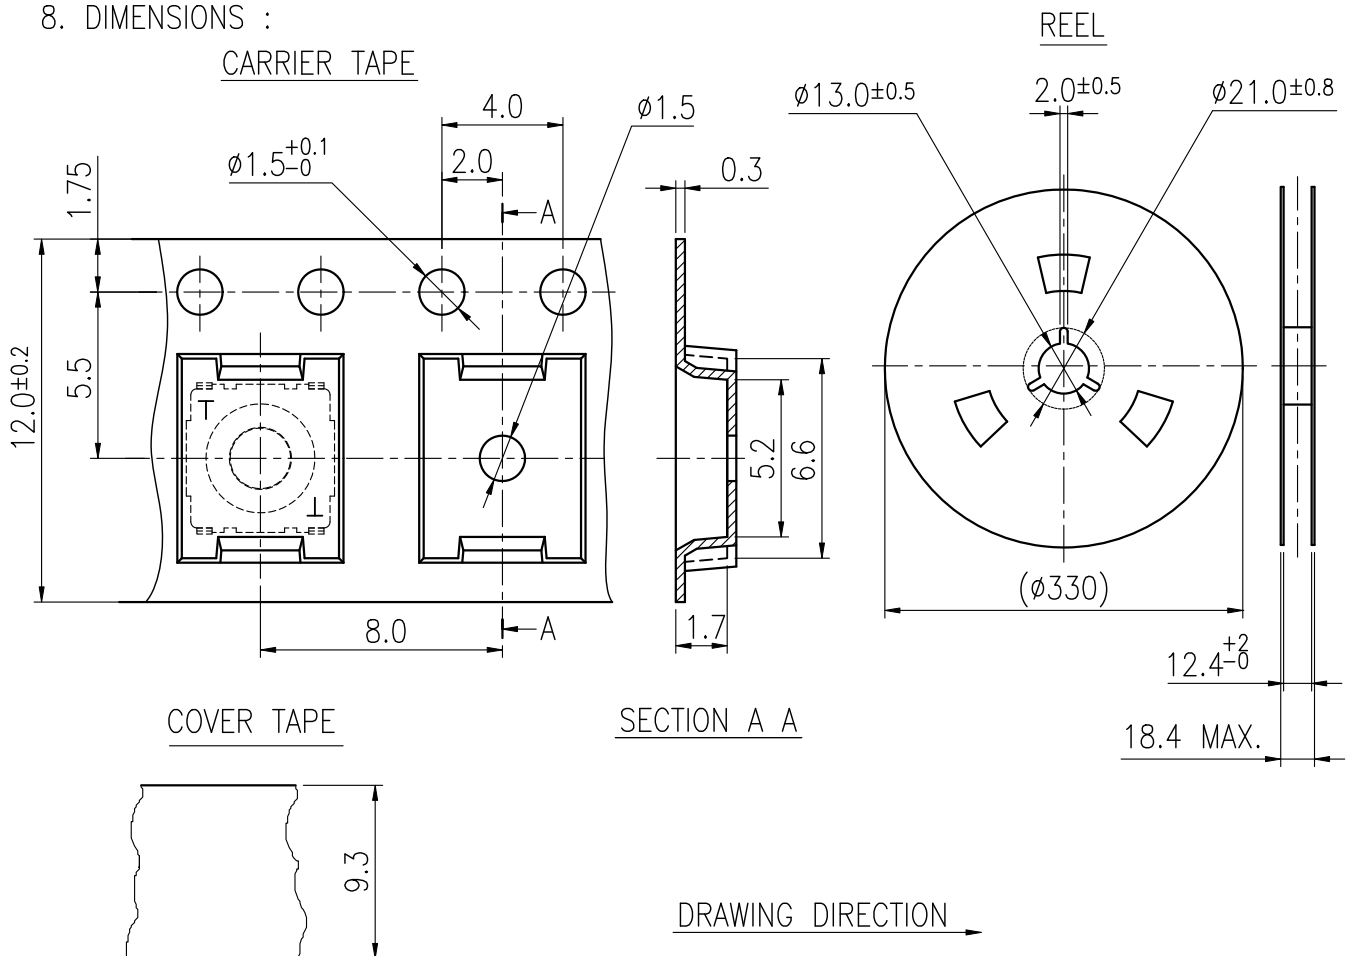

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
							Jane Shen	NTC017-BE1J- A160FL
							2012.04.12	PAGINATE.
								1/1
								SPEC NO.
								P-48
SYM	DISCRIPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.