




**RoHS Compliant**

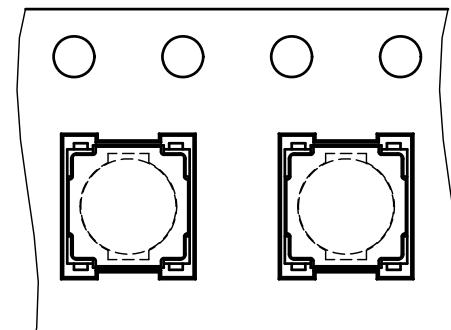


CARRIER TAPE

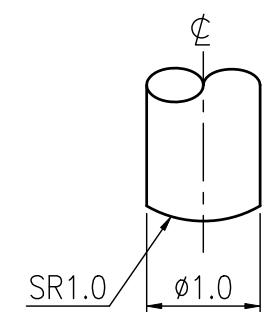



SHAPE OF KEYING TIP

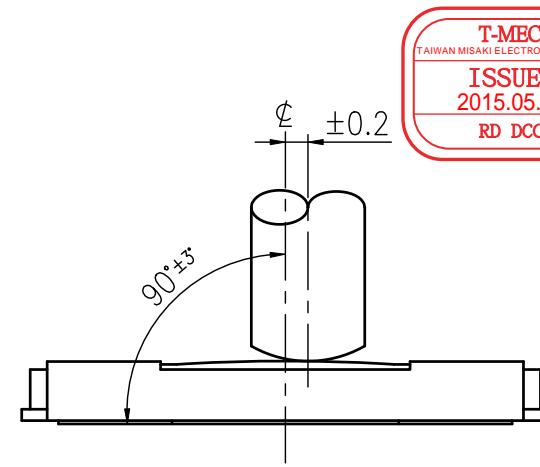

RESTRICTION IN OPERATION

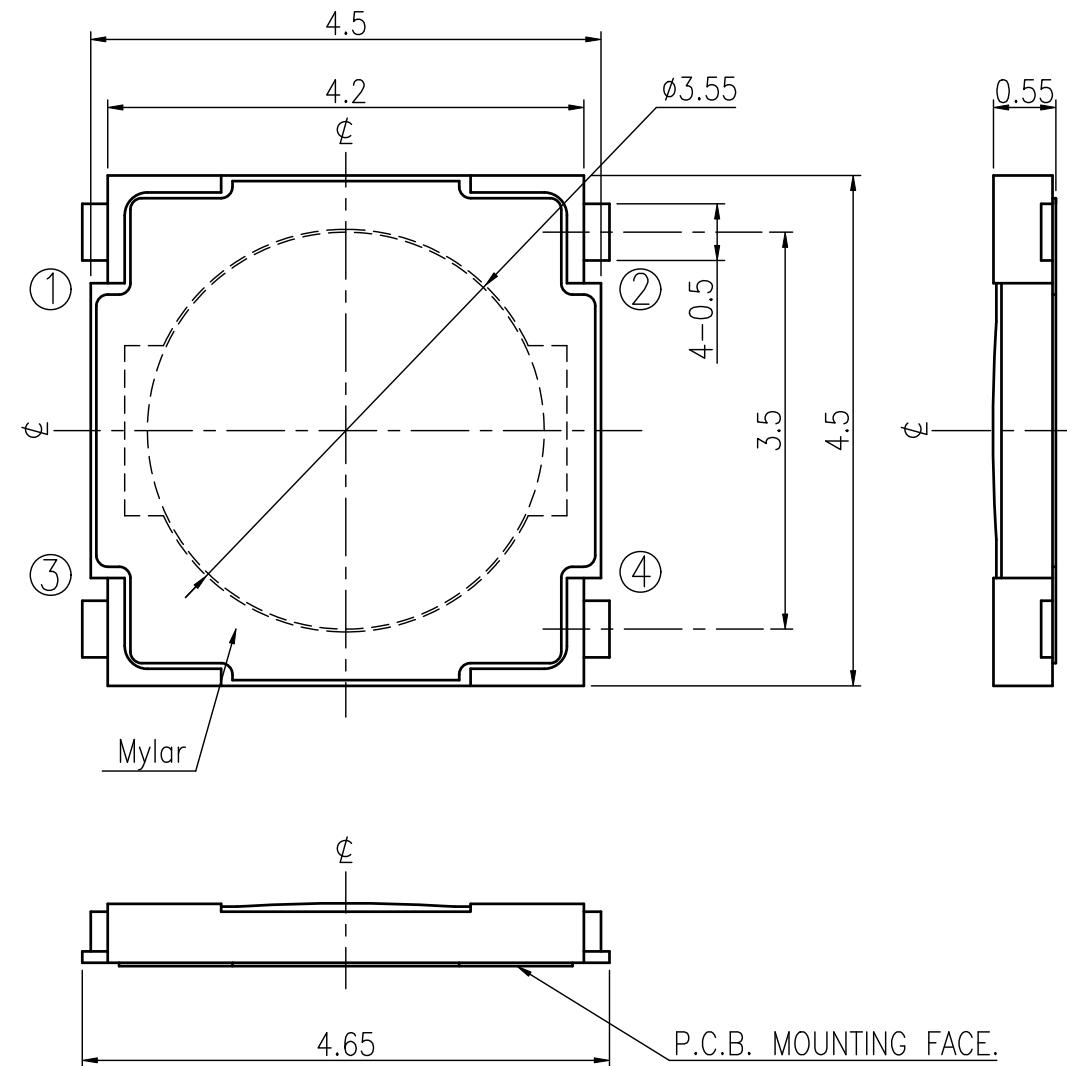

P.C.B. MOUNTING FACE

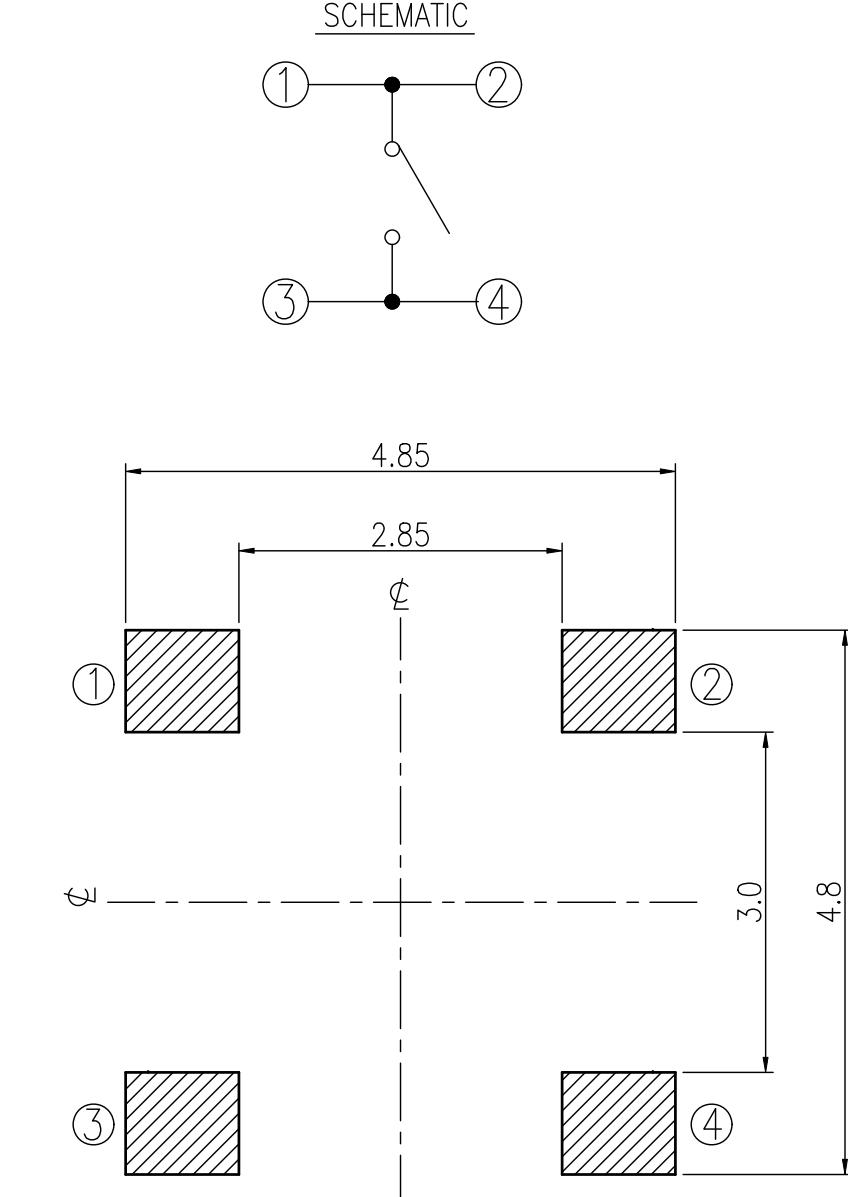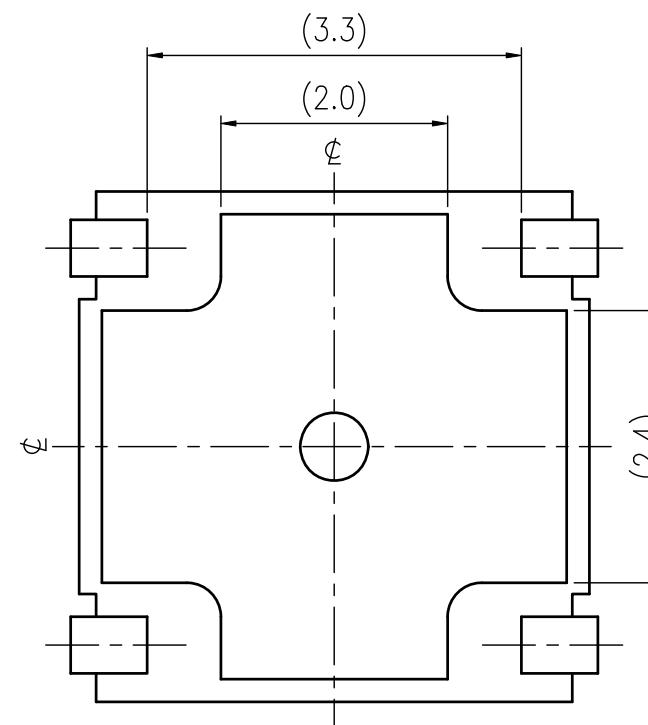

REFERENCE LAND FORM

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES		DATE	MODEL					
			DRAWER	Jane Shen							
CHECKED			Jamie Li	2015.04.15	TITLE	TACT SWITCH					
	UNIT mm	SCALE 15/1									
REVIEWED			APPROVALS Dennis Hung			NO. ETC033-XK1K-X200T					
TAIWAN MISAKI ELECTRONICS CO., LTD.											

T-MEC  
TAIWAN MISAKI ELECTRONICS CO., LTD  
ISSUED  
2015.05.11  
RD DCC

REVISIONS


Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2013.06.07	Ken Lin	C			
B	Change Drawing (Cancel Symbol line)	2015.04.15	Jane Shen	D			
SPECIFICATIONS							
RATING	DC12V 50mA	TIMING					
CONTACT RESISTANCE	100mΩ MAX.	OPERATION (TORQUE)	200±30 gf				
INSULATION RESISTANCE	DC500V-100MΩ MIN.	STROKE (ANGLE)	0.2±0.15 mm				
WITHSTAND VOLTAGE	AC250V-1 MINUTE	CONTACT RESISTANCE	2Ω MAX.				
REMARKS:		(AFTER 200,000 CYCLES LIFE TEST)					

SCHEMATIC

# THE PACKING SPECIFICATIONS


RoHS Compliant

## 1. STRUCTURE AND MATERIALS

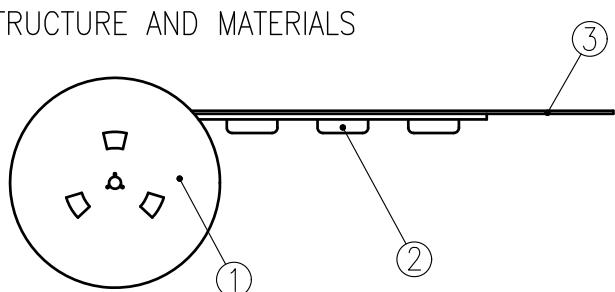

NO.	PARTS NAME	MATERIALS
③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE

- PACKAGING QUANTITY : 7,000 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCEPTABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180°.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481-C
- DIMENSIONS :

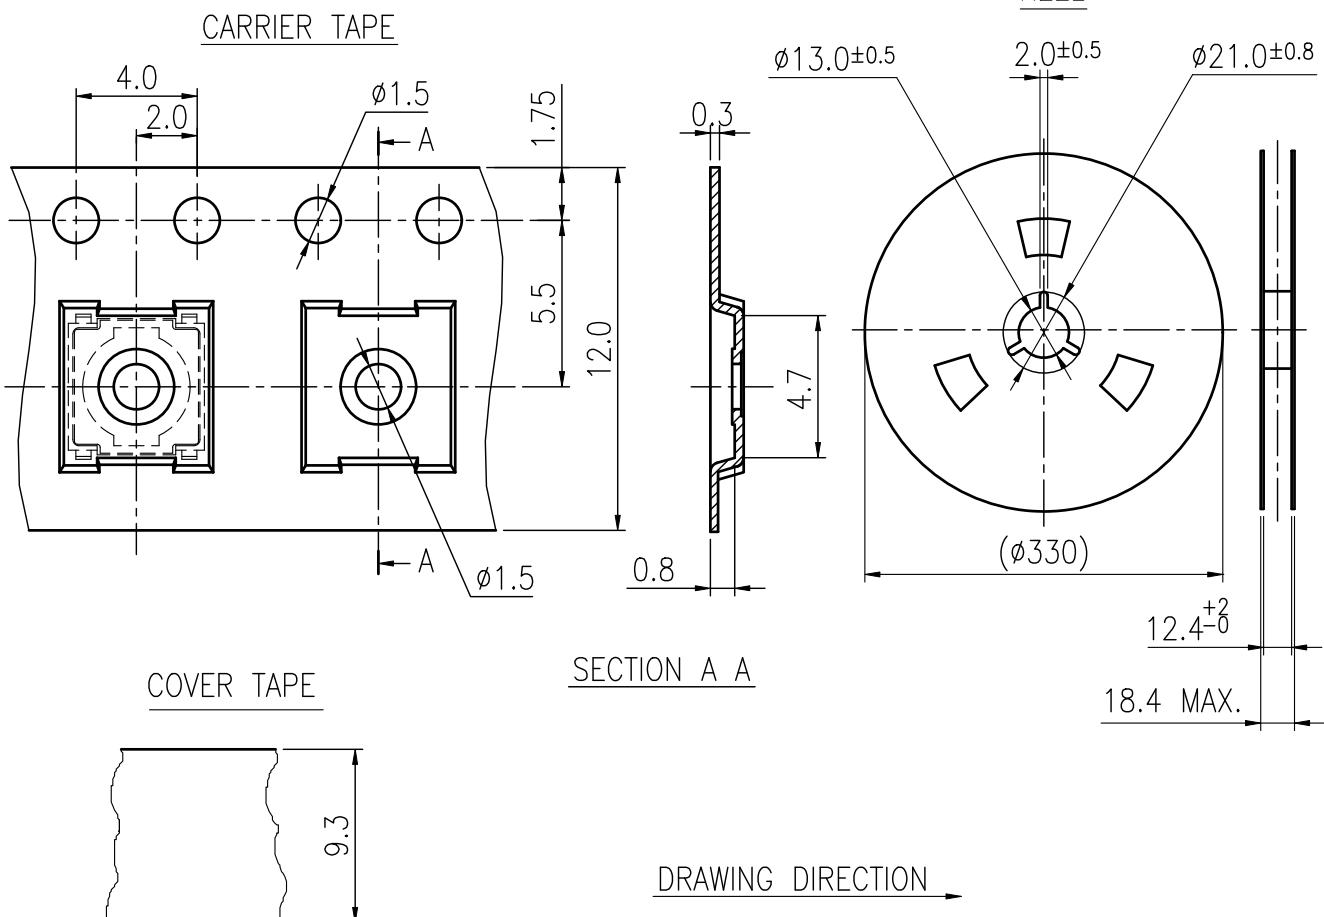

SYN	DESCRIPTION	DATE	APPROVED	APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
				Qiyuan Chuang			Jane Shen	NTC 033-X
								PAGINATE. 1/1 SPEC NO. P-656