



RoHS Compliant




REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2018.10.04	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC24V 50mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)		160±50 gf	
INSULATION RESISTANCE		DC500V – 100MΩ MIN.		STROKE (ANGLE)		0.35±0.2 mm	
WITHSTAND VOLTAGE		AC250V – 1 MINUTE.		LIFE		5,000,000 CYCLES	
REMARKS:		Waterproof Grade : IP67					

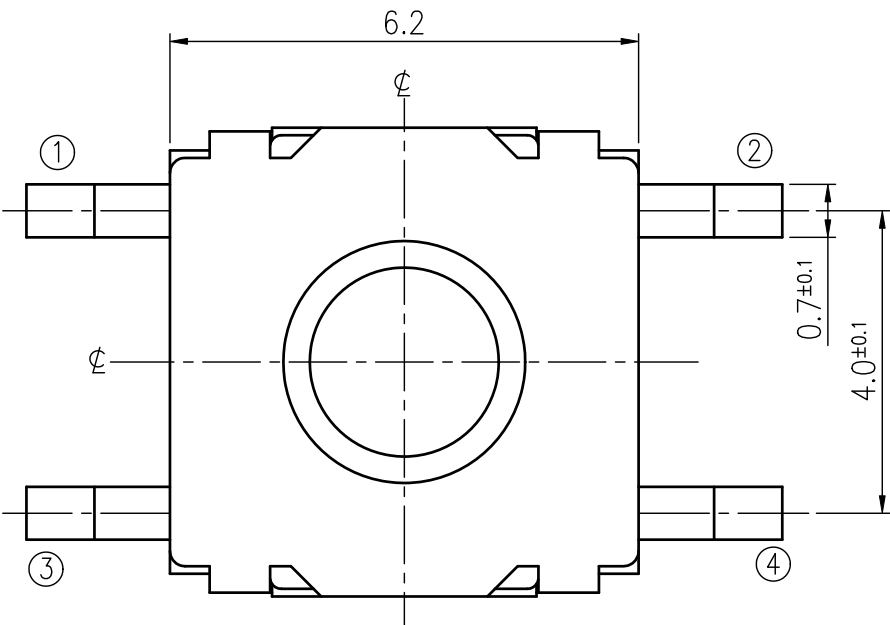



SCHEMATIC




RECOMMENDED P.C.B LAYOUT

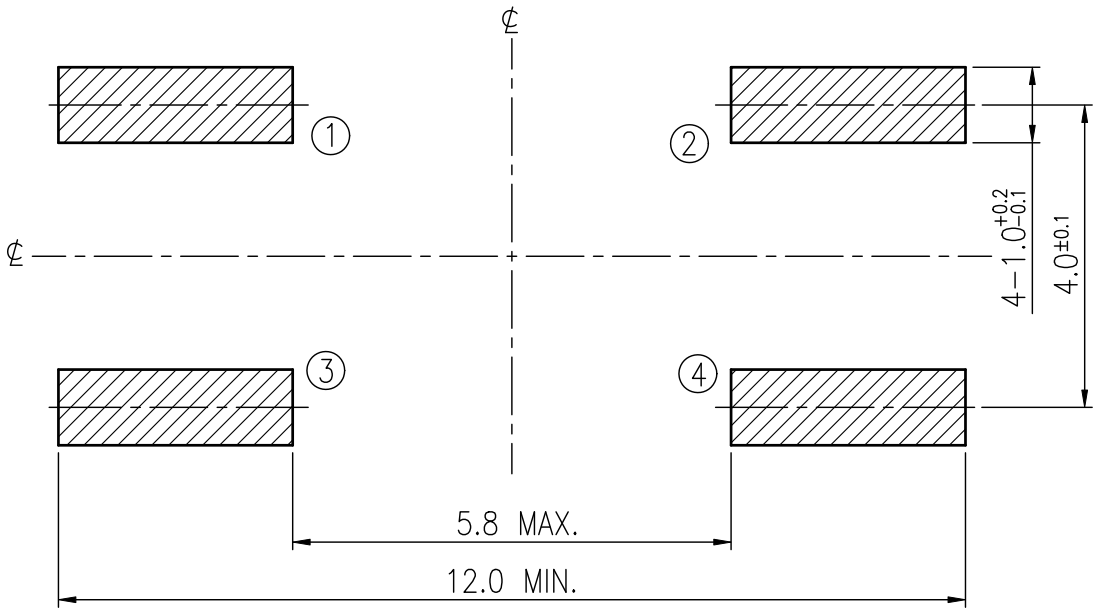

HATCHED AREA SHOWS SOLDERING LAND

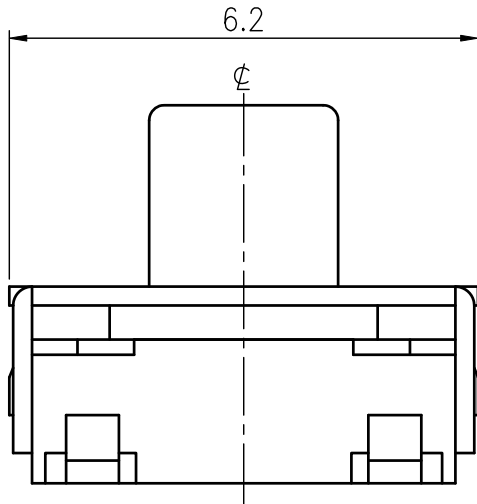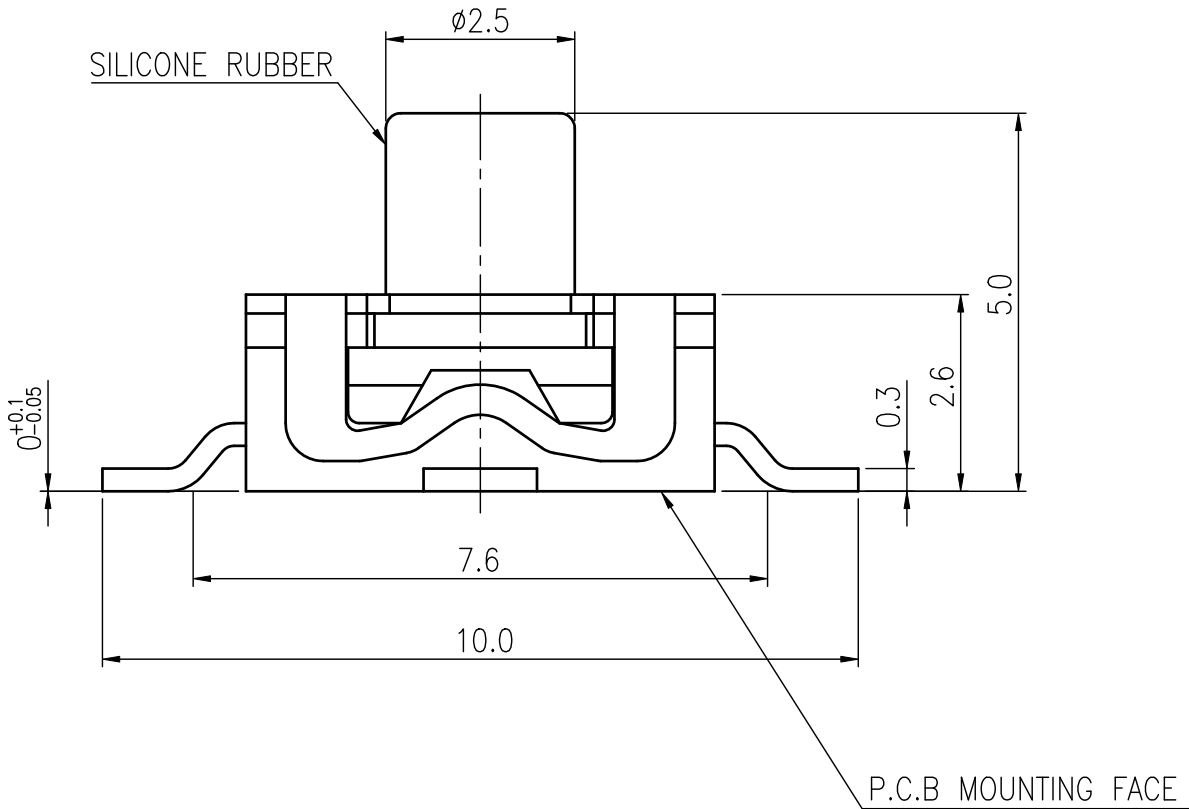


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES		DATE	MODEL	
			DRAWER	Jane Shen	2018.10.04	TITLE TACT SWITCH	
			CHECKED				
	UNIT	SCALE	REVIEWED	<i>Landry Pu</i>	2018.10.04	NO. ETC202-AA1G-50160TX	
	mm	10/1	APPROVALS	<i>Dennis Hung</i>	2018.10.04		
TAIWAN MISAKI ELECTRONICS CO., LTD.							

THE PACKING SPECIFICATIONS





RoHS Compliant

1.STRUCTURE AND MATERIALS

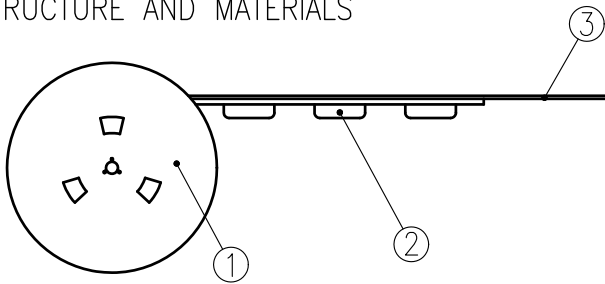

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 1000 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180° .
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

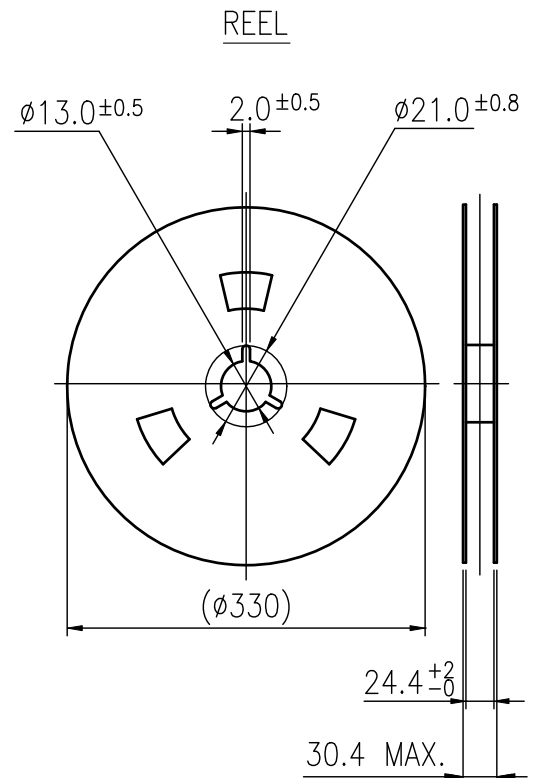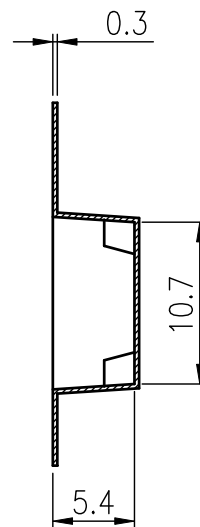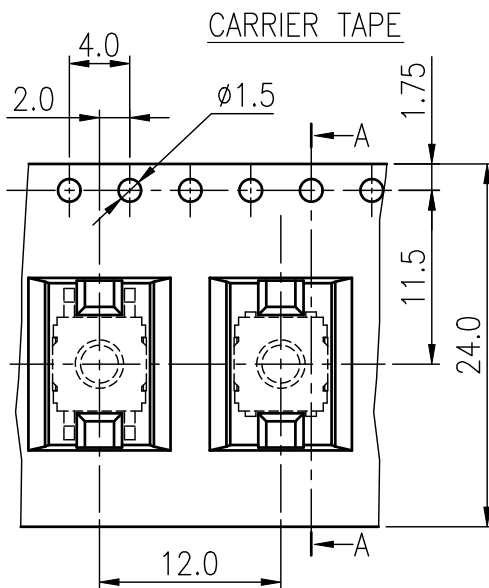

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
							Jane Shen	NTC 202-AA1 -5 160
							2017.10.17	PAGINATE.
								1/1
								SPEC NO.
								P-772
SYM	DISCRIPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.