
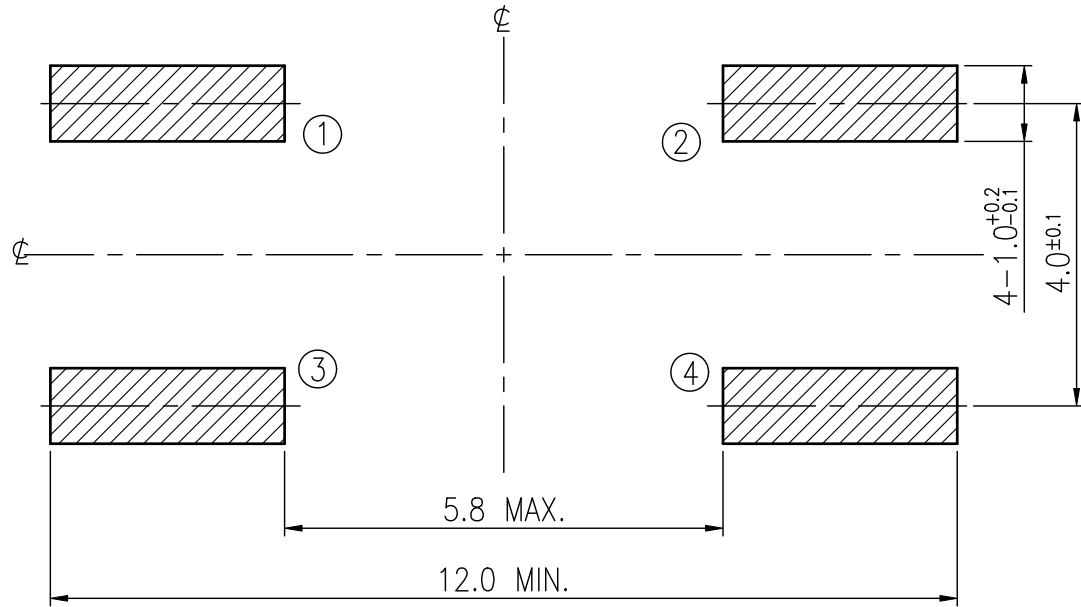
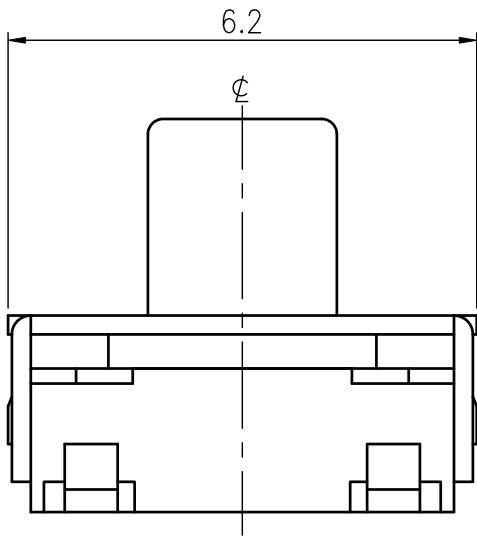
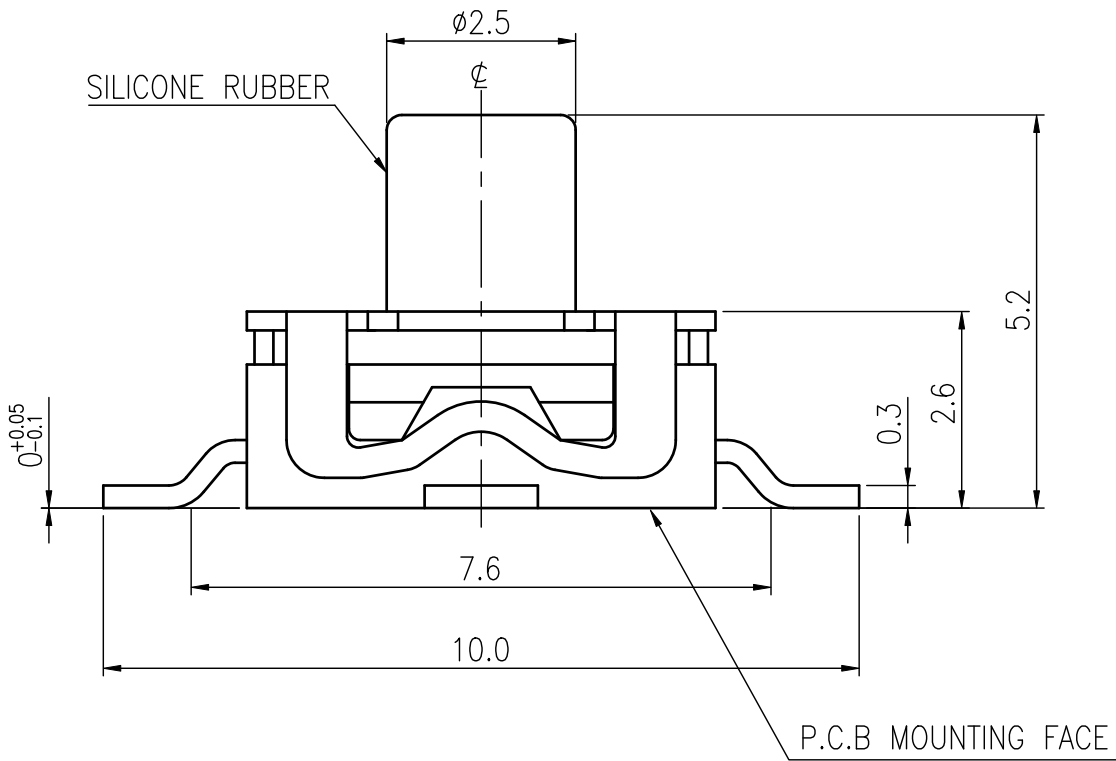



RoHS Compliant

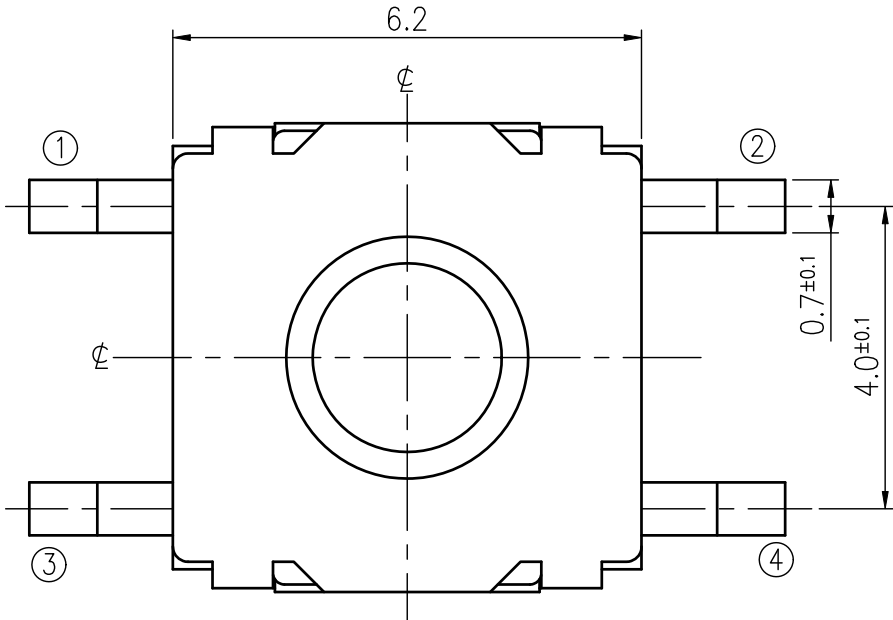

HATCHED AREA SHOWS SOLDERING LAND

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2018.10.04	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC32V 50mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)		145±50 gf	
INSULATION RESISTANCE		DC100V-1000MΩ MIN.		STROKE (ANGLE)		0.5±0.25 mm	
WITHSTAND VOLTAGE		AC250V-1 MINUTE.		LIFE		5,000,000 CYCLES	
REMARKS:		Waterproof Grade : IP67					

SCHEMATIC



RECOMMENDED P.C.B LAYOUT


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen	2018.10.04	TITLE TACT SWITCH
			CHECKED			
	UNIT mm	SCALE 10/1	REVIEWED	Landry Ju	2018.10.04	NO. ETC202-AA1G-52145TX
			APPROVALS	Dennis Hung	2018.10.04	

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS


RoHS Compliant

1.STRUCTURE AND MATERIALS

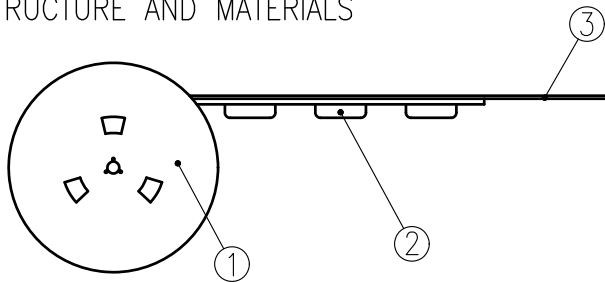

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 1,000 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180° .
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

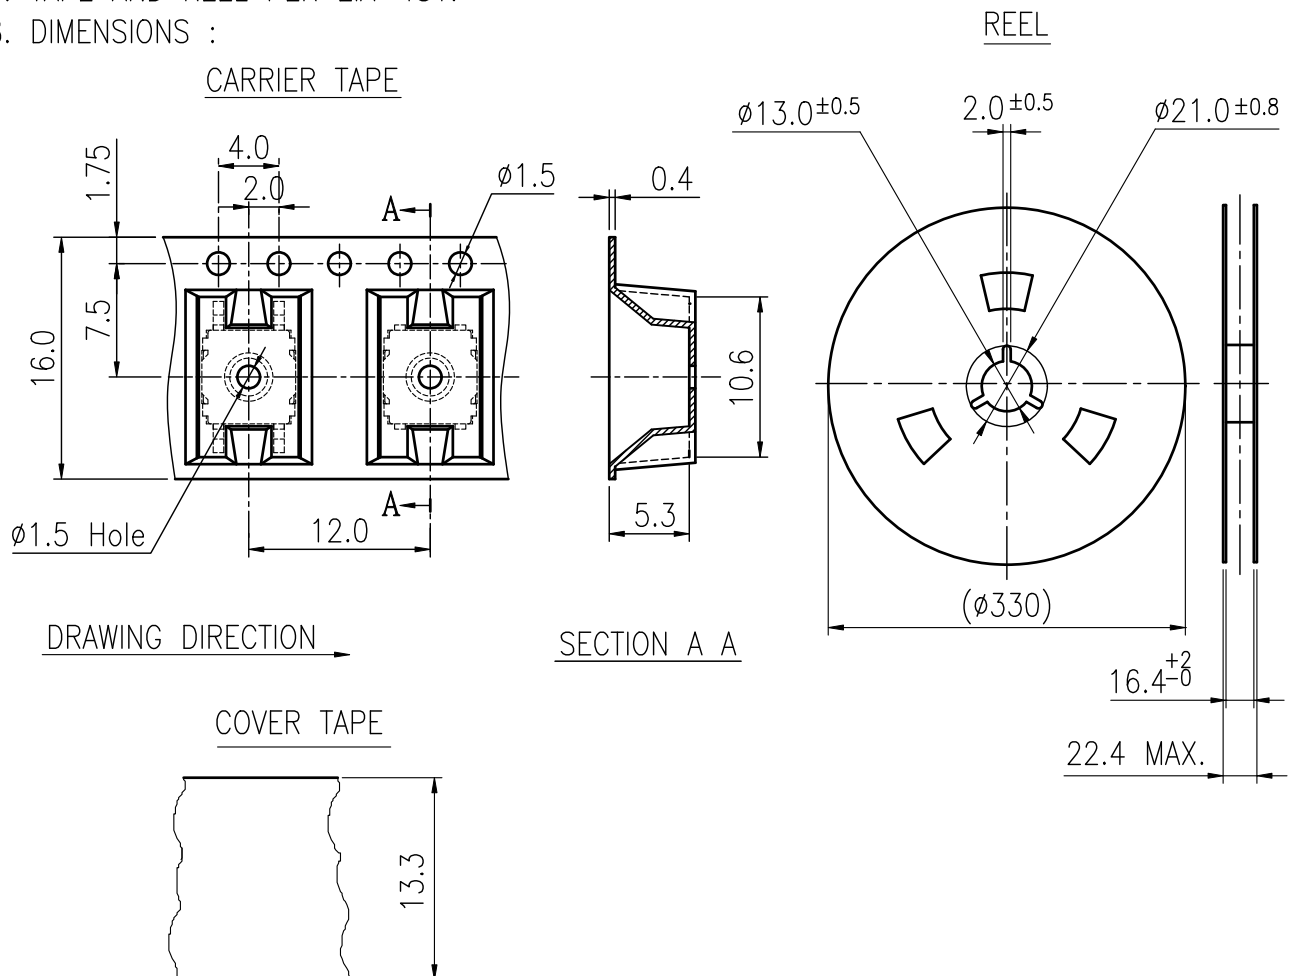

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
							Jane Shen	NTC202-AA1(G,U)-52145TX
							2017.03.31	PAGINATE.
								1/1
								SPEC NO.
								P-811
SYM	DISCRPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.