

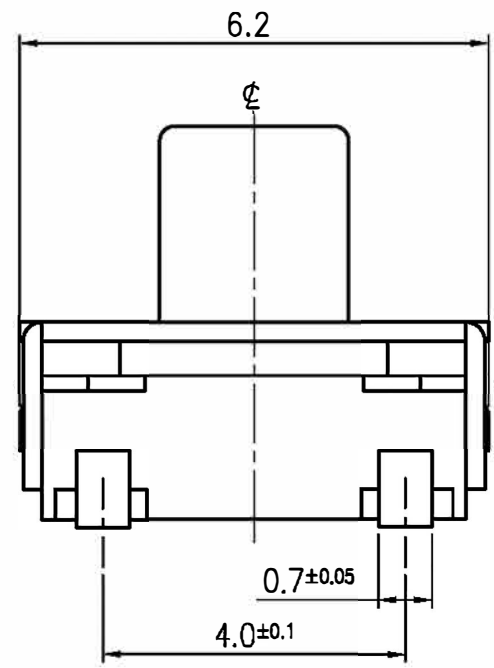
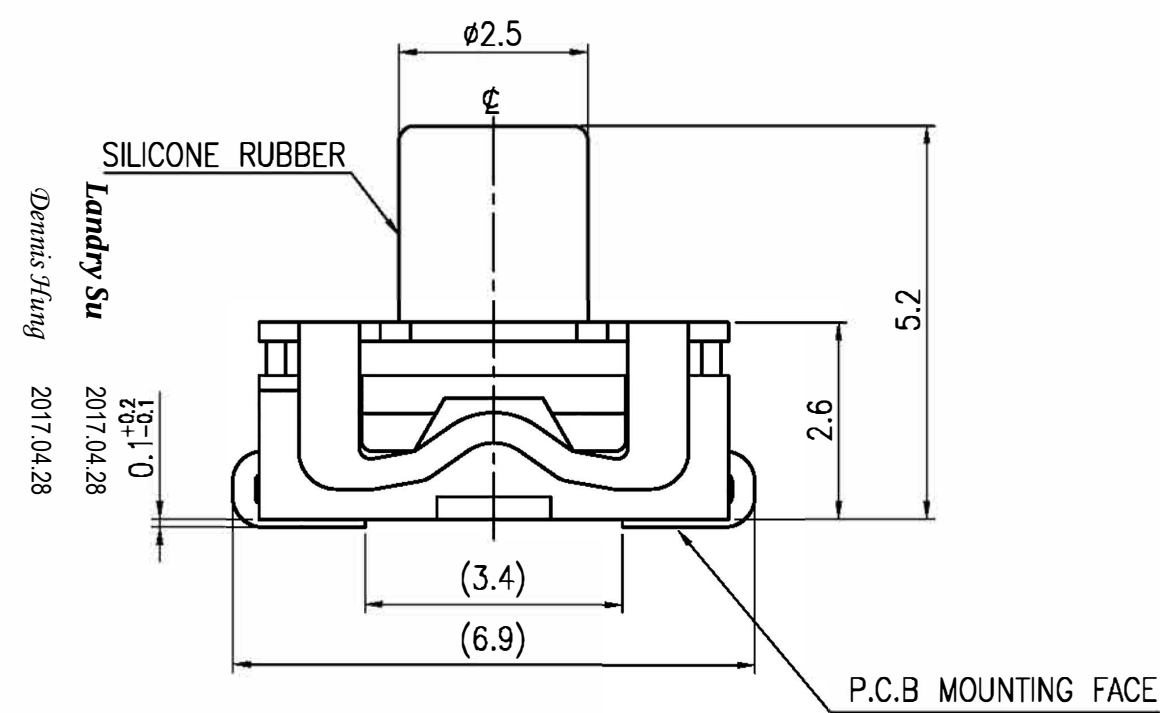



RoHS Compliant

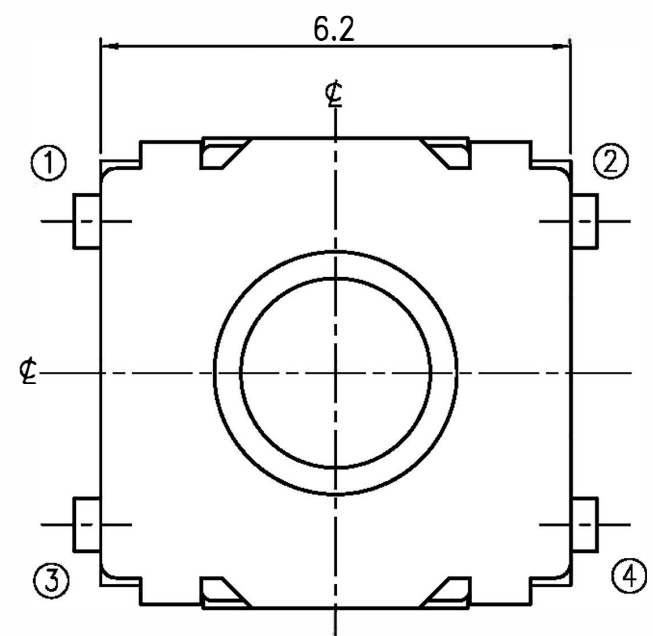

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2017.04.07	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC32V 50mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)		200±50qf	
INSULATION RESISTANCE		DC100V-1000MΩ MIN.		STROKE (ANGLE)		0.6±0.25mm	
WITHSTAND VOLTAGE		AC250V-1 MINUTE.		LIFE		500,000 CYCLES	
REMARKS:		Waterproof Grade : IP67					



RECOMMENDED P.C.B LAYOUT

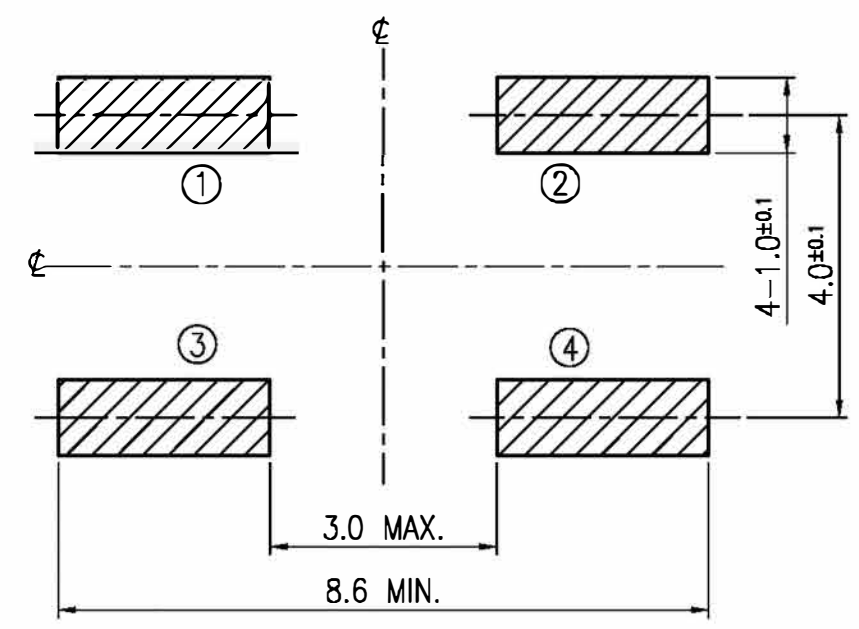

HATCHED AREA SHOWS SOLDERING LAND


TOLERANCES UNLESS OTHERWISE SPECIFIED \pm 0.2			SIGNATURES		DATE	MODEL
	UNIT mm	SCALE 10/1	DRAWER Jane Shen		2017.04.28	TITLE TACT SWITCH
			CHECKED			
			REVIEWED			NO. ETC202-AA1U-52200T
			APPROVALS			

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS


RoHS Compliant

1.STRUCTURE AND MATERIALS

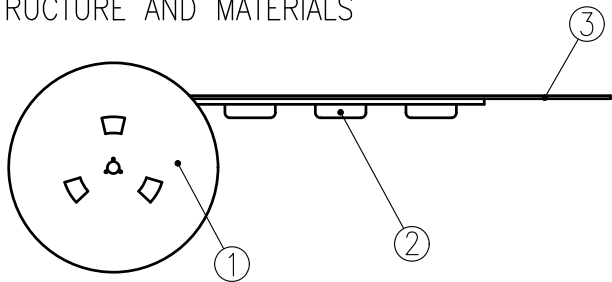

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 1,000 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180° .
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

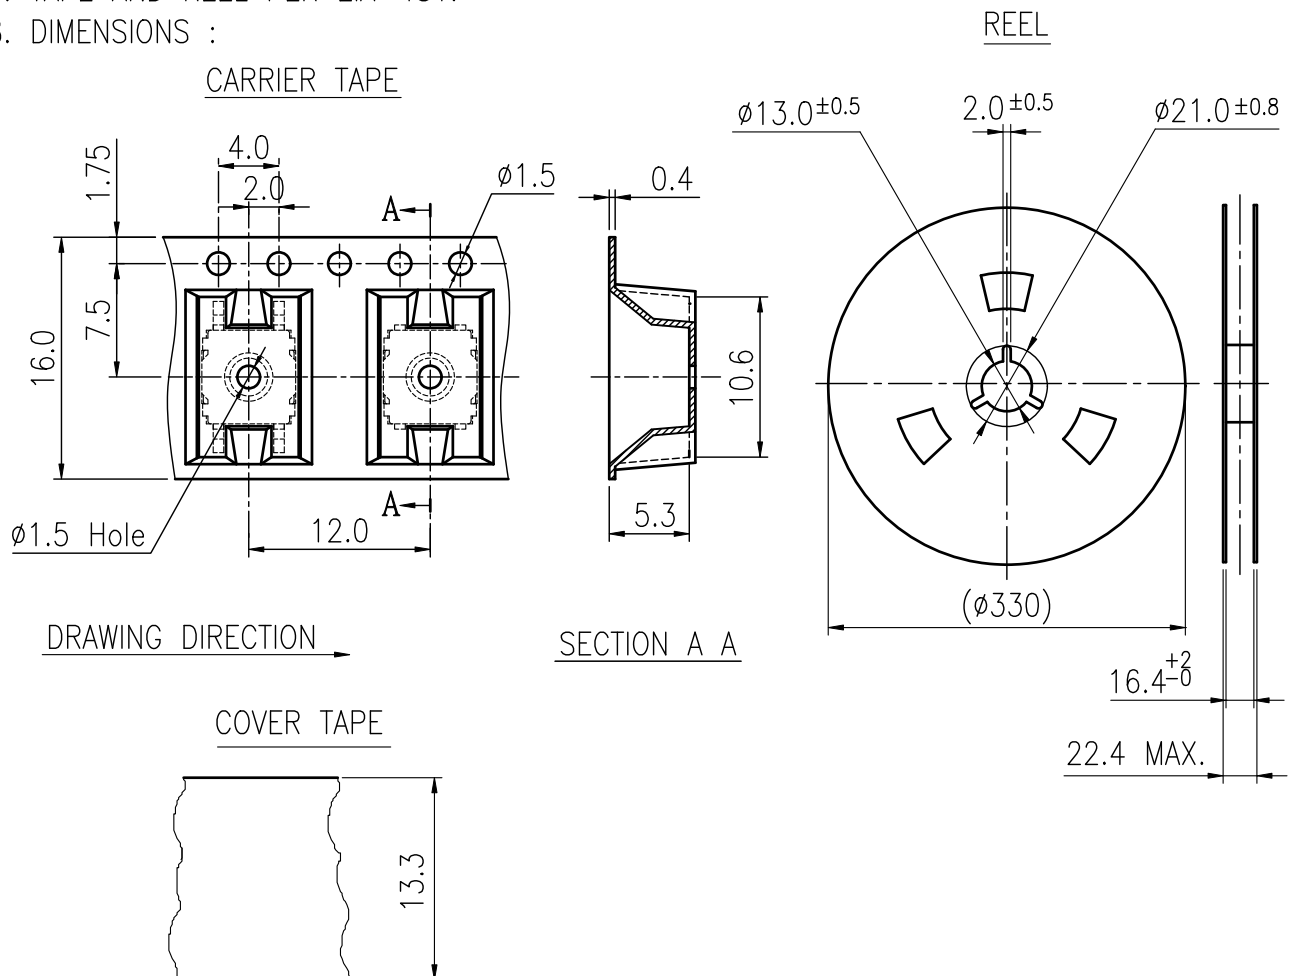

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
							Jane Shen	NTC202-AA1(G,U)-52
							2017.03.31	PAGINATE.
								1/1
								SPEC NO.
								P-811
SYM	DISCRIPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.