

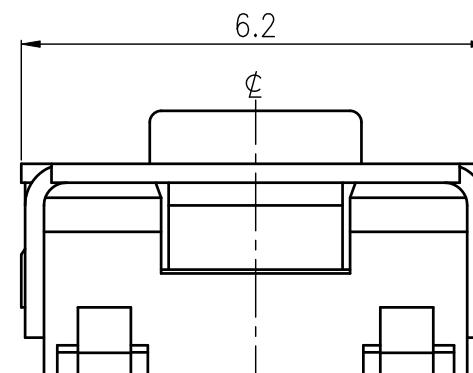
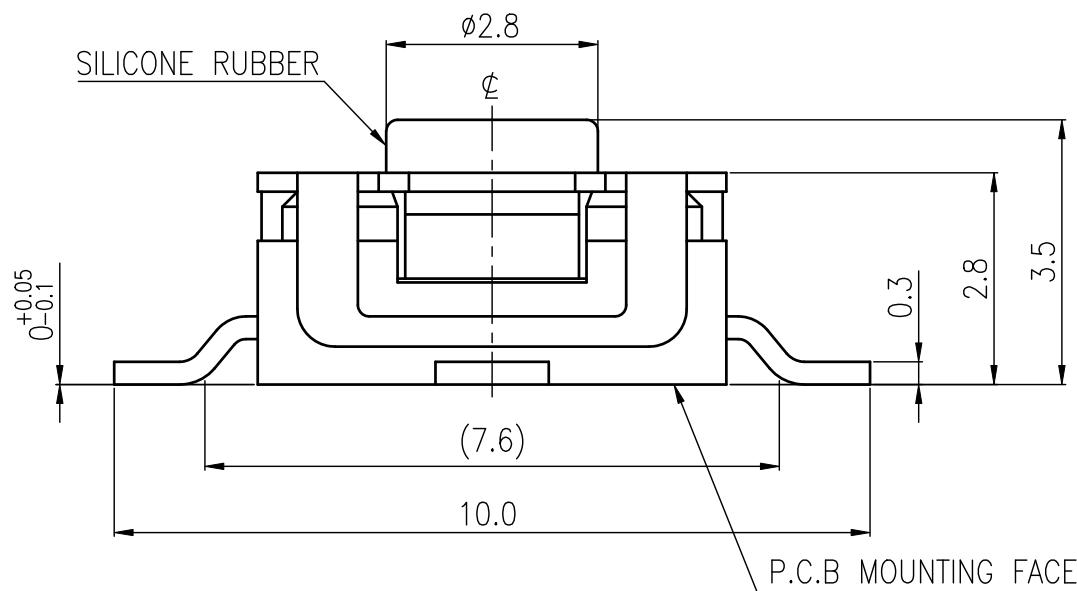


RoHS Compliant

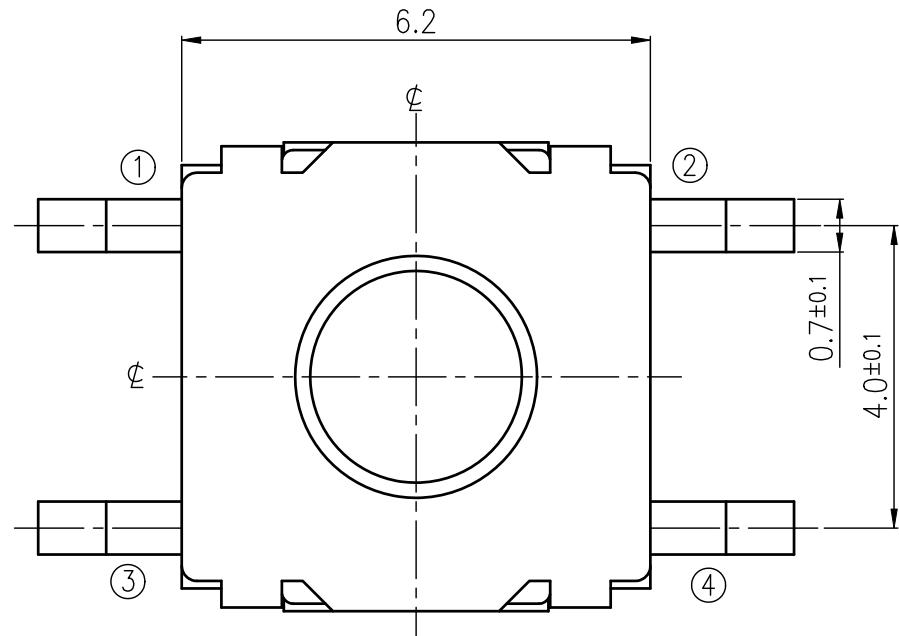


REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2017.10.16	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING	DC32V 50mA	TIMING					
CONTACT RESISTANCE	100mΩ MAX.	OPERATION (TORQUE)					
INSULATION RESISTANCE	DC100V-1000MΩ MIN.	STROKE (ANGLE)					
WITHSTAND VOLTAGE	AC250V-1 MINUTE.	LIFE					CYCLES
REMARKS:	Waterproof Grade : IP67						

SCHEMATIC

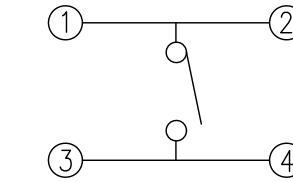

RECOMMENDED P.C.B LAYOUT

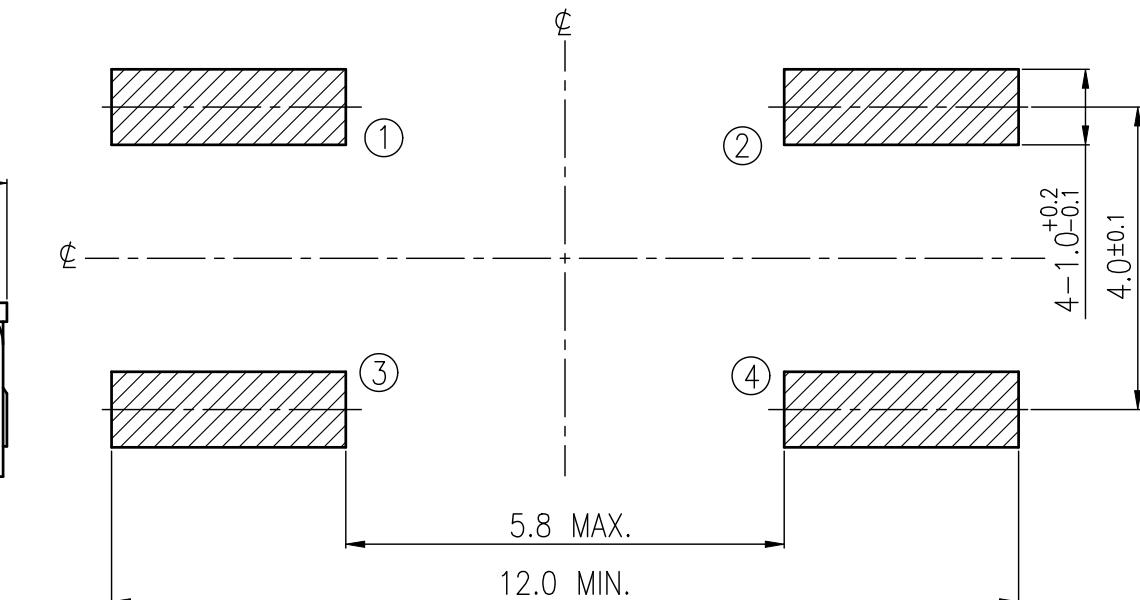

HATCHED AREA SHOWS SOLDERING LAND

MODEL NO.	OPERATING FORCE	STROKE	LIFE
ETC202-CC1G-35200T	200±50gf	0.35+0.3 - 0.1	1,000,000
ETC202-CC1G-35350T	350±90gf	0.5±0.3	500,000


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES	DATE	MODEL
			DRAWER	Jane Shen	TITLE TACT SWITCH
CHECKED <i>Landry Su</i>			2021.01.07		
UNIT mm	SCALE 10/1	REVIEWED			NO. SEE MODEL NO.
		APPROVALS Qiuyuan Chuang	2021.01.07		

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS



RoHS Compliant

1. STRUCTURE AND MATERIALS

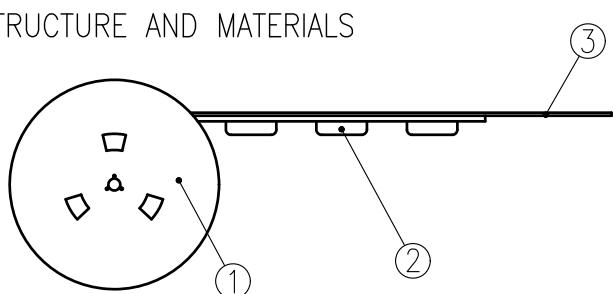


NO.	PARTS NAME	MATERIALS
③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE

- PACKAGING QUANTITY : 1,500 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCEPTABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180°.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

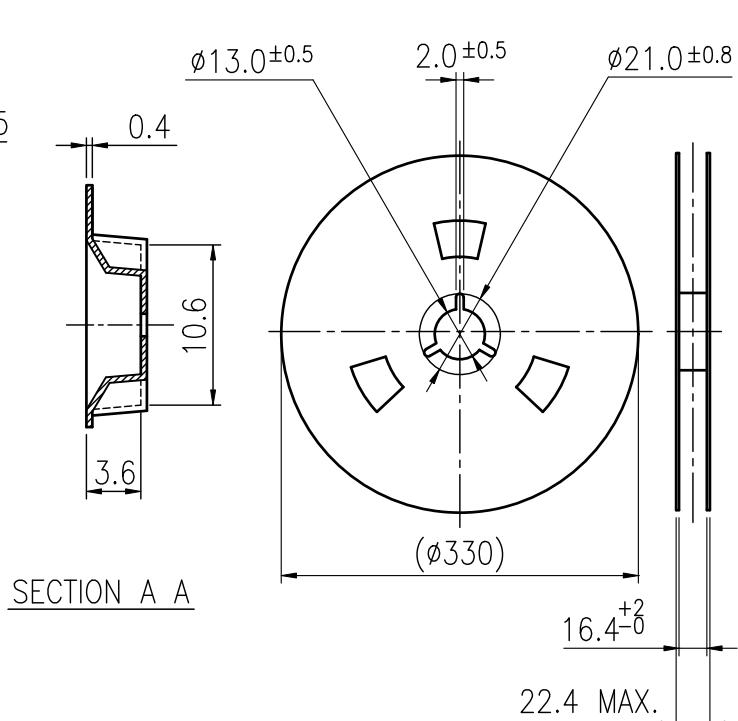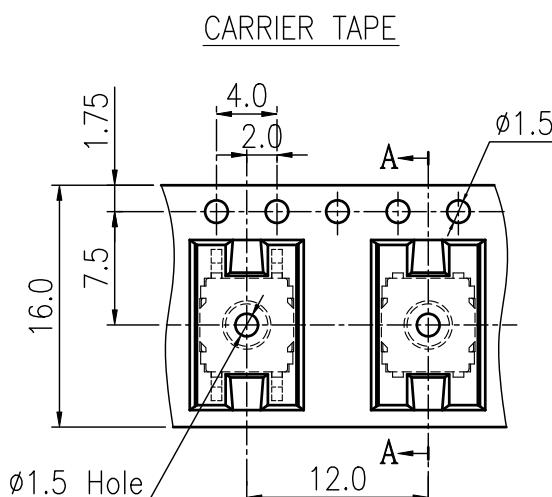

COVER TAPE

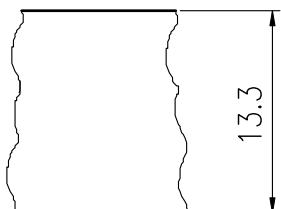

SYM	DISCRIPTION	DATE	APPROVED	APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
				Qiu Yuan Chuang			Jane Shen	NTC_202-CC_(G,U)-35
								PAGINATE. 1/1 SPEC NO. P-812