

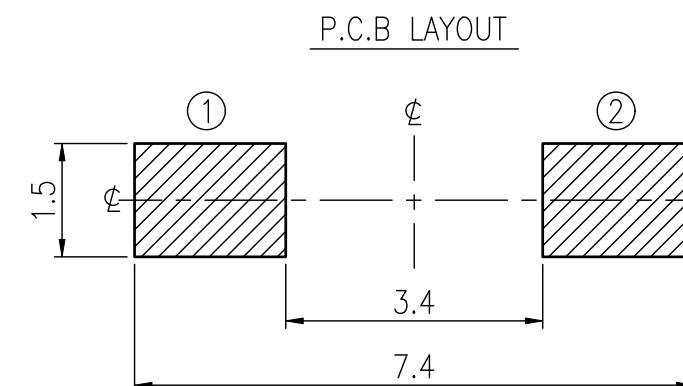
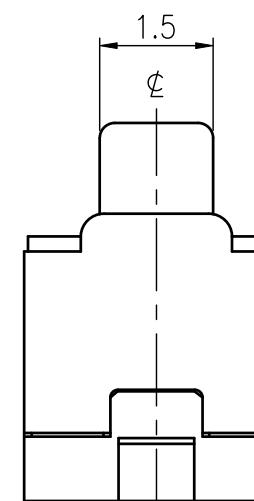


RoHS Compliant

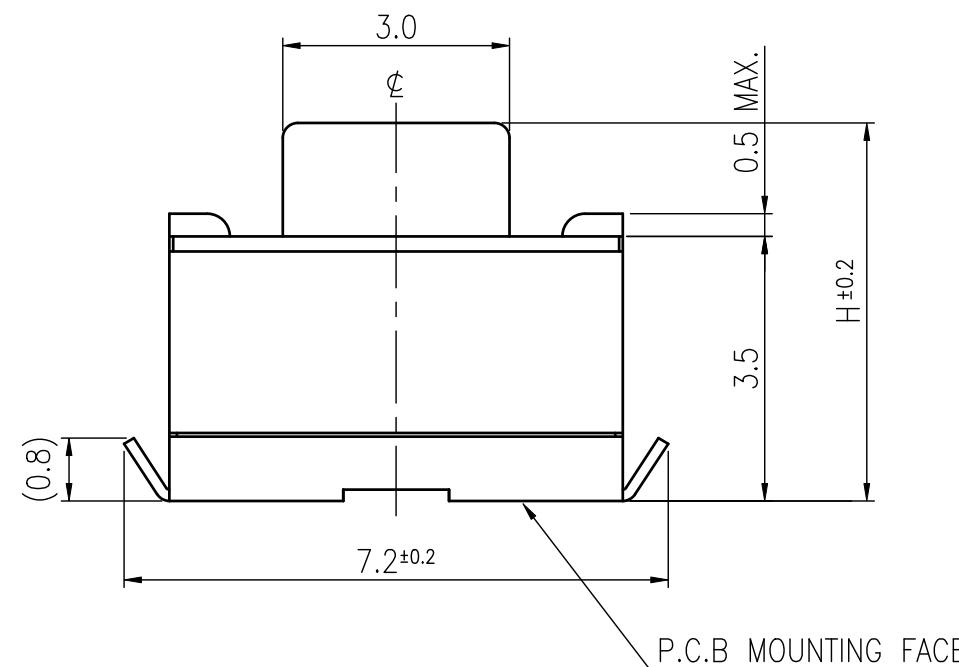

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	<u>Initial Drawing</u>	2019.09.03	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING	DC12V 50mA		TIMING				
CONTACT RESISTANCE	100mΩ MAX.		OPERATION (TORQUE)				
INSULATION RESISTANCE	DC500V – 100MΩ MIN.		STROKE (ANGLE)		0.15±0.1 mm		
WITHSTAND VOLTAGE	AC250V – 1 MINUTE		LIFE			CYCLES	
REMARKS:	Waterproof Grade : IP67						

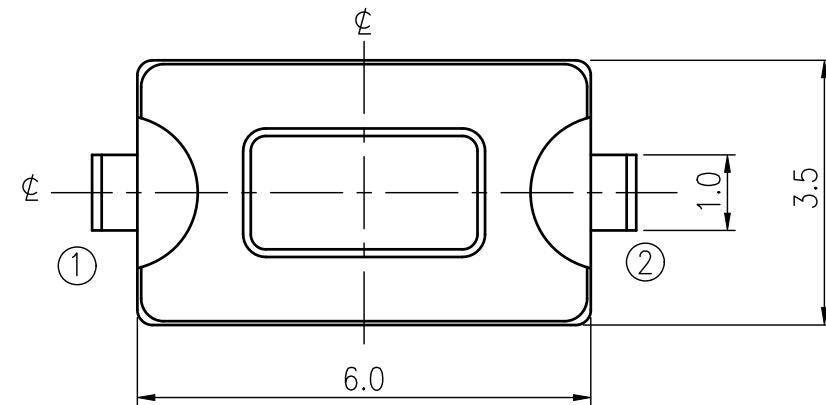


MODEL NO.	H	OPERATING FORCE	LIFE
ETC203-AT1J-A160T	4.3	160±50gf	50,000
ETC203-AT1J-B160T	5.0	160±50gf	50,000
ETC203-AT1J-A260T	4.3	260±70gf	30,000
ETC203-AT1J-B260T	5.0	260±70gf	30,000

TOLERANCES UNLESS OTHERWISE SPECIFIED ± 0.1			SIGNATURES		DATE	MODEL		
			DRAWER	Jane Shen	2019.09.03	TITLE	TACT SWITCH	
			CHECKED	<i>Landry Su</i>	2019.09.03			
	UNIT mm	SCALE 10/1	REVIEWED			NO. See Model No.		
			APPROVALS		<i>Qiyuan Chuang</i>		2019.09.03	

THE PACKING SPECIFICATIONS


RoHS Compliant

1. STRUCTURE AND MATERIALS

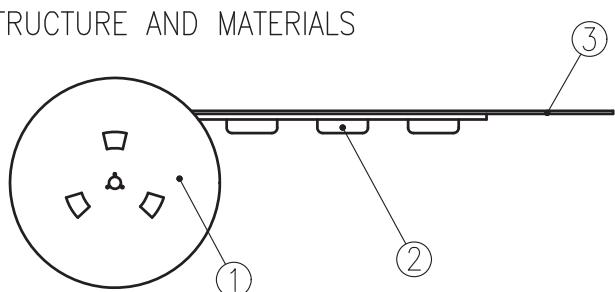

NO.	PARTS NAME	MATERIALS
③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE

- PACKAGING QUANTITY : 1,800 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCEPTABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN $165^\circ \sim 180^\circ$.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

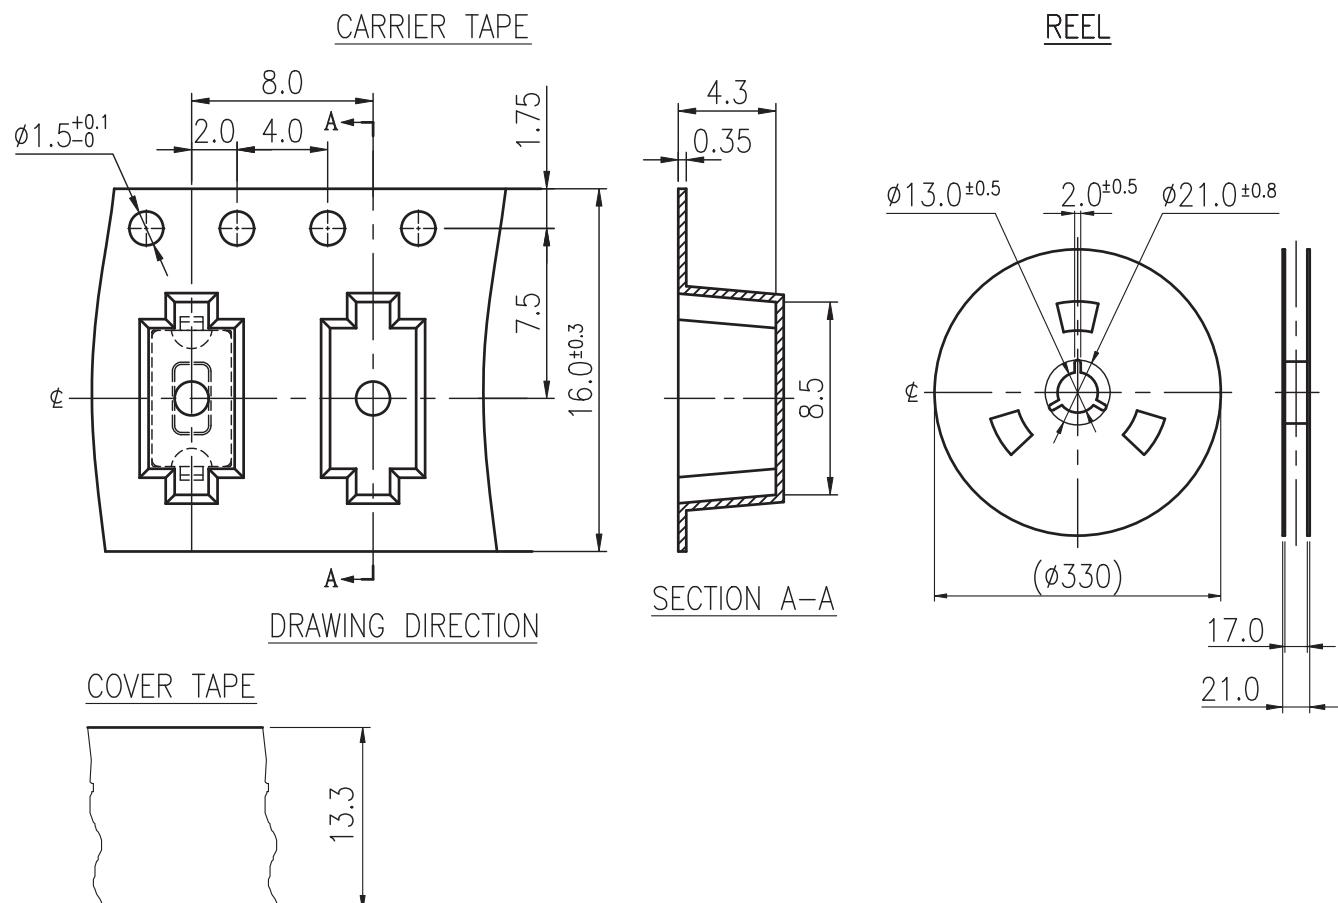

SYM	DESCRIPTION	DATE	APPROVED	APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
				Dennis Hung			Jane Shen	NTC203-AT1J-A
								PAGINATE: 1/1 SPEC NO. P-113