
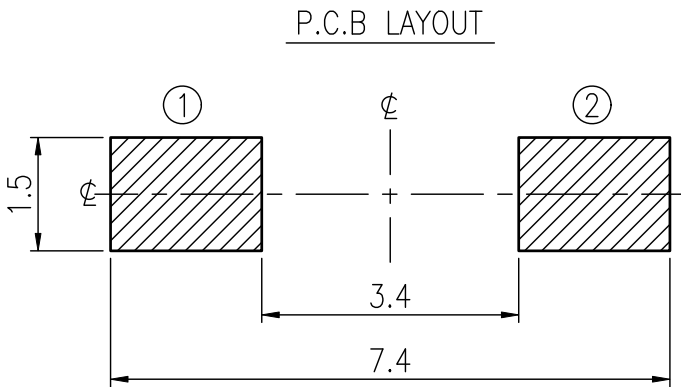
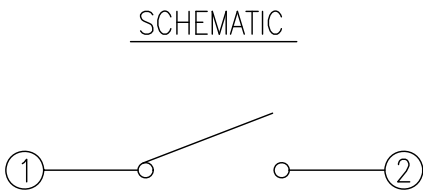
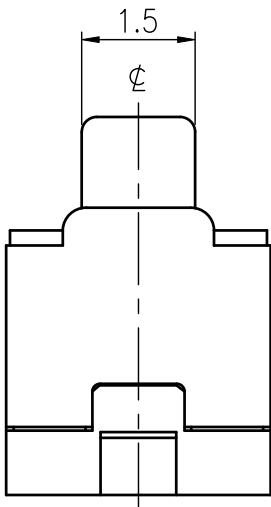
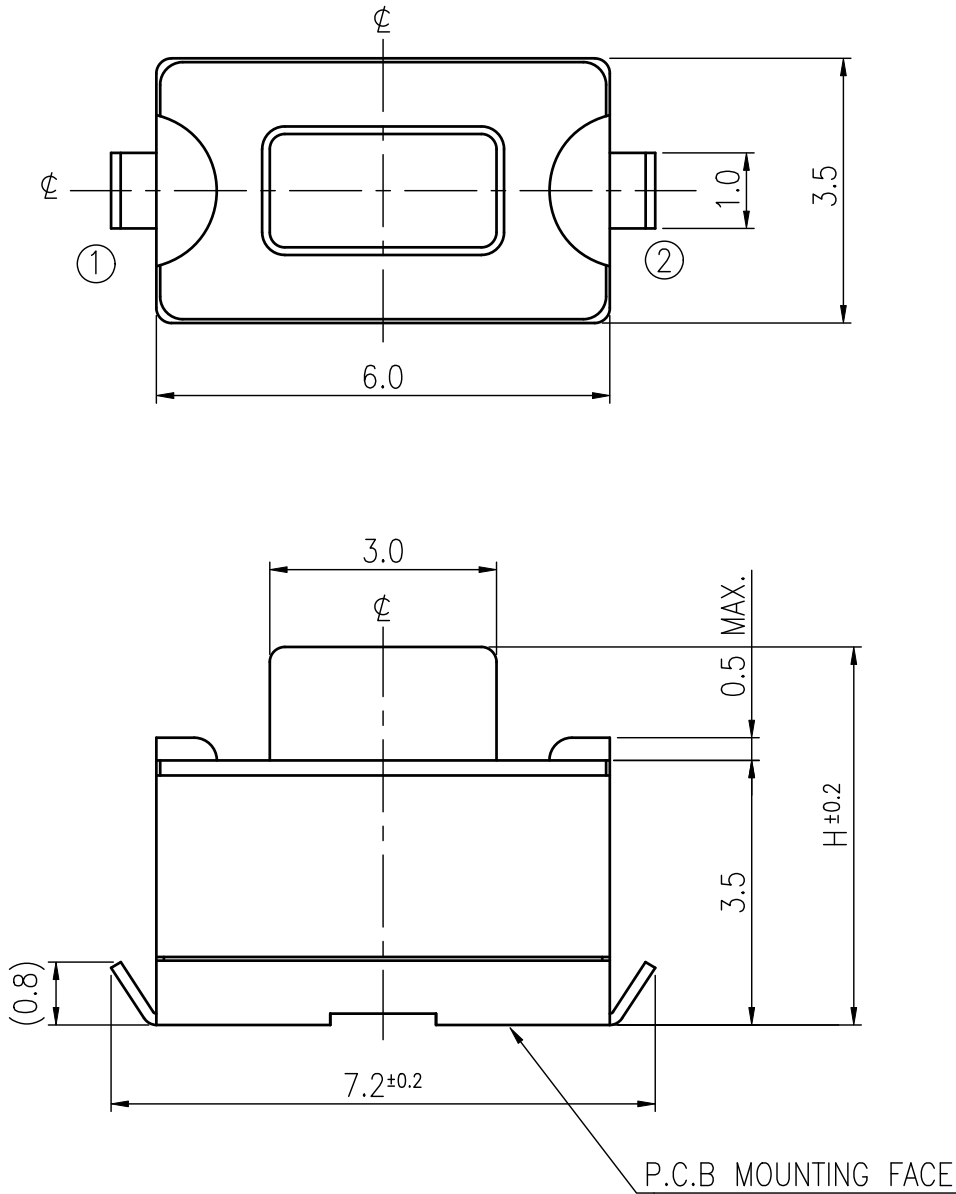


RoHS Compliant



MODEL NO.	H	OPERATING FORCE	LIFE
ETC203-AT1J-A160T	4.3	160±50gf	50,000
ETC203-AT1J-B160T	5.0	160±50gf	50,000
ETC203-AT1J-A260T	4.3	260±70gf	30,000
ETC203-AT1J-B260T	5.0	260±70gf	30,000


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1	SIGNATURES		DATE	MODEL	
	DRAWER	Jane Shen	2019.09.03	TITLE TACT SWITCH	
	CHECKED	Landry Su	2019.09.03		
	REVIEWED			NO. See Model No.	
	APPROVALS	Qiuyuan Chuang	2019.09.03		

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS

RoHS Compliant


1.STRUCTURE AND MATERIALS

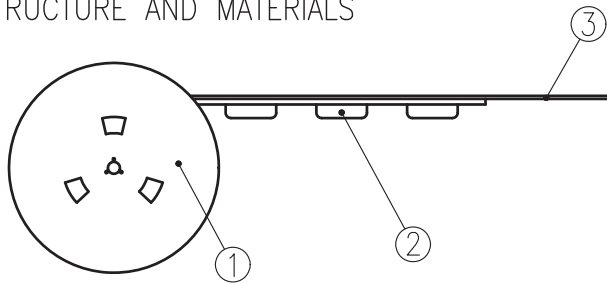

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS


- PACKAGING QUANTITY : 1,800 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180 °.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

CARRIER TAPE

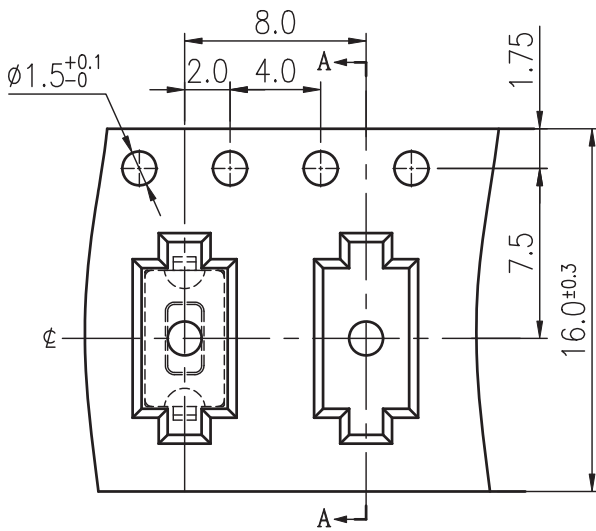


DRAWING DIRECTION

COVER TAPE



REEL

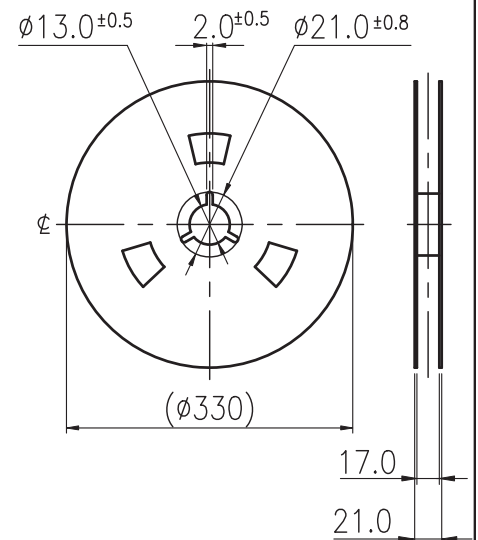

SECTION A-A

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
							Jane Shen	NTC203-AT1J-A
								PAGINATE.
								1/1
								SPEC NO.
								P-113
SYM	DISCRIPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.