
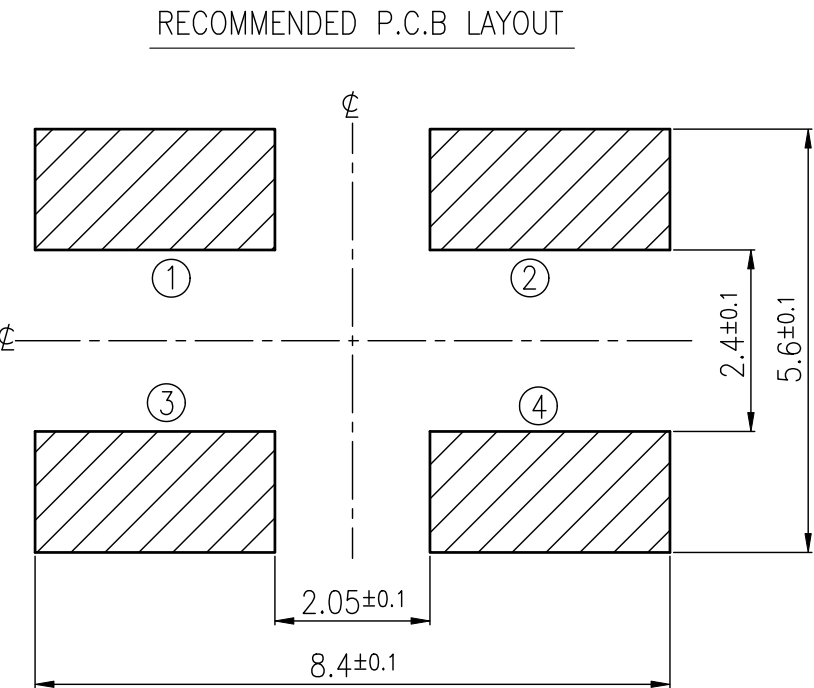
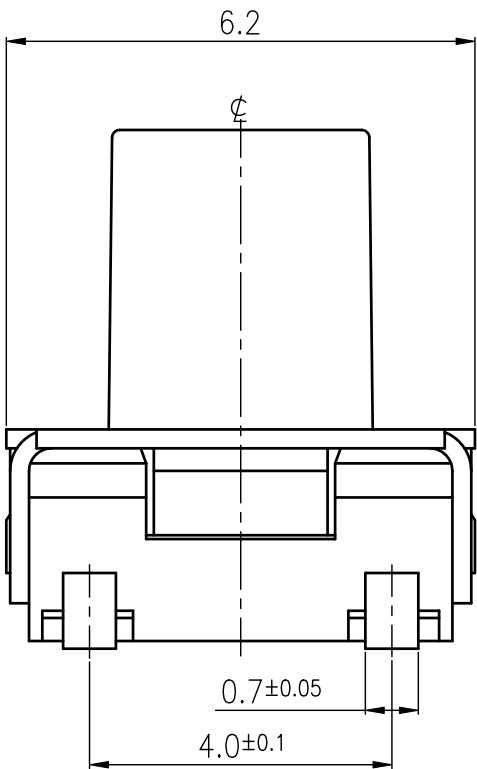
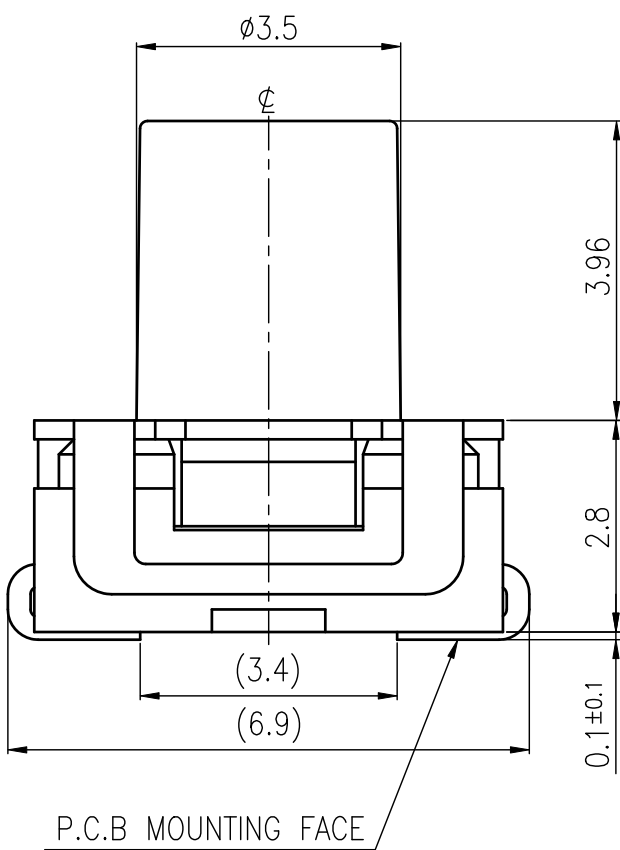



RoHS Compliant

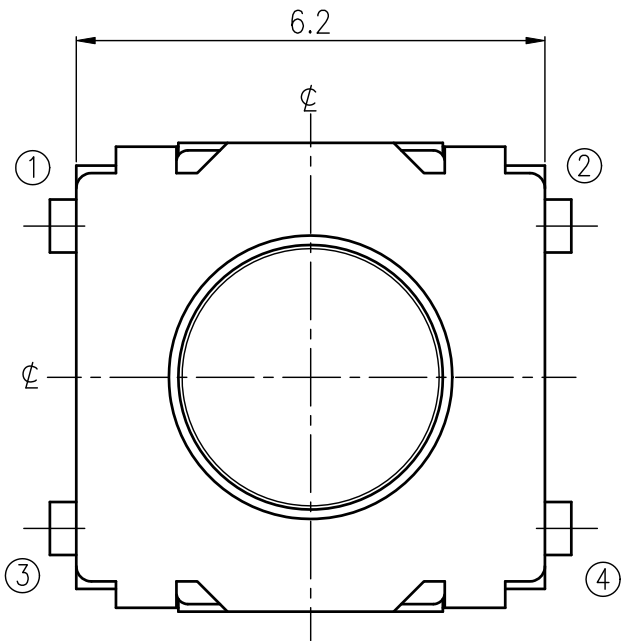

HATCHED AREA SHOWS SOLDERING LAND

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2017.10.31	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		1VA DC32V MAX.		TIMING			
CONTACT RESISTANCE		50mΩ MAX.		OPERATION (TORQUE)		240±50 gf	
INSULATION RESISTANCE		DC100V–1000MΩ MIN.		STROKE (ANGLE)		0.4±0.2 mm	
WITHSTAND VOLTAGE		AC250V–1 MINUTE.		LIFE		100,000 CYCLES	
REMARKS:		Waterproof Grade : IP57					

SCHEMATIC



RECOMMENDED P.C.B LAYOUT


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen	2021.01.07	TITLE TACT SWITCH
			CHECKED	Landry Su	2021.01.07	
	UNIT mm	SCALE 10/1	REVIEWED			NO. ETC224-AA1U-A240T
			APPROVALS		Qiuyuan Chuang 2021.01.07	

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS


RoHS Compliant

1. STRUCTURE AND MATERIALS

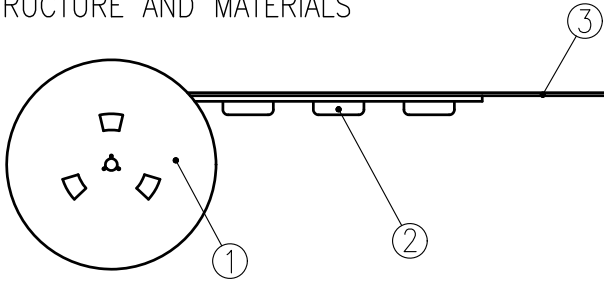

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 800 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCEPTABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180°.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

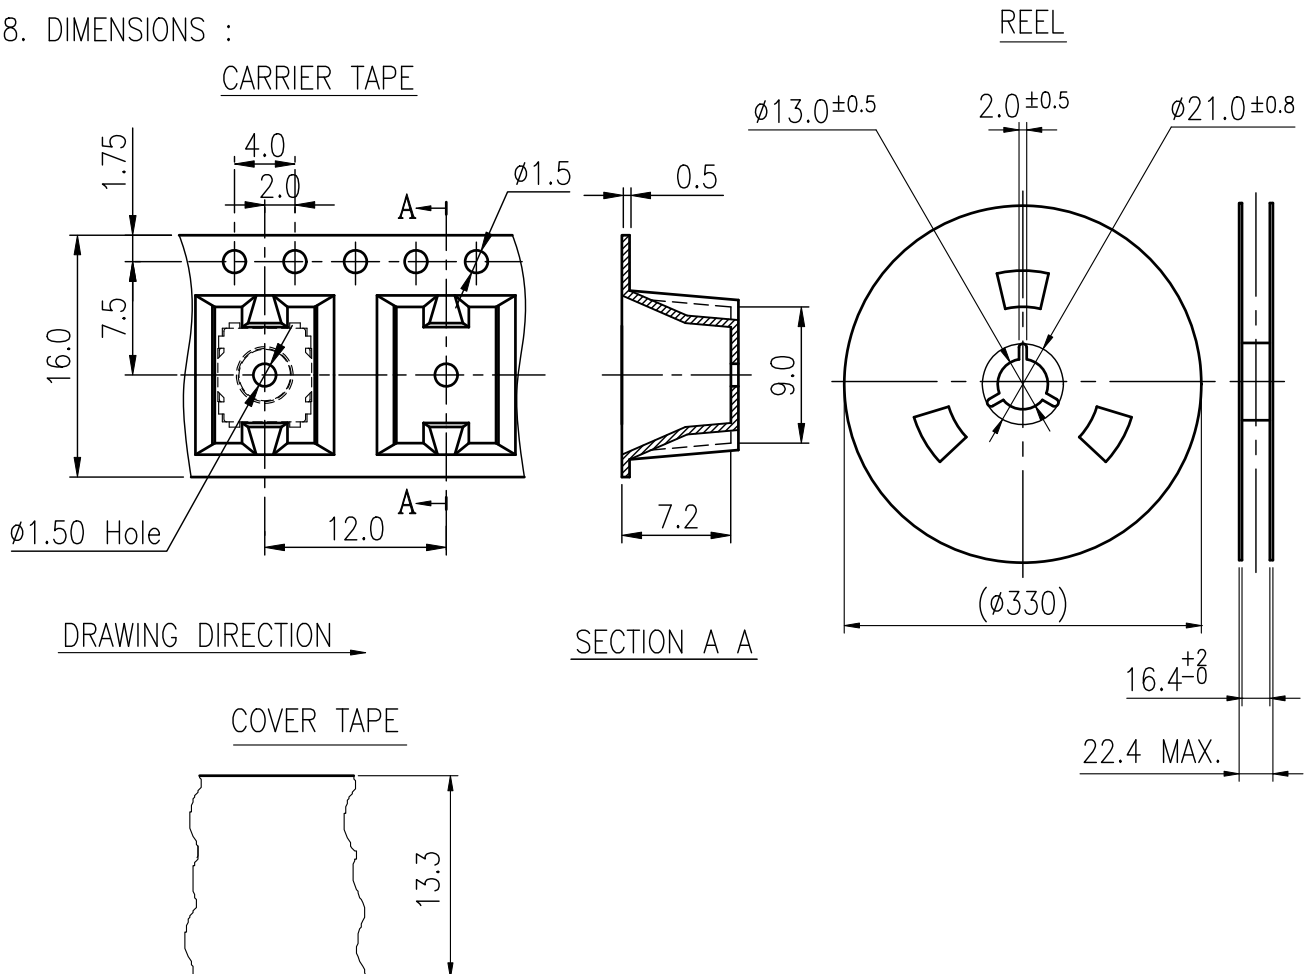

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
				Qinyuan Chuang			Jane Shen	NTC_224-AA_U-A
								PAGINATE.
								1/1
								SPEC NO.
								P-827
SYM	DISCRIPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.