
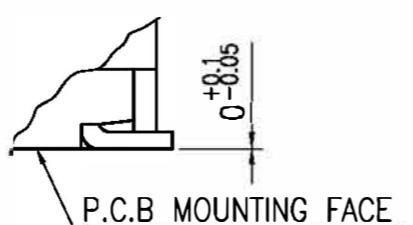
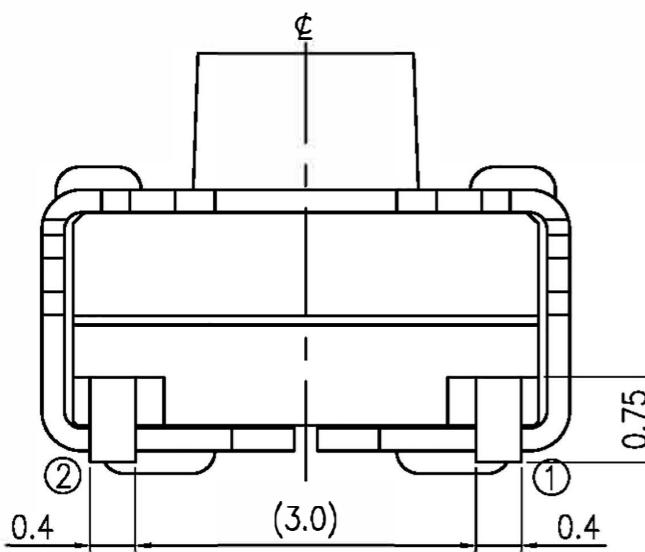
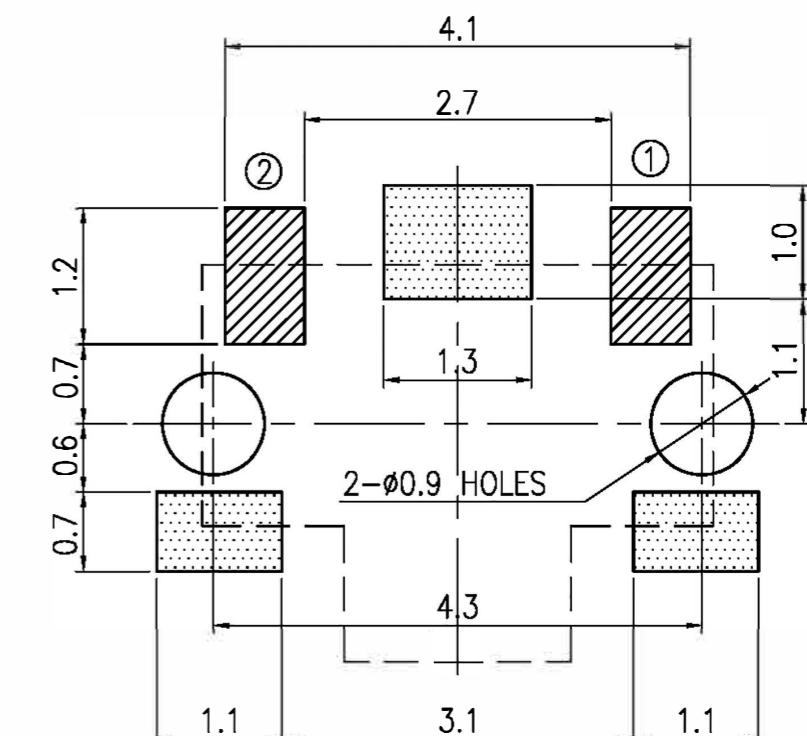
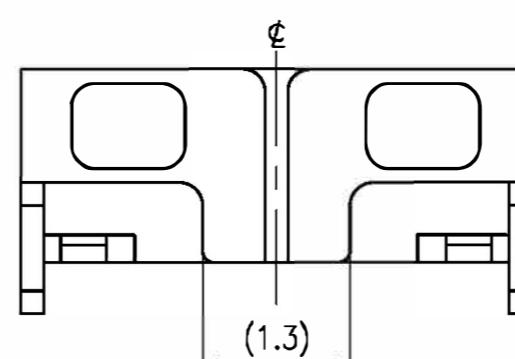
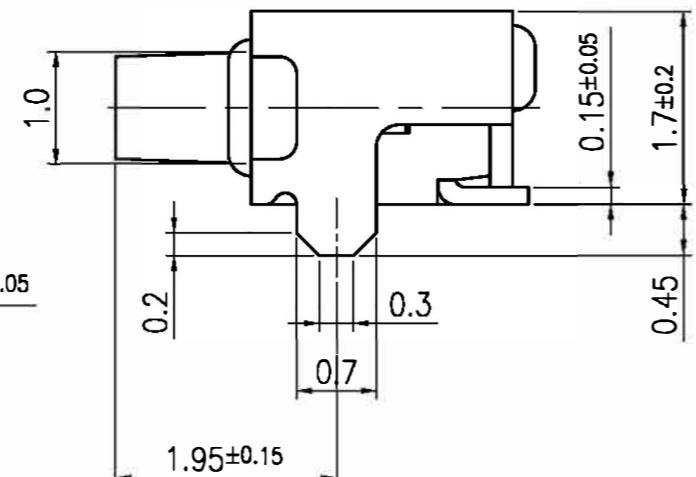
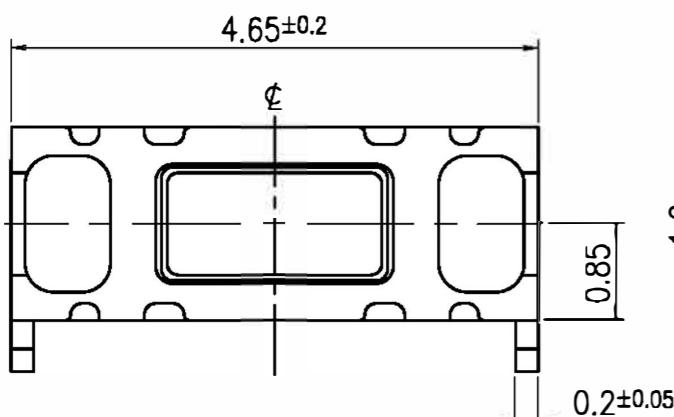
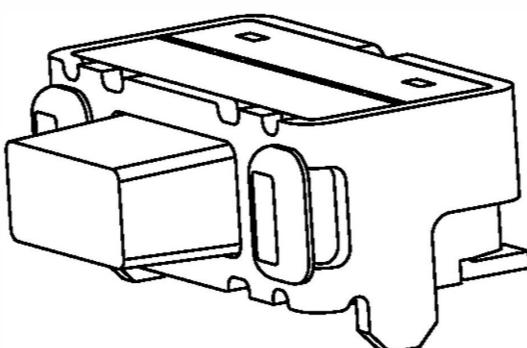


RoHS Compliant

Only

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2012.11.06	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING	DC12V 50mA	TIMING					
CONTACT RESISTANCE	100mΩ MAX.	OPERATION (TORQUE)	160±50 gf				
INSULATION RESISTANCE	DC500V-100MΩ MIN.	STROKE (ANGLE)	0.2±0.1 mm				
WITHSTAND VOLTAGE	AC250V-1 MINUTE	CONTACT RESISTANCE	2Ω MAX.				
REMARKS:		(AFTER 100,000 CYCLES LIFE TEST)					

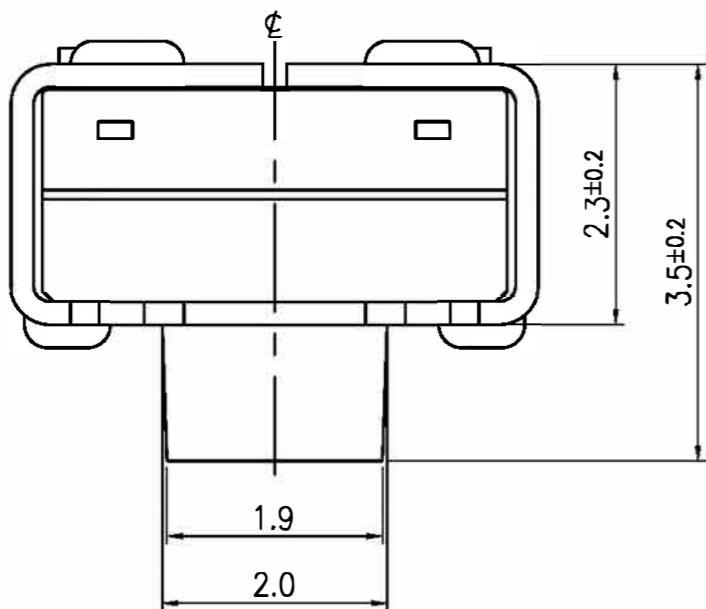

TERMINALS DETAIL

Marked patterns (three points) are used for fixing the switches.  
Do not connect them other circuits.


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen		
	CHECKED				2012.11.06	TITLE
	UNIT mm	SCALE 15/1	REVIEWED			TACT SWITCH
			APPROVALS			NO.

TAIWAN MISAKI ELECTRONICS CO., LTD.

# THE PACKING SPECIFICATIONS


RoHS Compliant

## 1. STRUCTURE AND MATERIALS

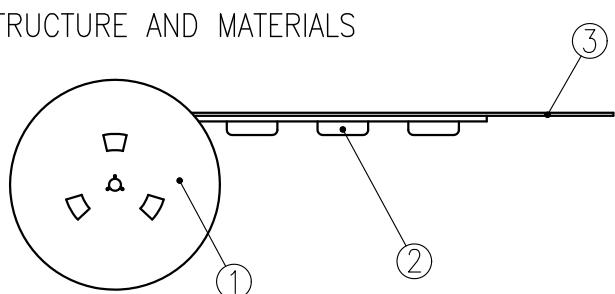

NO.	PARTS NAME	MATERIALS
③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE

- PACKAGING QUANTITY : 2,500 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCEPTABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 70 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180°.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481
- DIMENSIONS :

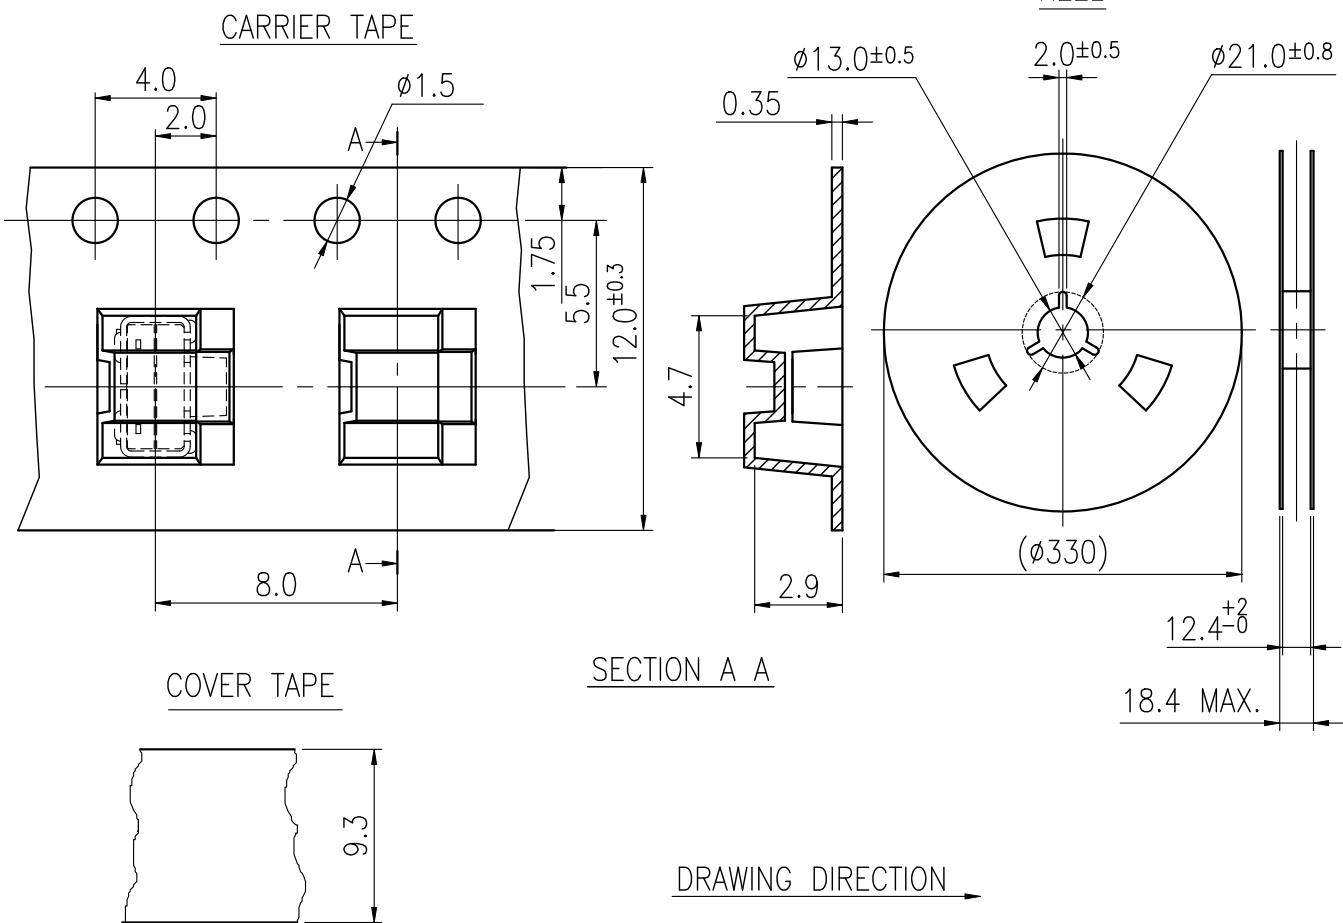

SYM	DESCRIPTION	DATE	APPROVED	APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
				Dennis	Hung		Jane Shen	NTC501-BG1G
								PAGINATE. 1/1
								SPEC NO. P-468