

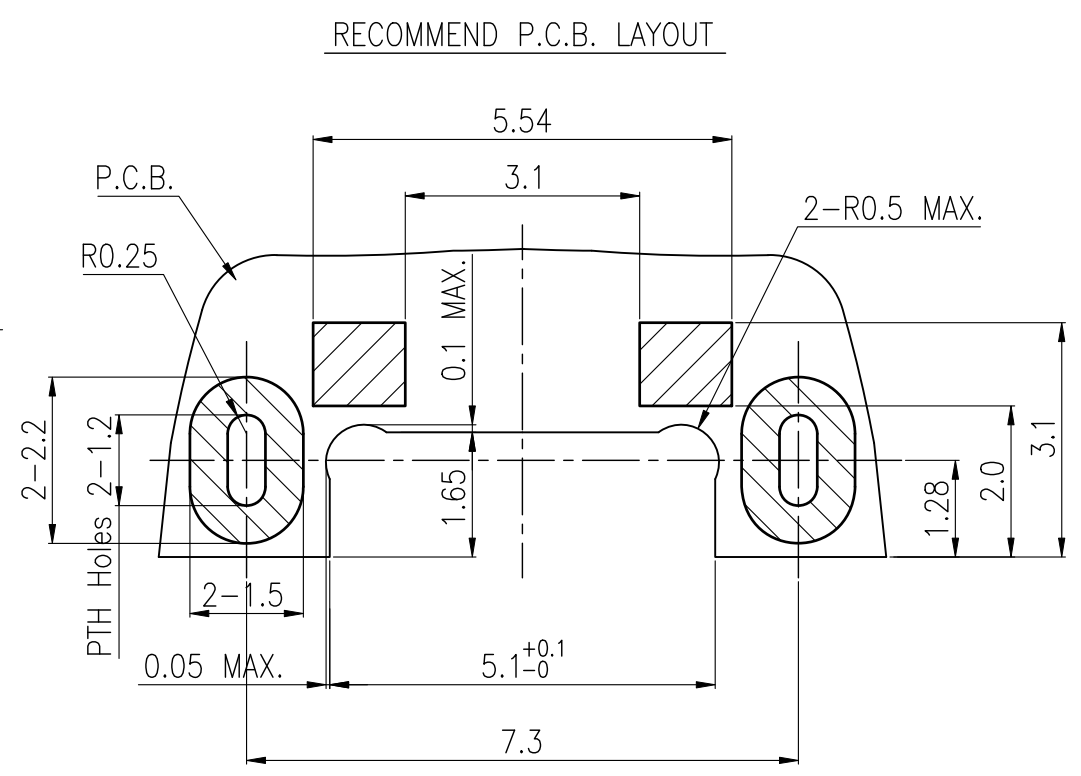
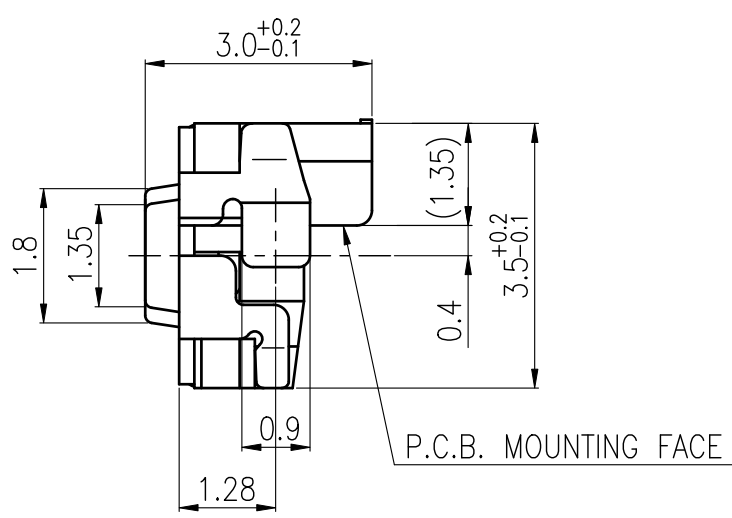


RoHS Compliant

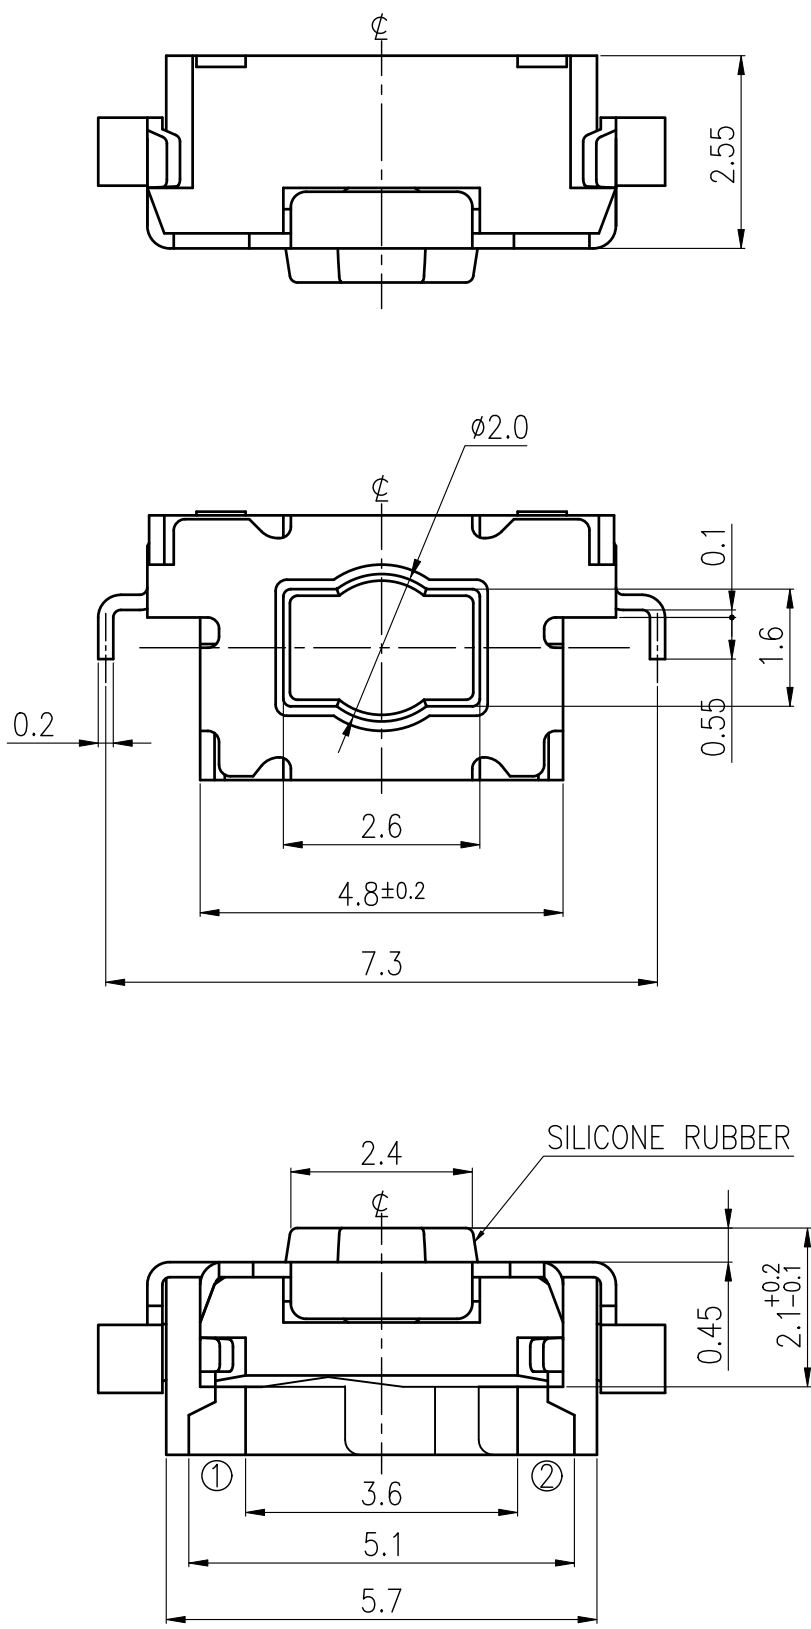

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2025.02.24	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)		160±50 gf	
INSULATION RESISTANCE		DC500V-100MΩ MIN.		STROKE (ANGLE)		0.25±0.1 mm	
WITHSTAND VOLTAGE		AC250V-1 MINUTE		CONTACT RESISTANCE		100,000 CYCLES	
REMARKS:							




TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen	2025.02.25	TITLE
			CHECKED			TACT SWITCH
	UNIT mm	SCALE 10/1	REVIEWED			NO.
			APPROVALS QiuYuan Chuang		2025.02.25	ETC302-G01-21160-TS

TAIWAN MISAKI ELECTRONICS CO., LTD.

# THE PACKING SPECIFICATIONS

RoHS Compliant


## 1. STRUCTURE AND MATERIALS

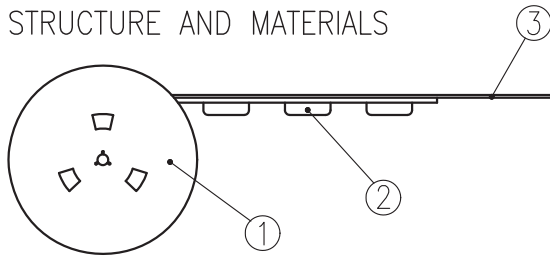

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGE QUANTITY : 1200 PCS/REEL.
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCEPTABLE BUT MORE THAN 3 RUNNIGE POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO **130** gf AND STRIPPING ANGLE SHOULD BE WITHIN 165°~180°.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :


### CARRIER TAPE

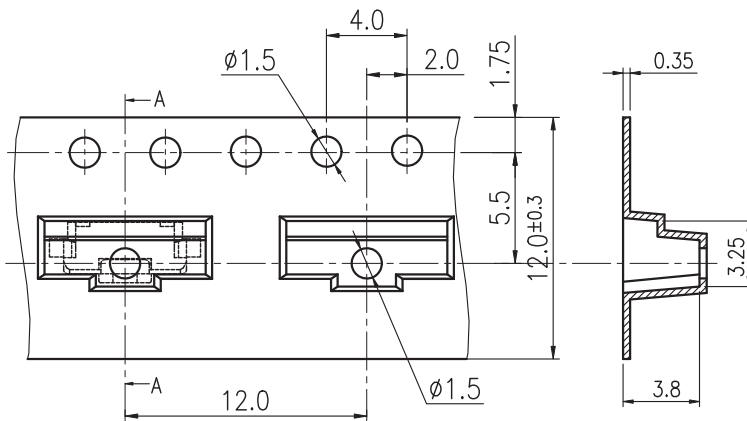


DRAWING DIRECTION

SECTION A A

### REEL

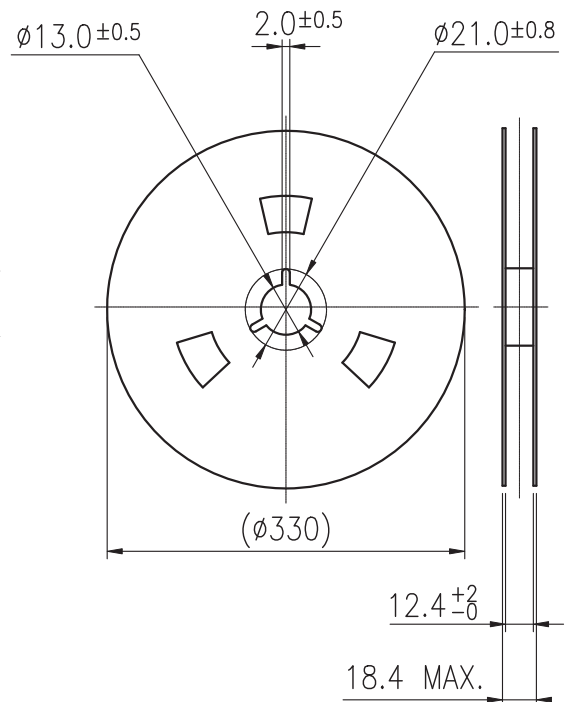

### COVER TAPE



				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
				<i>Dennis Hung</i>			Jane Shen	NTC302-G01-21160-TS
				2011.06.30			2011.06.30	PAGINATE.
SYM	DISCRIPTION	DATE	APPROVED					1/1
								SPEC NO.
								P-673

TAIWAN MISAKI ELECTRONICS CO.,LTD.