

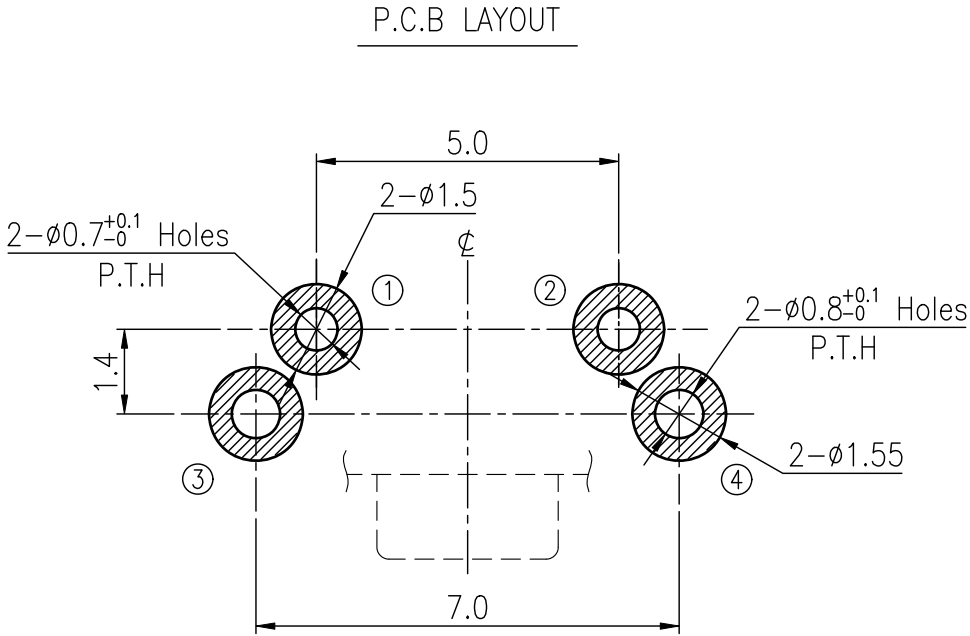
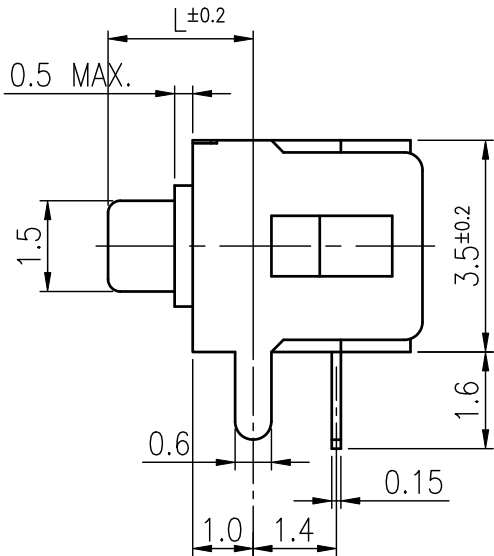
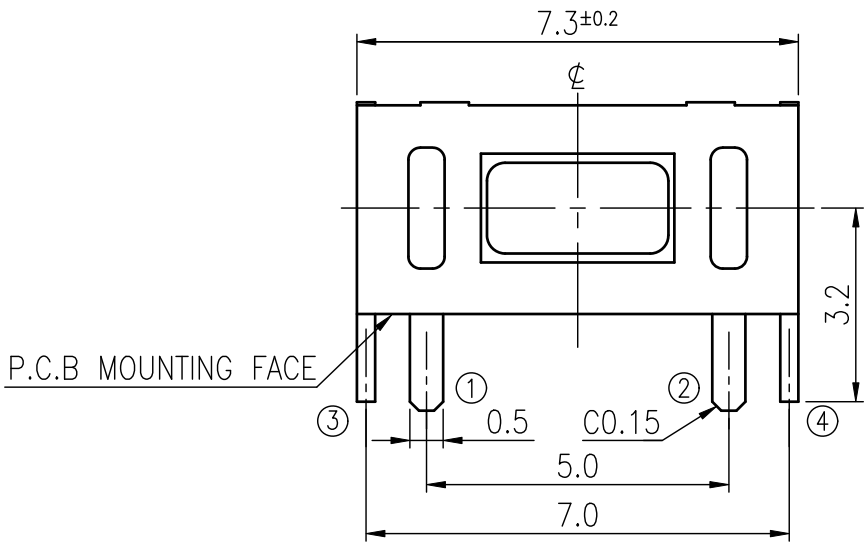
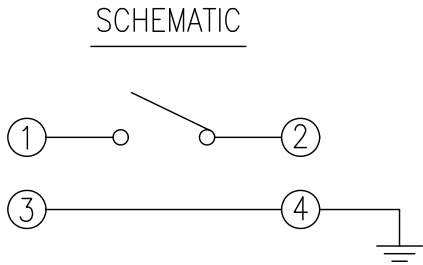



RoHS Compliant

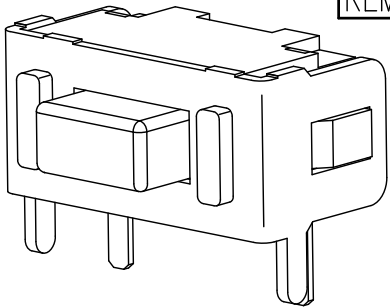

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2015.02.10	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
CONTACT RESISTANCE		500mΩ MAX.		OPERATION (TORQUE)			
INSULATION RESISTANCE		DC500V-100MΩ MIN.		STROKE (ANGLE)		0.15±0.1mm	
WITHSTAND VOLTAGE		AC250V-1 MINUTE		CONTACT RESISTANCE		1Ω MAX.	
REMARKS:				(AFTER 100,000 CYCLES LIFE TEST)			

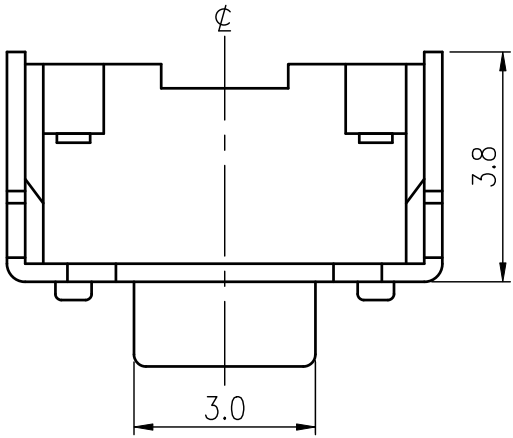

HATCHED AREA SHOWS SOLDERING LAND

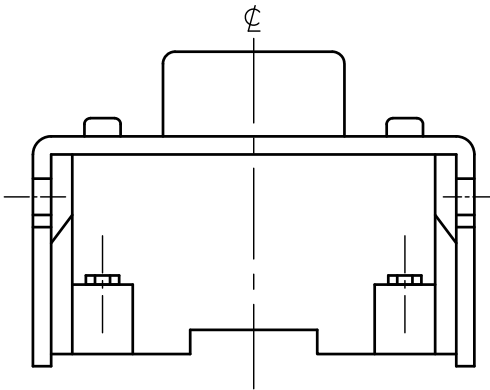

MODEL NO.	H	OPERATING FORCE
ETC303-BD1T-L180T	1.7	180±50gf
ETC303-BD1T-M180T	2.4	180±50gf
ETC303-BD1T-P180T	4.0	180±50gf
ETC303-BD1T-L250T	1.7	250±50gf
ETC303-BD1T-M250T	2.4	250±50gf


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen	2015.02.10	TITLE TACT SWITCH
			CHECKED	Jamie Li	2015.05.27	
	UNIT mm	SCALE 8/1	REVIEWED			NO. See Model No.
			APPROVALS	Dennis Hung	2015.05.27	

TAIWAN MISAKI ELECTRONICS CO., LTD.

RoHS Compliant

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- CARRIER TAPE

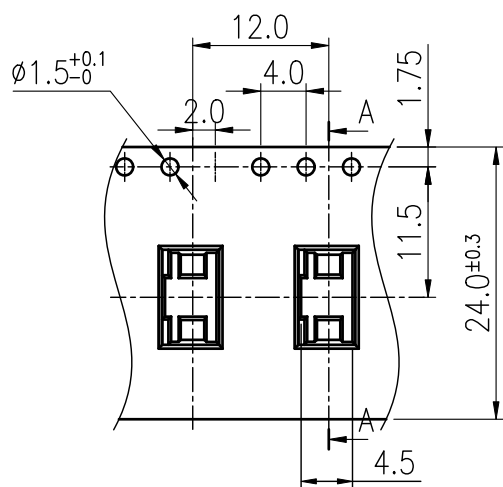


DRAWING DIRECTION _____

COVER TAPE



REEL

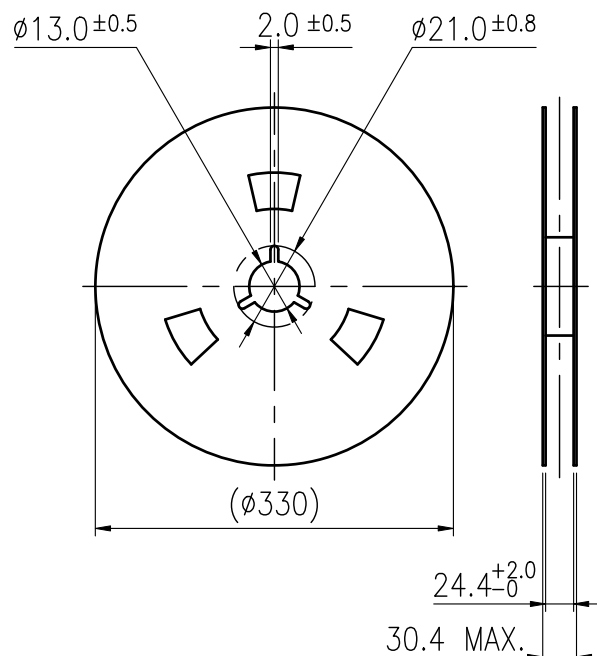

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.	
				<i>Dennis Hung</i>			Jane Shen 2015.02.11	NTC303-BD1T-L180T	
								PAGINATE:	SPEC NO.
								1/1	P-747
	NTC303-2412-93.03BA								
SYM	DISCRIPTION	DATE	APPROVED						