

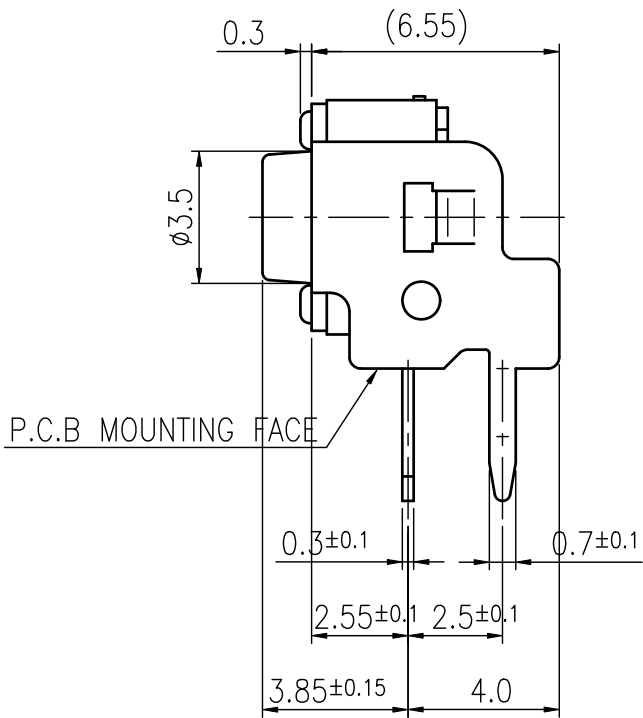



RoHS Compliant

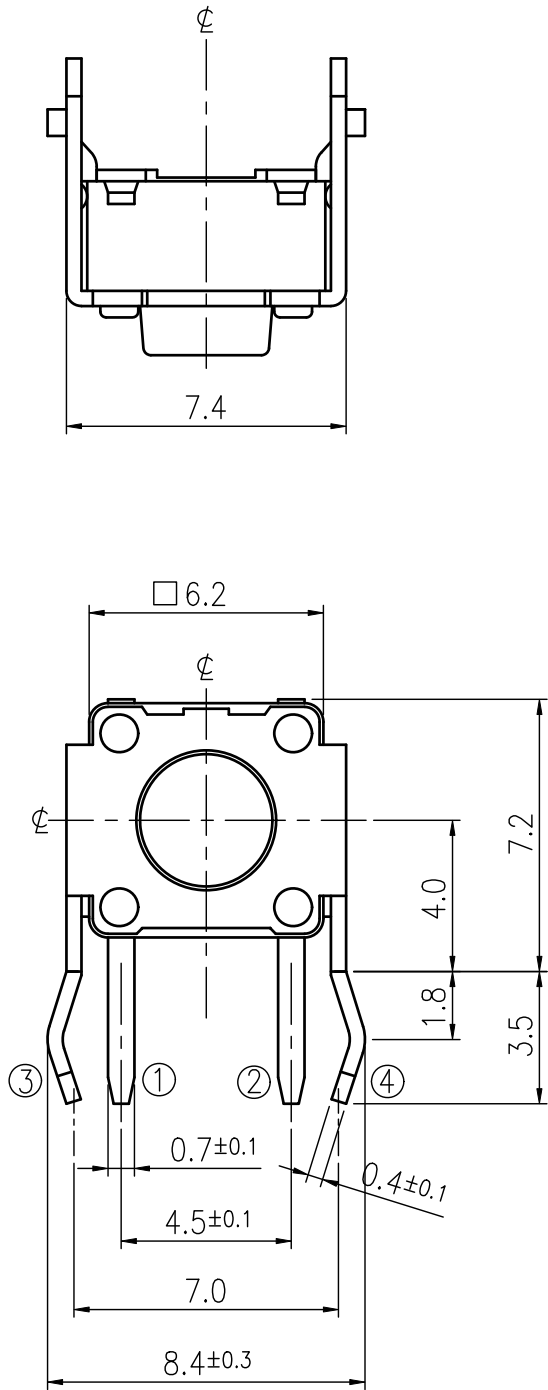

SCHEMATIC

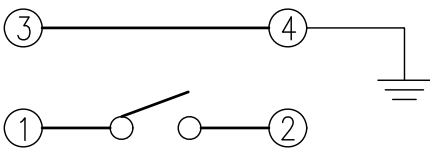

P.C.B. LAYOUT

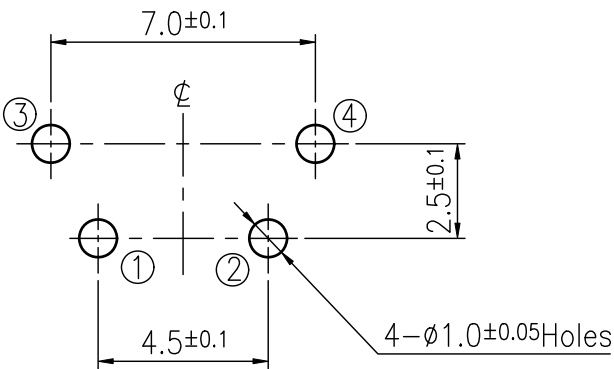

MODEL NO.	STEM COLOR
ETCV304-APD-B260-BK	BLACK
ETCV304-APD-B260-BL	BLUE

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2018.09.03	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)		260±50 gf	
INSULATION RESISTANCE		DC500V - 100MΩ MIN.		STROKE (ANGLE)		0.25±0.2 mm	
WITHSTAND VOLTAGE		AC250V - 1 MINUTE.		LIFE		200,000 CYCLES	
REMARKS:							


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen	2018.09.03	TITLE
			CHECKED			TACT SWITCH
	UNIT mm	SCALE 5/1	REVIEWED			NO.
			APPROVALS <i>Dennis Hung</i>		2018.09.03	See Model No.

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS

RoHS Compliance

1.CONSTRUCTION AND MATERIALS.

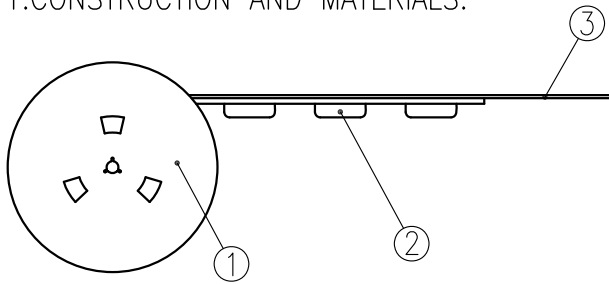

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

2. PACKAGE QUANTITY : 350 PCS/REEL.


3. MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.

4. SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNIGE POCKETS SHORTAGE IS NOT ALLOWED.

5. STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 70 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~180° .

6. THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.

7. DIMENSIONS:

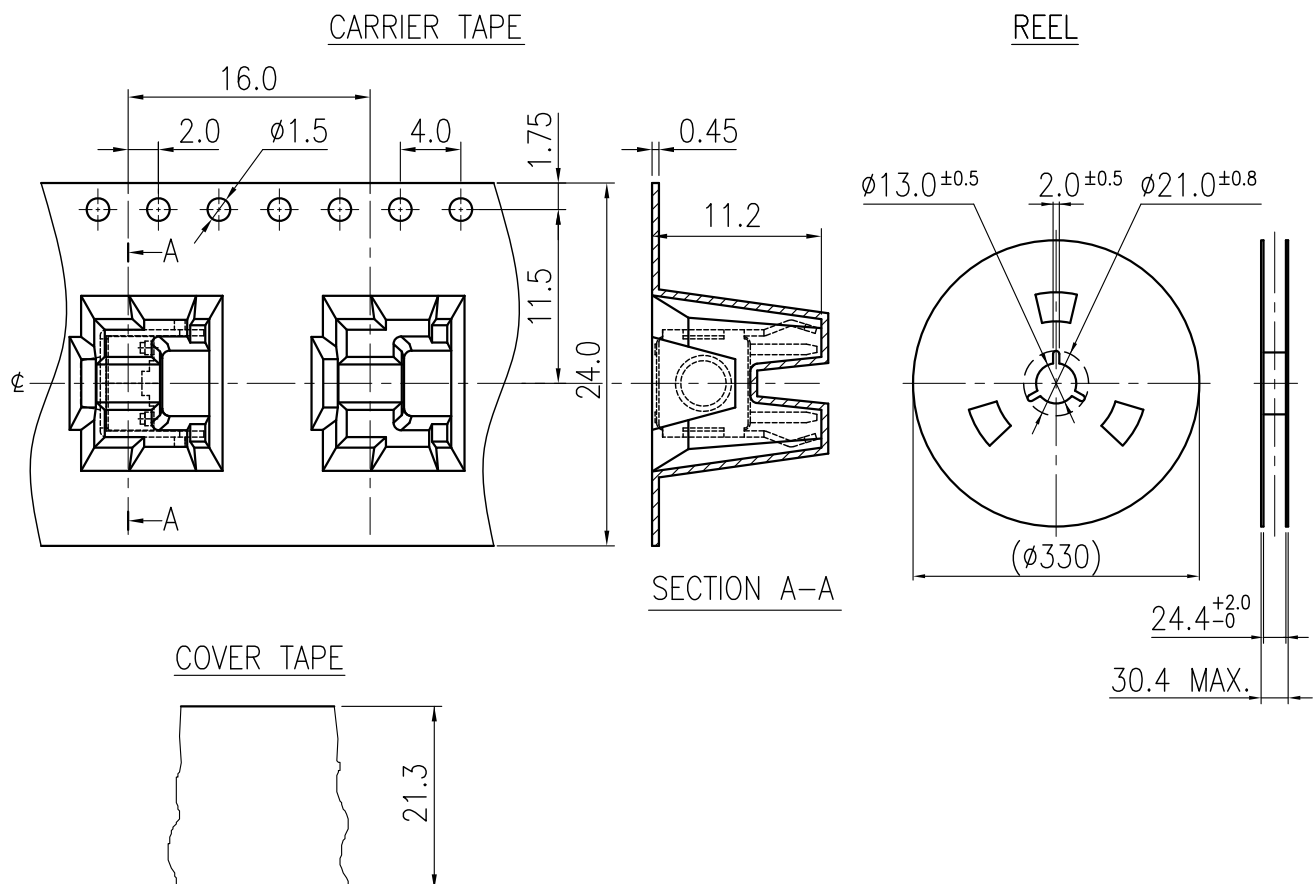

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
				<i>Fred Chen</i>	Ken Lin	Jane Shen	Catherine Lee	NTCV304-APD-B260-BK
				0521	2008.05.21	2008. 05. 21	2008. 05. 21	PAGINATE.
				2008				1/1
SYM	DISCRIPTION	DATE	APPROVED					SPEC NO.
								P-462

TAIWAN MISAKI ELECTRONICS CO.,LTD.