

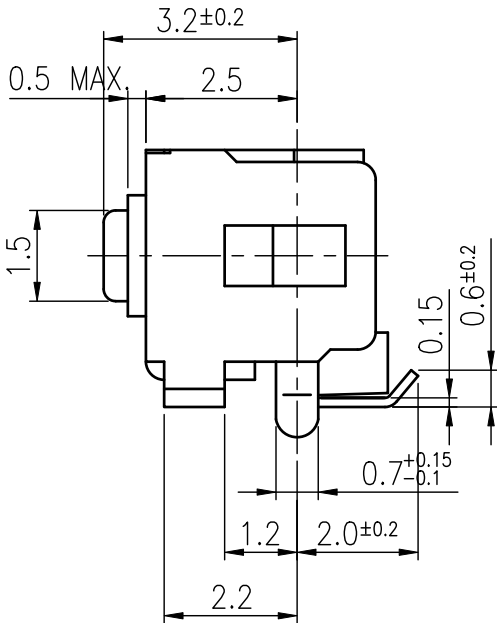
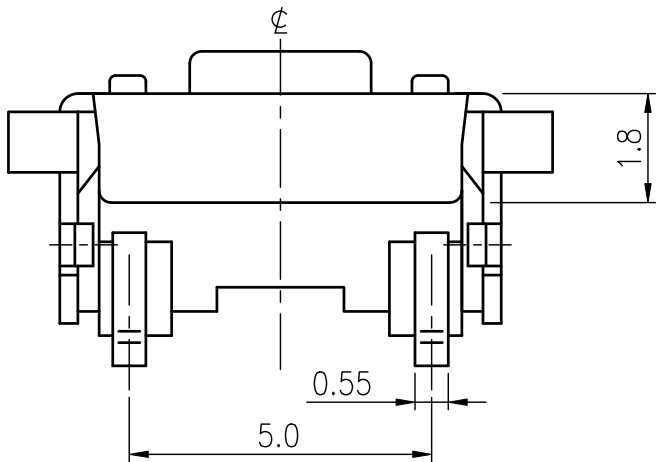
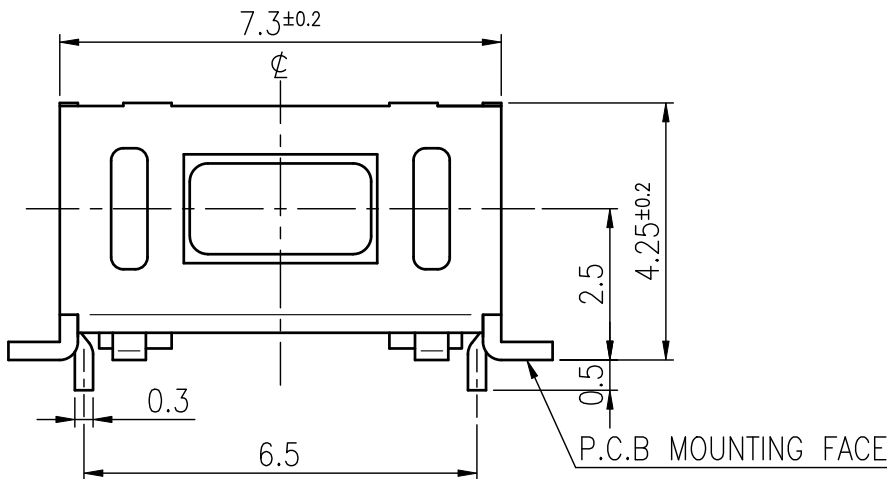



RoHS Compliant

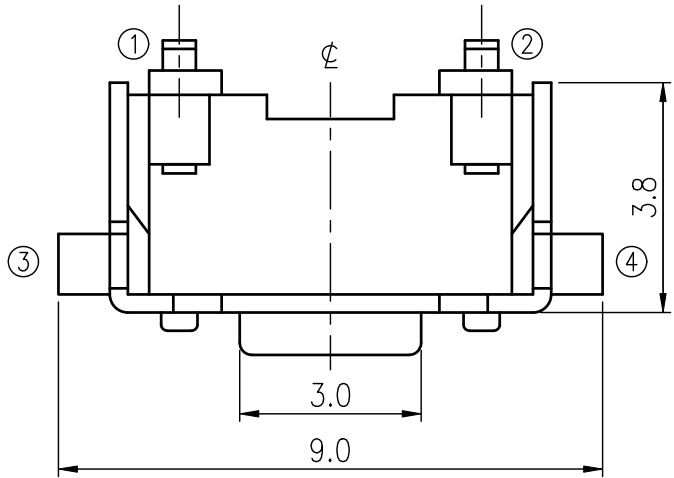


REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2016.06.21	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
CONTACT RESISTANCE		500mΩ MAX.		OPERATION (TORQUE)		250±50 gf	
INSULATION RESISTANCE		DC500V-100MΩ MIN.		STROKE (ANGLE)		0.15±0.1mm	
WITHSTAND VOLTAGE		AC250V-1 MINUTE		CONTACT RESISTANCE		1Ω MAX.	
REMARKS:				(AFTER 100,000 CYCLES LIFE TEST)			

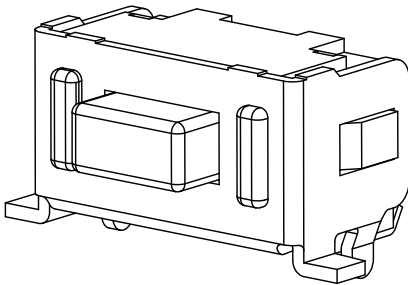

SCHEMATIC

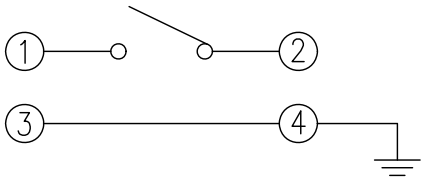

P.C.B LAYOUT

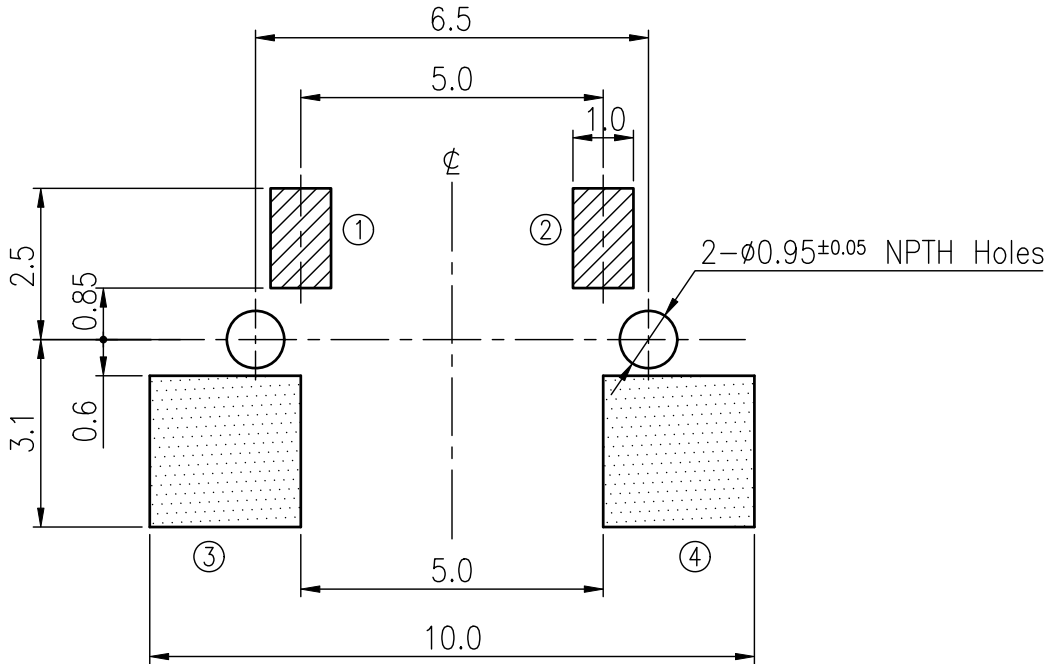

GROUND TERMINAL CAN BE EFFECTIVE EVEN IF NOT SOLDERED.

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES		DATE	MODEL	
			DRAWER	Jane Shen	2016.11.24	TITLE TACT SWITCH	
			CHECKED				
	UNIT mm	SCALE 8/1	REVIEWED			NO. ETC303-DA1J-L250C	
			APPROVALS Dennis Hung		2016.11.24		

TAIWAN MISAKI ELECTRONICS CO., LTD.