
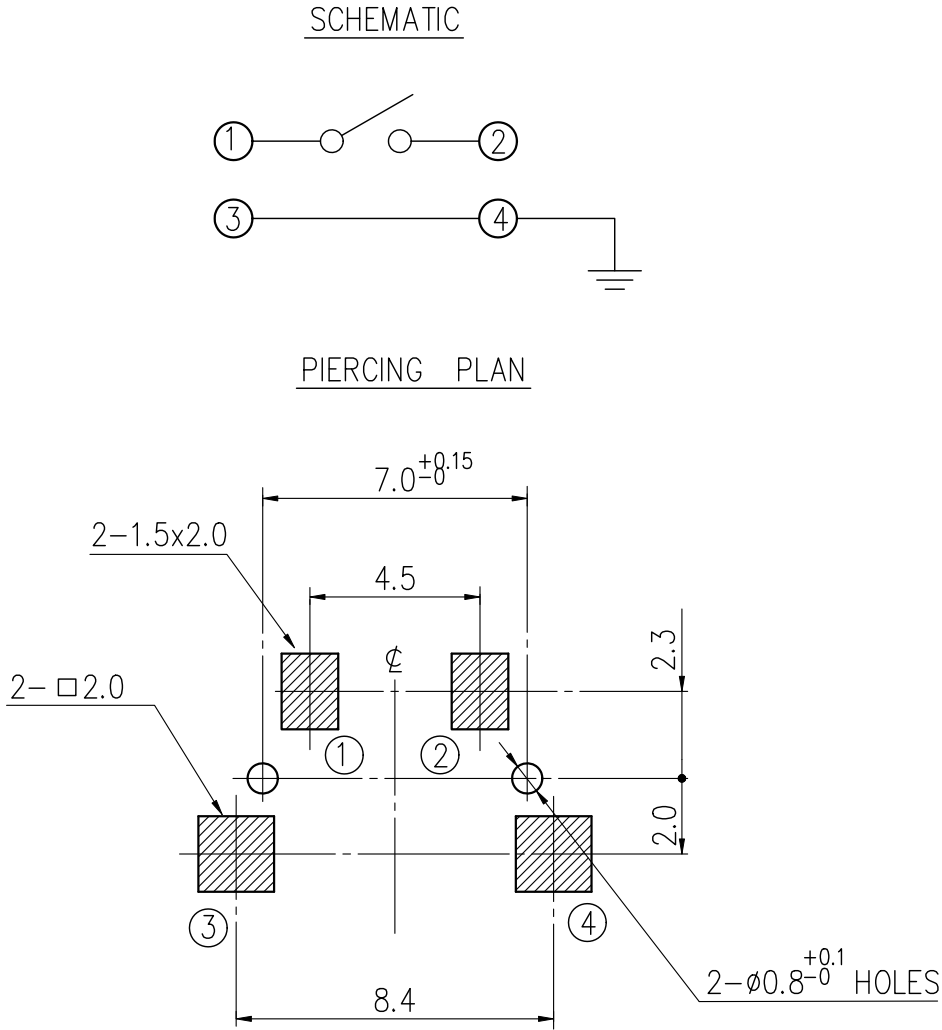
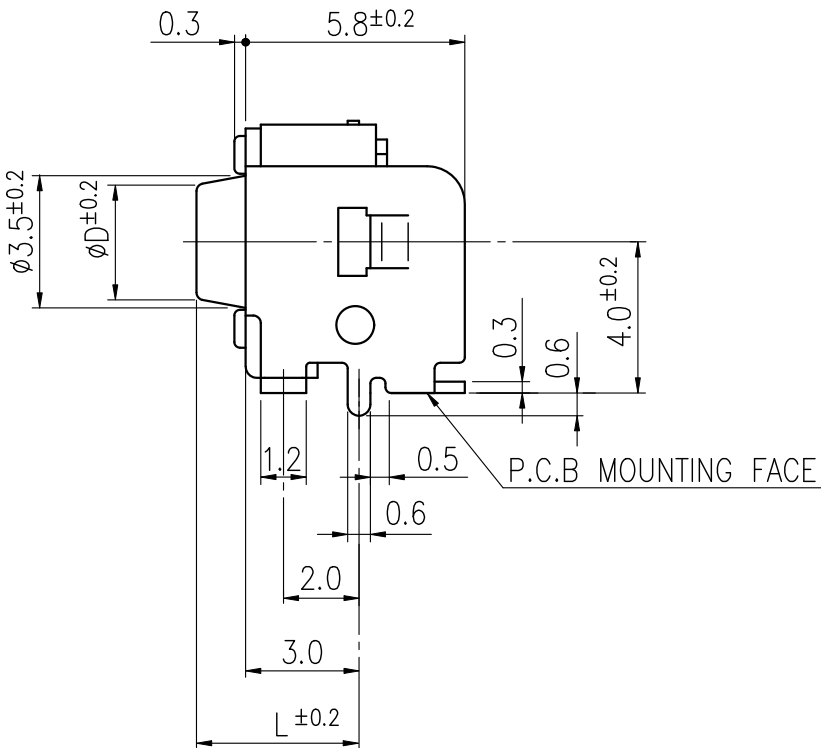


RoHS Compliant

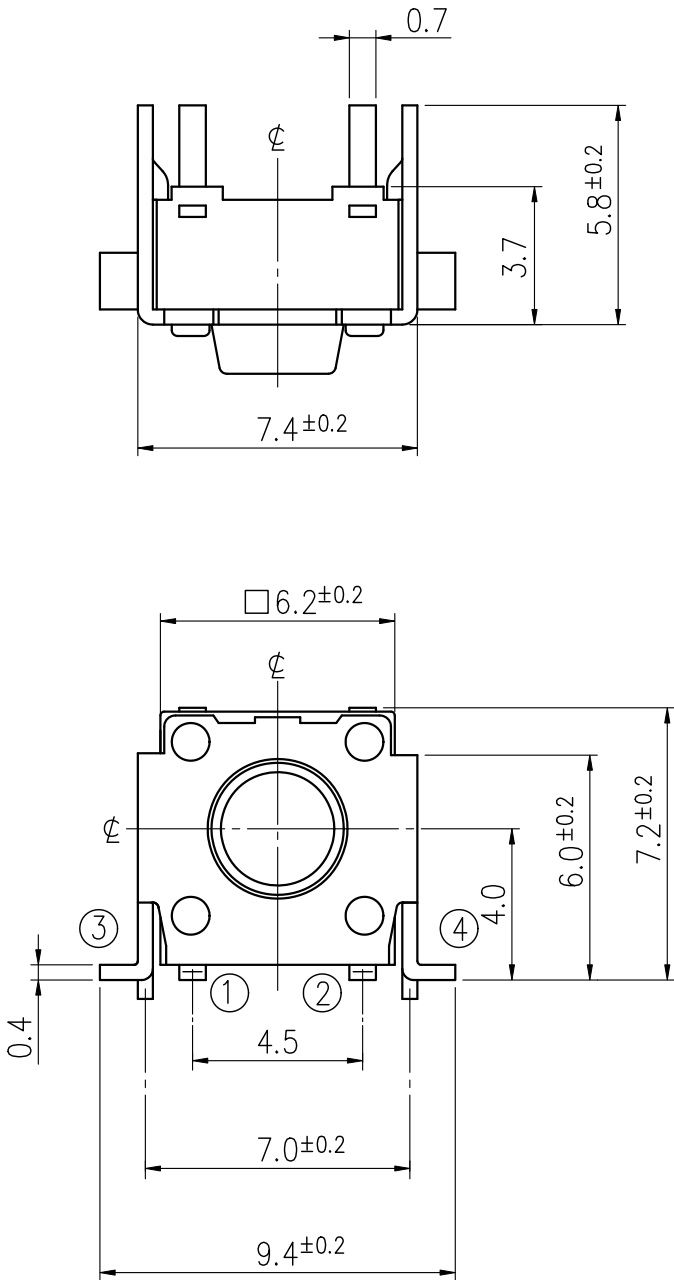


MODEL NO.	A		B		C		F		OPERATING FORCE	LIFE
	L	Ø D	L	Ø D	L	Ø D	L	Ø D		
ETC304-DE1G-C100T									100±50gf	1,000,000
ETC304-DE1G-C160T	3.6	3.5	4.3	3.5	8.8	3.0	6.3	3.0	160±50gf	1,000,000
ETC304-DE1G-C260T									260±50gf	200,000

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES		DATE	MODEL	
			DRAWN	Jane Shen	2012.10.26	TACT SWITCH	
	UNIT mm	SCALE 5/1	CHECKED	Jamie Li	2012.10.26		
			REVIEWED			NO. See Model No.	
			APPROVALS	Dennis Hung	2012.10.29		

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS

1.STRUCTURE AND MATERIALS

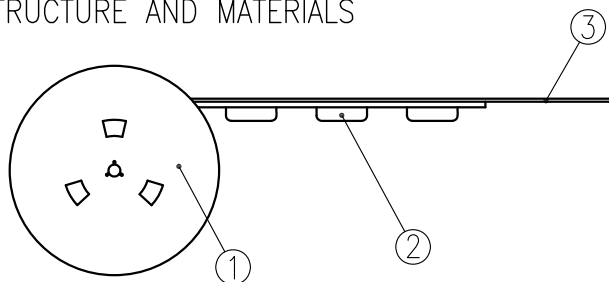


③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 500 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCEPTABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 70 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180°.
- THE SWITCH SHOULD NOT BE STAYED IN CARRIER TAPE WHEN CARRIER TAPE UPSIDE DOWN.
- END OF CARRIER TAPE IS APART FROM REEL EASILY.
- DIMENSIONS :

Tape and Reel per EIA-481.

CARRIER TAPE

REEL

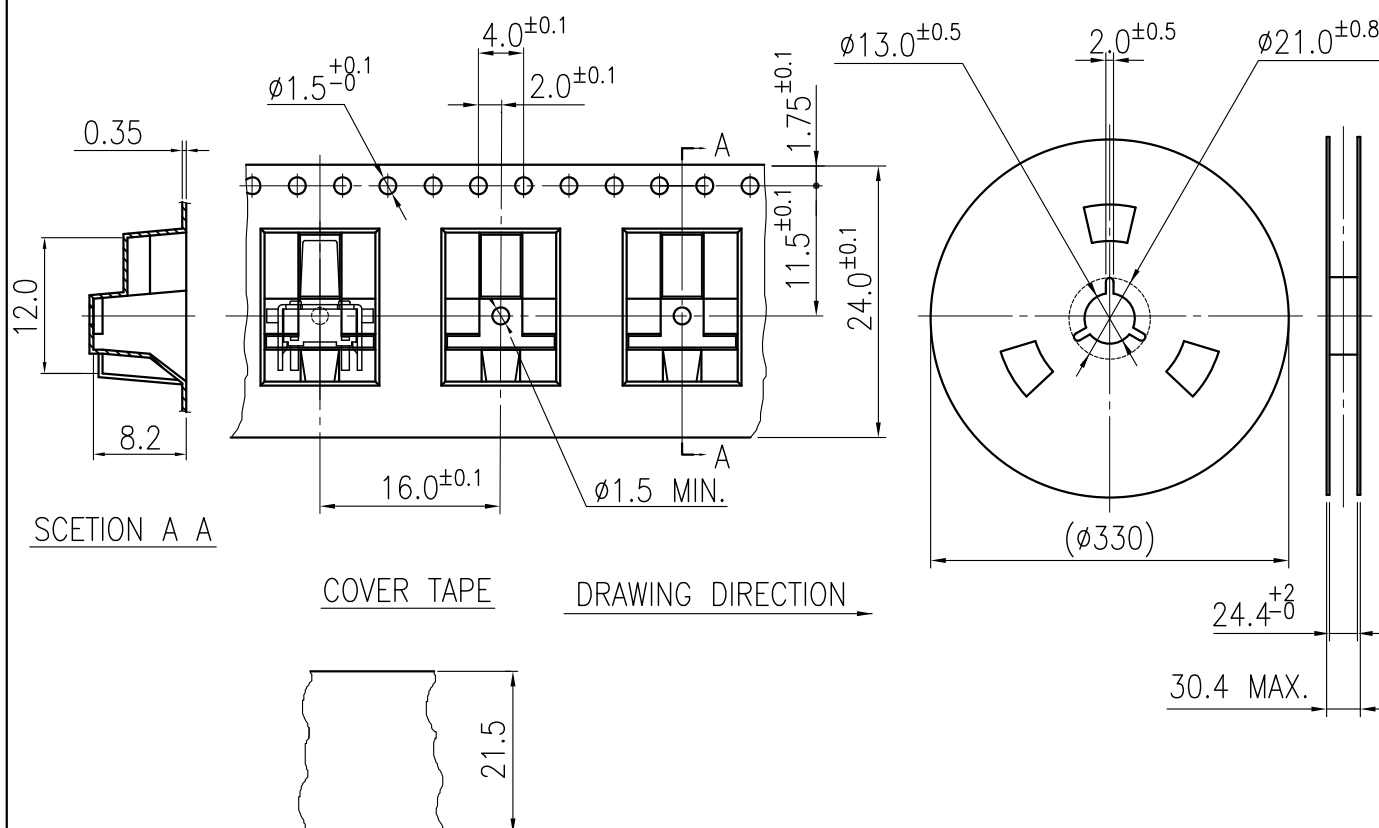

				APPROVED BY	CHECKED BY	DESIGNED BY	MODEL NO.
						Sandy Yu	NTC304-DE1G-C160T
						2006.05.18	PAGINATE.
							1/1
							SPEC NO.
							P-313
SYM	DISCRIPTION	DATE	APPROVED				

TAIWAN MISAKI ELECTRONICS CO.,LTD.