
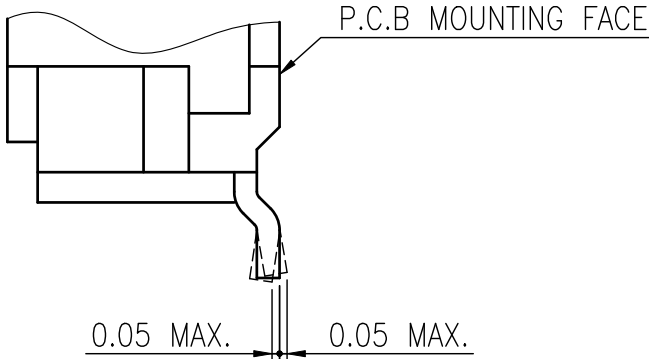
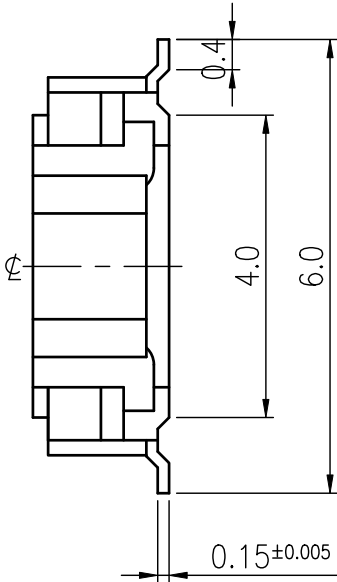
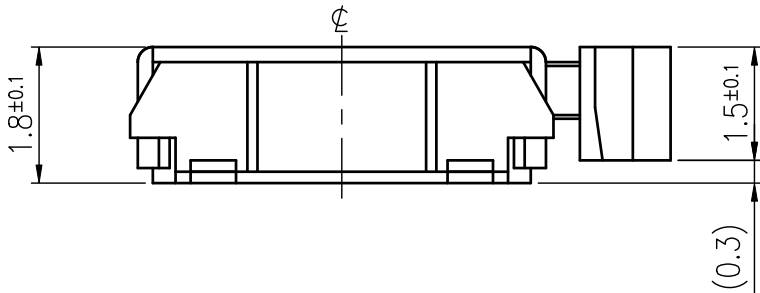
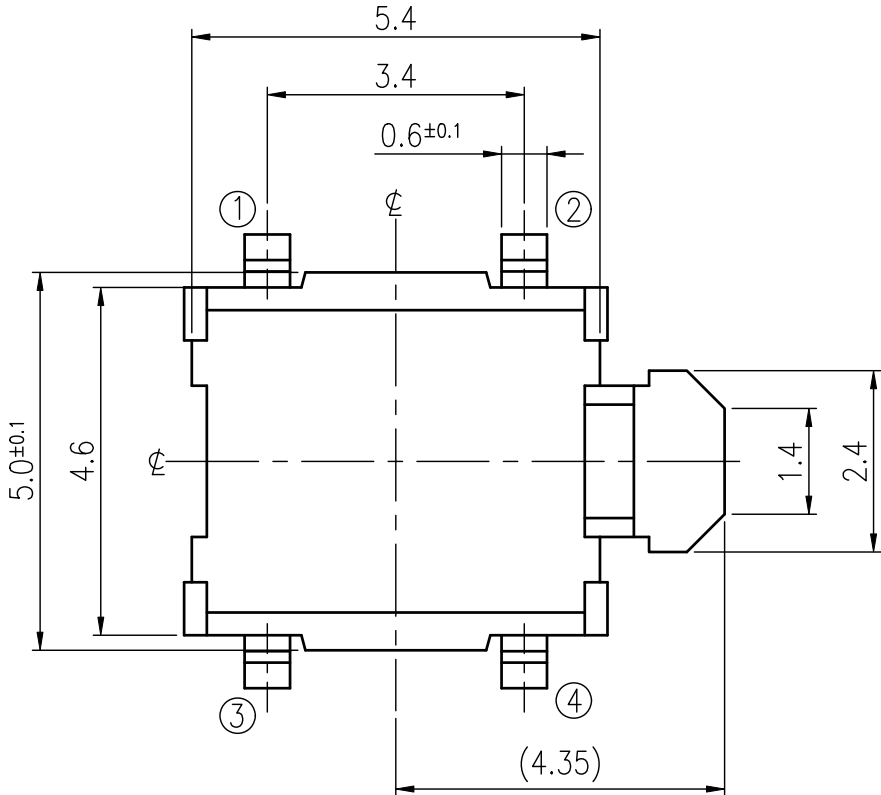



RoHS Compliant




TERMINAL DETAIL (20/1)

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2019.11.27	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
CONTACT RESISTANCE		500mΩ MAX.		OPERATION (TORQUE)			
INSULATION RESISTANCE		DC500V-100MΩ MIN.		STROKE (ANGLE)		0.2±0.12 mm	
WITHSTAND VOLTAGE		AC250V-1 MINUTE		LIFE		50,000 CYCLES	
REMARKS:							

SCHEMATIC



P.C.B. LAYOUT

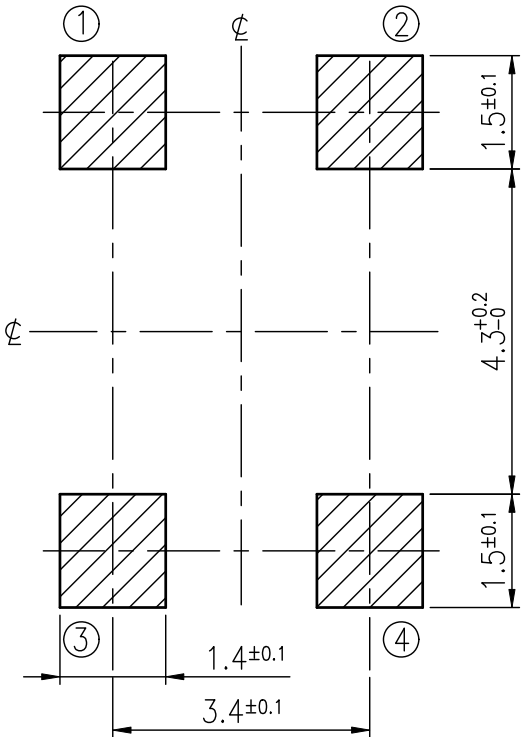

HATCHED AREA SHOWS SOLDERING LAND

MODEL NO.	OPERATING FORCE
ETC315-AF1G-A180T	180+80gf - 40gf
ETC315-AF1G-A350T	350±80gf


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.3		SIGNATURES		DATE	MODEL
		DRAWER	Jane Shen	2019.11.27	TITLE
	UNIT mm	CHECKED			TACT SWITCH
	SCALE 10/1	REVIEWED			NO.
		APPROVALS	Qiuyuan Chuang	2019.11.27	See Model No.

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS


RoHS Compliant

1.STRUCTURE AND MATERIALS

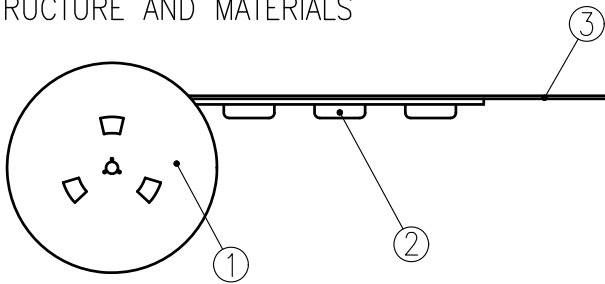

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 2,000 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180°.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

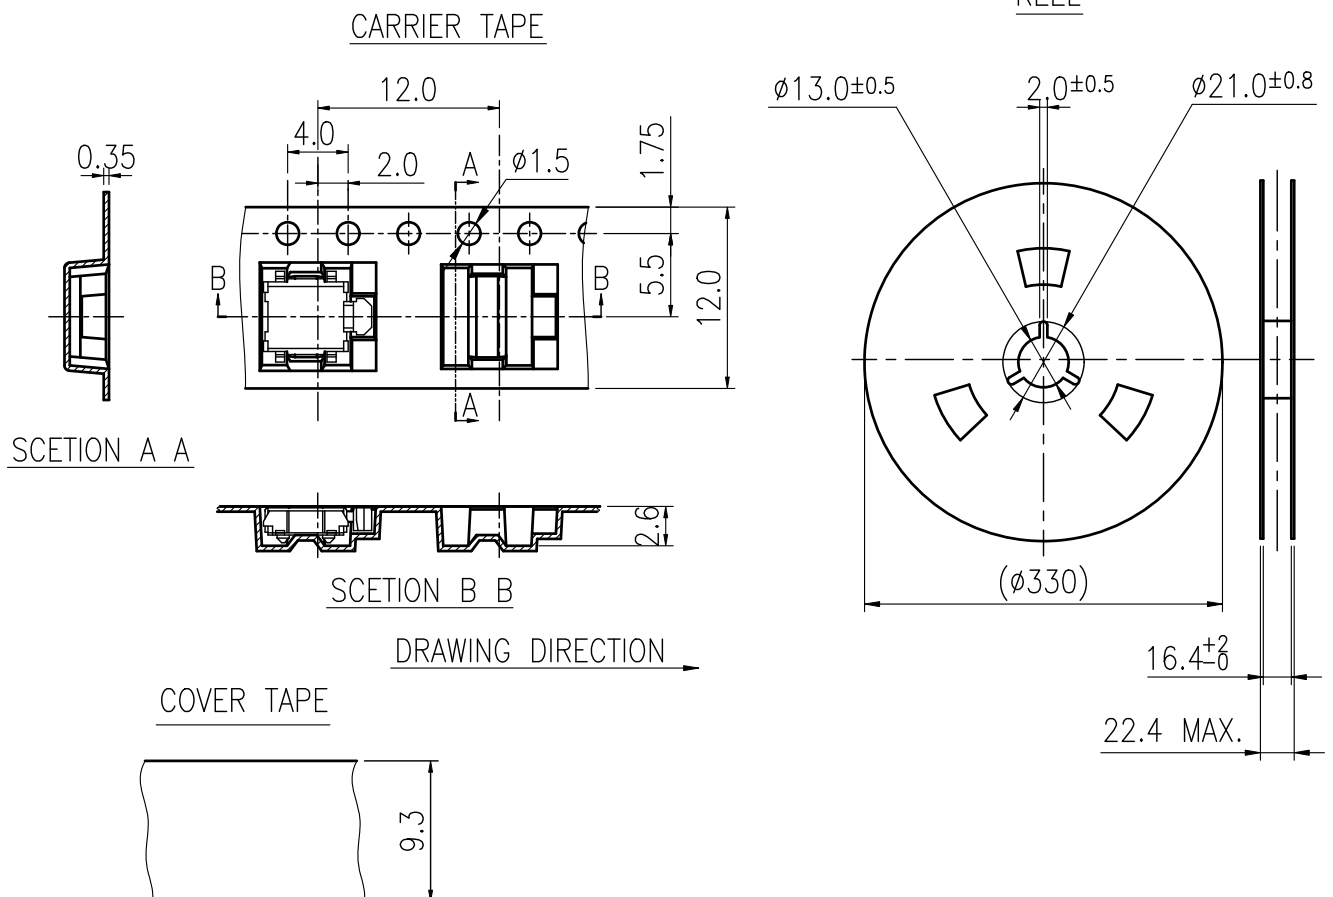

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
							Jane Shen	NTC315-A 1G-A OT
								PAGINATE.
								1/1
								SPEC NO.
								P-543
SYM	DISCRIPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.