

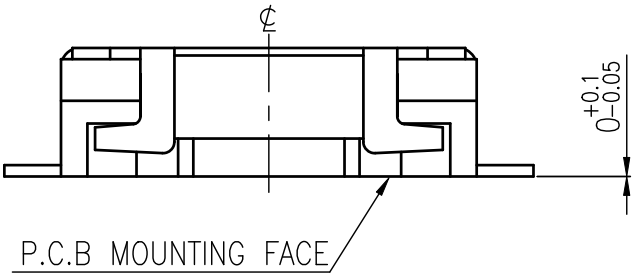
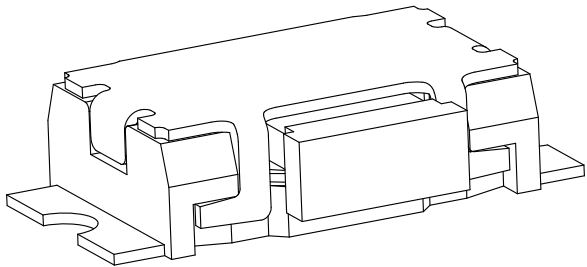



RoHS Compliant

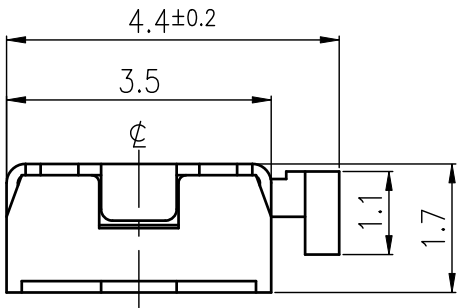


REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2019.11.26	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC32V 50mA MAX.		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)			
INSULATION RESISTANCE		DC100V-1000MΩ MIN.		STROKE (ANGLE)		0.3±0.15mm	
WITHSTAND VOLTAGE		AC250V-1 MINUTE		LIFE		100,000 Cycles	
REMARKS:							

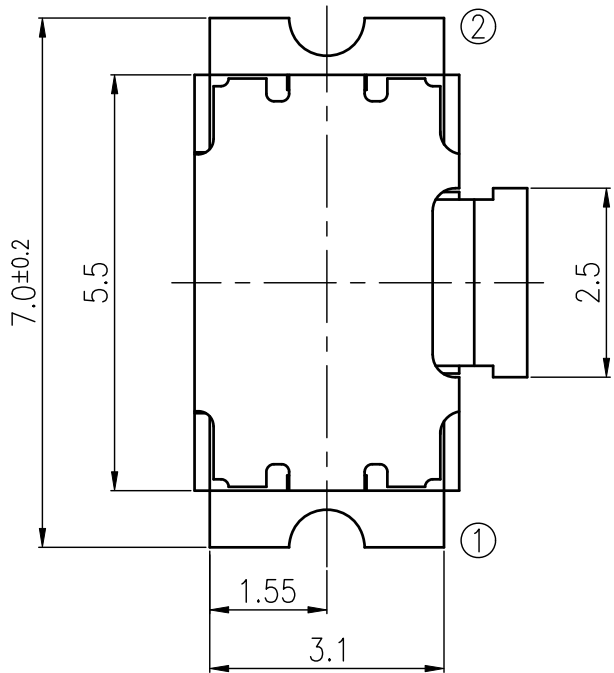

SCHEMATIC



P.C.B LAYOUT

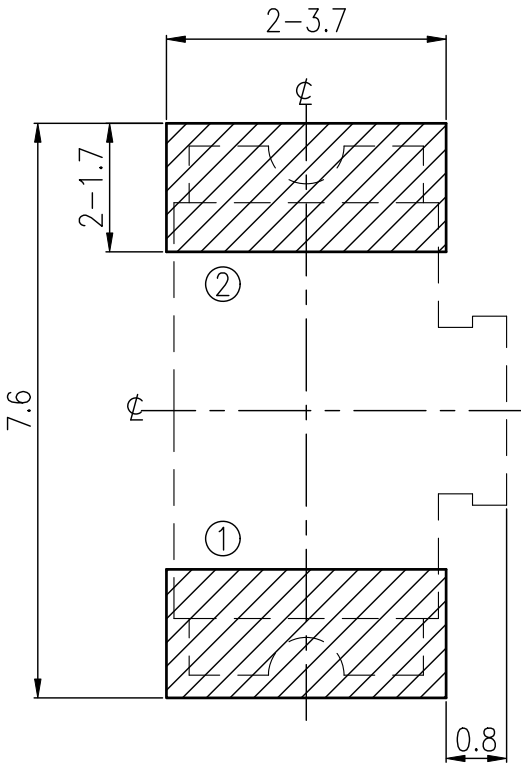

MODEL NO.	OPERATING FORCE
ETC318-AA1G-A200T	200±50gf
ETC318-AA1G-A250T	250±50gf
ETC318-AA1G-A400T	400±100gf


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES	DATE	MODEL
			DRAWER Jane Shen	2019.11.26	TITLE TACT SWITCH
			CHECKED Landry Su	2019.11.26	
			REVIEWED		NO. See Model No.
			APPROVALS Qiuyuan Chuang	2019.11.26	

TAIWAN MISAKI ELECTRONICS CO., LTD.

THE PACKING SPECIFICATIONS


RoHS Compliant

1. STRUCTURE AND MATERIALS

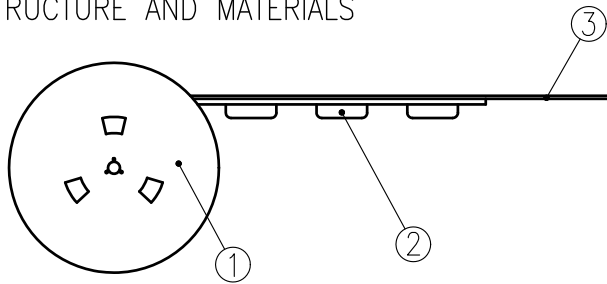

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

- PACKAGING QUANTITY : 3,000 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCETABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180° .
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481
- DIMENSIONS :

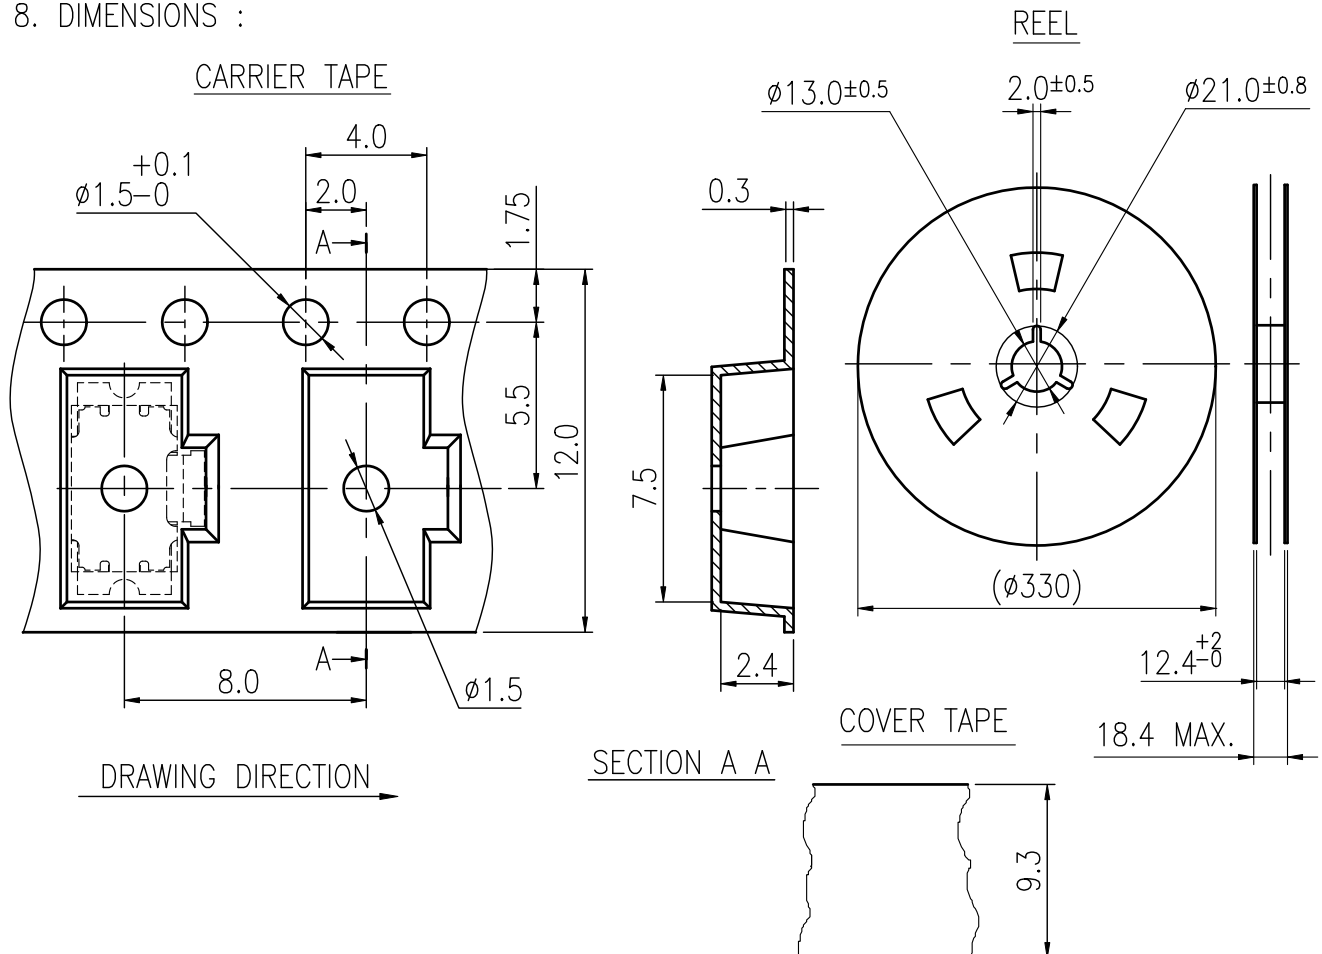

				APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
							Jane Shen	NTC_318-AA_G-A,B
								PAGINATE.
								1/1
								SPEC NO.
								P-810
SYM	DISCRPTION	DATE	APPROVED					

TAIWAN MISAKI ELECTRONICS CO.,LTD.